MissionLab

User Manual for
MissionLab version 4.0

Written by

Yoichiro Endo
Douglas C. MacKenzie
Alexander Stoytchev
William C. Halliburton
Khaled S. Ali
Tucker Balch
Jonathan M. Cameron
Zhong Chen

Edited by

Ronald Arkin

Mobile Robot Lab, College of Computing
Georgia Institute of Technology
Atlanta, GA 30332

E-mail: mlab@cc.gatech.edu
http://www.cc.gatech.edu/ai/robot-lab/

August 1, 2000

Copyright 1995 - 1997, 1999 - 2000
Georgia Tech Research Corporation (GTRC)
Atlanta, Georgia 30332-0415
ALL RIGHTS RESERVED

This software may be modified, copied and redistributed, both within the recipient's organization and externally, subject to the following restrictions:

(a) The recipient may not derive income for the Georgia Tech Research Corporation (herein "GTRC") software itself;

(b) In any derivative works based on this software, the recipient agrees to acknowledge GTRC;

(c) Any copies made of this software must be accompanied by the following copyright notice: "Copyright 1995 - 1997, 1999 - 2000 Georgia Tech Research Corporation. All rights Reserved." as well as the complete copyright notice file COPYRIGHT; and

(d) The recipient agrees to obey all U.S. Government restrictions governing redistribution or export of such information.

These restrictions may apply to redistribution within an international organization. GTRC makes no warranties or representations, either expressed or implied, with respect to the software contained herein, its quality, merchantability, performance or fitness for a particular purpose. In no event shall GTRC or its developers, directors, officers, employees or affiliates be liable for direct, incidental, indirect, special or consequential damages (including damages or loss of business profits, business interruption, loss of business information and the like) resulting from any defect in this software or its documentation or arising out of the use or inability to use this software or accompanying documentation even if GTRC, an authorized representative or a GTRC affiliate has been advised of the possibility of such damage. GTRC makes no representation or warranty regarding the results obtainable through use of this software. No oral or written information or advice given by GTRC, its dealers, distributors, agents, affiliates, developers, directors, officers or employees shall create a warranty or in any way increase the scope of this warranty. This software was developed with ARPA Grant #N00014-94-1-0215 and funded by DARPA under contract #DAAE07-98-C-LO38.

Contents

1 What is *MissionLab*? 1

1.1 *MissionLab* Overview . . . 1

1.2 *MissionLab* Development History . . . 2

2 Getting Started with *MissionLab* 4

2.1 Installing *MissionLab* . . . 4

2.2 Running Quick Example Programs . . . 6

2.2.1 Demo-1 (*mlab*) . . . 6

2.2.2 Demo-2 (*CfgEdit*) . . . 7

3 The *MissionLab* Tools 16

3.1 Running *MissionLab* . . . 16

3.2 *mlab* (User Interface Console) . . . 18

3.2.1 *mlab* Command Line Arguments . . . 18

3.2.2 X-Motif Resources for *mlab* . . . 19

3.2.3 File Utilities . . . 20

3.2.4 Obstacle Creation Dialog Box . . . 20

3.2.5 World Scale Dialog Box . . . 21

3.2.6 Time Scale Dialog Box . . . 21

3.2.7 Command Interface Panel . . . 22

3.2.8 Sound Simulation . . . 23

3.2.9 Motivational Vector Window . . . 24

3.2.10 *Telop* Interface . . . 24

3.2.11 Personality Window . . . 26

3.2.12 Robot Trails . . . 27

3.2.13 Obstacle Highlighting . . . 28

3.2.14 Movement Vector . . . 28

3.2.15 Sensor Readings Display . . . 28

3.2.16 Data Logging . . . 28

3.2.17 Debug Options . . . 29

3.2.18 Compass Window . . . 29

3.2.19 3D Display . . . 30

3.2.20 Help Menu . . . 31

3.3 Robot Executables . . . 32
3.4 *CfgEdit* (Configuration Editor) . . . 33
3.4.1 Setting Up the Environment . . . 33
3.4.2 Running *CfgEdit* . . . 35
3.4.3 Browsing the Configuration Tree . . . 36
3.4.4 Building a Mission . . . 40
3.4.5 Using Waypoints Tool . . . 45
3.4.6 Using Path Planning Tool . . . 45
3.4.7 Analyzing and Compiling the Robot Executable . . . 51
3.4.8 Executing the Robot Executable . . . 52
3.4.9 Adding New States and Triggers . . . 54
3.5 CDL (Configuration Description Language) . . . 59
3.6 CNL (Configuration Network Language) . . . 64
3.7 CMDL (Command Description Language) . . . 68
3.7.1 Mission background information part . . . 68
3.7.2 Mission Command List Part . . . 72
3.7.3 Example Command Description File . . . 75
3.8 ODL (Overlay Description Language) . . . 76
3.8.1 Scenario Information Part . . . 76
3.8.2 Control Measure Description Part . . . 77
3.8.3 Example Overlay Description File . . . 79
3.9 *HServer* (Hardware Server) . . . 81
3.9.1 Command line arguments . . . 81
3.9.2 Environment Variables . . . 82
3.9.3 User Interface and Key Commands . . . 82

4 Support Software **87**
4.1 Communications Software IPT . . . 87
4.2 Process Control Software C-Threads . . . 87

5 Current Limitations of *MissionLab* **88**

6 Feedback and Bug Reports **90**

1 What is *MissionLab*?

1.1 *MissionLab* Overview

MissionLab is a powerful set of software tools for developing and testing behaviors for single robots and a group of robots. Code generated by *MissionLab* can directly control commercial robots. Pioneer AT (ActivMedia, Inc.), Urban Robot (Real World Interface, a Division of IS Robotics, Inc.), Nomad-150 and 200 (Nomadic Technologies, Inc.) and MRV-2 (Denning Mobile Robotics, Inc.) are among those robots *MissionLab* has implemented successfully. A primary strength of *MissionLab* is its support of both simulated and real robots. A developer can experiment with behaviors in simulation and then run those same configurations on mobile robots (Figure 1).

MissionLab has a distributed architecture. Thus, the main user's console can run on one computer while multiple robot control executables are distributed across a network, potentially on-board the actual robots they control.

The core of the *MissionLab* tool-set is composed of five primary components:

- *mlab*: *mlab* is a console-like program from which a user monitors the progress of experimental runs of the robot executables. Locations of the robots and detected obstacles are examples of various data *mlab* can monitor. When *mlab* is used for simulation (as opposed to controlling mobile robots), it serves as a sensor and actuator simulator from the point of view of the robot executable. On mobile robots, the actual sensors are used instead. Details of *mlab* are described in Section 3.2.

- *CfgEdit*: The Configuration Editor, or *CfgEdit*, is a graphical tool for building robot behaviors. The designer can build complex control structures with the point and click of a mouse. *CfgEdit* generates source code which, when compiled, can directly control a simulated or real robot. Details on *CfgEdit* are provided in Section 3.4.

- *cdl*: The *cdl* code generator translates the CDL (Configuration Description Language), which is generated by *CfgEdit*, into CNL (Configuration Network Language) code. In general, users will not need to be concerned with CNL. However, because programming in CNL is very similar to programming in the C language, advanced users may develop their own primitive behaviors and store them as a library and/or write their own control programs without using *CfgEdit*. CDL is explained in Section 3.5, and CNL is explained in Section 3.6. However, for details on CNL, please read the separate CNL manual.

- *cnl*: The *cnl* compiler compiles CNL code generated by the *cdl* code generator, and produces C++ code. Once this C++ coded is compiled with the GNU C Compiler (gcc), the compiled program (or robot executable) may now directly control a robot. The *cnl* compiler is automatically invoked by *CfgEdit* when needed.

- *HServer*: *HServer* (Hardware Server) directly controls all the robot hardware, either via TCP/IP or a serial link, and provides a standard interface for all the robots and sensors. The *CfgEdit* generated code uses this standard interface to control the real robots. *HServer* also provides direct control, configuration, and status of the robots and sensors. Details on *HServer* are described in Section 3.9.

In addition to CDL and CNL described above, there are two more original languages that were specifically developed for the *MissionLab* system:

- **CMDL**: The Command Description Language (CMDL) may optionally be used for describing simple sequential robot missions. A CMDL file, containing both background and command information, will be read by *mlab* at runtime and offer a mechanism for providing high-level input to robot behaviors developed in CNL. When robot executables are directly created by *CfgEdit*, users may not need to use CMDL. CMDL is described in Section 3.7.

- **ODL**: The Overlay Description Language (ODL) provides descriptions of the environment, which *mlab* can graphically translate to a map or a floor plan of an experimental area. For example, a robot's starting point, obstacles, boundaries, are among those features that ODL can describe. ODL is described later in this manual (Section 3.8).

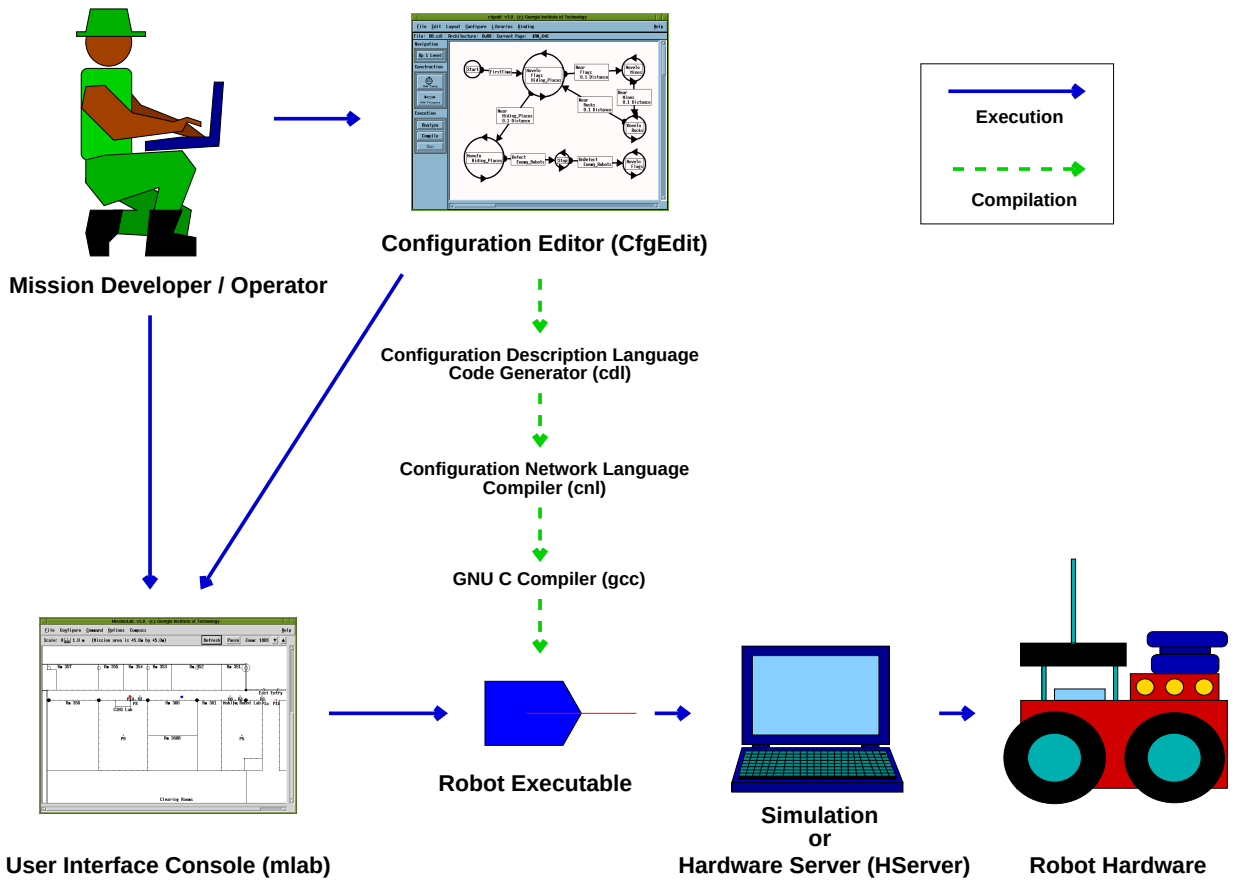

Figure 1: *MissionLab* Components: the mission developer can create a mission for a robot or a group of robots with the Configuration Editor (*CfgEdit*). Once the mission is created, it can be compiled as a robot executable, which will give commands to the robot hardware or its embedded low-level software via Hardware Server (*HServer*). The robot executable is executed by the User Interface Console (*mlab*), and *mlab* can be invoked by both *CfgEdit* and the operator. *mlab* can also run a simulation before the actual real robot run.

1.2 *MissionLab* Development History

MissionLab is a product of ongoing work in the College of Computing at Georgia Institute of Technology (Georgia Tech), which addresses several aspects of configuring and controlling teams of robots, particularly in realistic military scenarios. This work has been initially conducted under the Defense Advanced Research Projects Agency (DARPA) task "Flexible Reactive Control for Multi-Agent Robotic Systems in Hostile Environments" (DARPA Task #A447). The main goal for this project was to control the motion of a robot or groups of robots in highly dynamic, unpredictable, and possibly hostile environments. Much of our work in reactive control was applicable to suitably controlling the motion of individual robots [2] as well as the motion of teams of robots [4]. Since the release of *MissionLab* version 2.0, the research and development

of *MissionLab* have been sponsored by DARPA for the Tactical Mobile Robotics (TMR) [3] and Mobile Autonomous Robot Software (MARS) programs.

When developing software to control teams of robots prior to *MissionLab*, it become apparent that manually determining each configuration of robots and their control software, hard-coding a task, and controlling task execution was complex and error-prone. Thus, part of our research aimed towards the reduction of this complexity by developing tools for configuring robots and their individual control software [8]. We began to focus on the ability to specify the instructions for a task in such a manner that computer software can interpret them and decide which commands to send to each robot (simulated or real). As a result, the *MissionLab* structure of five primary components *mlab*, *CfgEdit*, *cdl*, and *cnl* was developed, and they were included in earlier *MissionLab* versions.

Since the release of *MissionLab* version 3.0, we have switched the target operation system from SunOS to Linux. Current *MissionLab* version 4.0 runs on RedHat Linux version 6.0 or higher. We have also fixed a number of bugs and added a new list of states and triggers that can be applied for urban warfare operations. Version 4.0 includes a new tool, *HServer*, which can control various hardware, including the Pioneer AT robot, Urban Robot, Nomad 200, SICK laser scanner, Sony EVI camera, etc. The recent focus of our TMR research involves usability studies of the *MissionLab* system, and, we are improving the user interface to be even more user-friendly in order to provide a mission specification system which can be used by any novice user. In other ongoing research, we are adding a framework to *MissionLab* that enables robots to synthesize the desirable features and capabilities of both deliberative (symbol-mediated) and reactive (sensor-mediated) control.

2 Getting Started with *MissionLab*

2.1 Installing *MissionLab*

Please go through the following steps to compile and install *MissionLab* on your system:

1. **Ensure you have the required software.** We have compiled *MissionLab* with the following operating system and support software. It will probably compile with later releases, but minor changes might be necessary.
   - **RedHat Linux 6.0 or higher**
   - **GNU gcc 2.91.66 (egcs 1.1.2)**
   - **GNU flex 2.5.4**
   - **GNU bison 1.27**
   - **X11R5 or X11R6**
   - **perl 4 or 5**
   - **tcsh or csh**
   - **RedHat Motif 2.0 or LessTif 0.88.x**
2. **Obtain the *MissionLab* distribution** (if you haven't yet)**.** You can download the latest distribution of *MissionLab* (mlab-4.0.tar.gz) from our web page:

   `http://www.cc.gatech.edu/aimosaic/robot-lab/research/MissionLab/`

   Note: Supporting Software is included with the *MissionLab* distribution. You are not required to take any special steps regarding this software, but we list it here to credit the developers and point out copyright restrictions:
   - IPT - A version of IPT is part of the *MissionLab* source tree. IPT is an interprocess communication system developed at CMU. Also see the file README.IPT. This release of the *MissionLab* was developed with version 8.4 of IPT. If you wish, you can ftp the package from: ftp://ftp.cs.cmu.edu/afs/cs.cmu.edu/data/anonftp/user/jayg/ (get ipt-8-4.tar.gz and IPTManual.ps.gz). Due to copyright restrictions, IPT MAY NOT BE USED FOR COMMERCIAL PURPOSES.
   - CThreads - A version of CThreads is now part of the *MissionLab* source tree. It should compile directly on Linux (or SunOS). CThreads is a lightweight process threads package from Georgia Tech which operates under Linux, SunOS and many other OSs. If you wish, you can ftp the package from: `ftp://ftp.cc.gatech.edu pub/software/cthreads/ithreads_distribution.tar.gz`
   - sphigs - Sphigs and srgp are used for the 3D display option. They are included in the *MissionLab* source tree. Sphigs can be found at `ftp://ftp.cs.brown.edu`.
3. **Delete any old versions of *MissionLab* in your source tree.** Old versions may have files incompatible with the new version.
4. **Unpack the *MissionLab* distribution.** Make a directory for *MissionLab* and copy the distribution (mlab-4.0.tar.gz) there. This directory will be referred to as the "MissionLab home" directory. Uncompress and untar the distribution as follows:

   `cd mission` (or wherever your MissionLab home is)
   `tar -xvzf mlab-4.0.tar.gz`

5. **Edit a configuration file.** Edit [*your MissionLab home*]**/src/make.include** to point to the correct places for your system. The makefiles in the src directories reference these files, so changing them once should fix all the makefiles. The following are key places in the make.include to look for:

   - Set the `MLAB_HOME` variable to point to your home directory for *MissionLab*. This should include the full directory path.
   - Set `XDIR` to point to the X directory on your system. This is usually either /usr/local/X11R5 or /usr/local/X11R6.
   - If the program will run on ONLY one type of machine and one windowing environment, set the `MLAB_STATIC` flag to be empty. This will force *MissionLab* to use shared libraries. Static linking has the advantage of enabling a compiled version of *MissionLab* to run on similar systems with slightly differing runtime libraries (e.g. openwindows vs X11R5). Some distributions of linux only include shared libraries, so static linking won't work.
   - If you are using different versions of gcc, you will probably need to edit `EXTRA_INCS` to fix the references to the gcc include directories.
   - If you have trouble compiling any of the telop code (in src/telop), you can disable telop by commenting out several lines in the makefiles in the [*your MissionLab home*]/src/robot and [*your MissionLab home*]/src/mlab directories (look for TELOP).

6. **Compile**: Compile *MissionLab* with the following commands:

   `tcsh (or csh)` - Make sure you are using C-shell
   `cd src`
   `make veryclean` - To ensure all old stuff is cleaned out.
   `./configure.cthreads` - To configure Cthreads, you only need to run this once.
   `make depend` - This may generate numerous warnings that can be safely ignored.
   `make all` - This will begin the compile of the entire system.

7. **Set up your user environment.**

   - Add [*your MissionLab home*]/bin into your execution path. It is not necessary to move the executable files to the bin directory because there are symbolic links from the bin directory to the executable files.
   - Add "." into your execution path.

8. **Setup the CfgEdit environment** (optional)**.** If you are planning to use *CfgEdit* to create your own robot executables, you may want to setup the environment for *CfgEdit* at this point. Edit "**.cfgeditrc**" in [*your MissionLab home*]/src/cfgedit. In the file, replace all "/net/hr1/robot/mission"s with the full path of your "MissionLab home". For details on how to setup and use *CfgEdit*, see Section 3.4.

At this point, the installation is completed, and you should be able to run the *MissionLab* system.

2.2 Running Quick Example Programs

To check if your installation of *MissionLab* has been properly compiled, you can run several demo programs that are included in the *MissionLab* package. Here are two of those example programs that might help you to understand how *mlab* and *CfgEdit* work in the *MissionLab* system.

2.2.1 Demo-1 (*mlab*)

Run *demo_marc* and you should be able to observe what *mlab* (*MissionLab* User Interface Console) looks like. Type the following commands (Note: "marc" stands for Manufacturing Research Center at Georgia Tech, where our Mobile Robot Laboratory is):

`tcsh (or csh)` - Make sure you are using C-shell
`cd [`*your MissionLab home*`]/demos/tmr_demos`
`which mlab` - Make sure [*your MissionLab home*]/bin is in your execution path
`demo_marc`

At this point, if your screen pops up the *mlab* console (Figure 2), and the robots start moving, *MissionLab* is running successfully. To quit the program, click "File" in the menu bar, and select "Quit". See Section 3.1 for more details on how to use *MissionLab*.

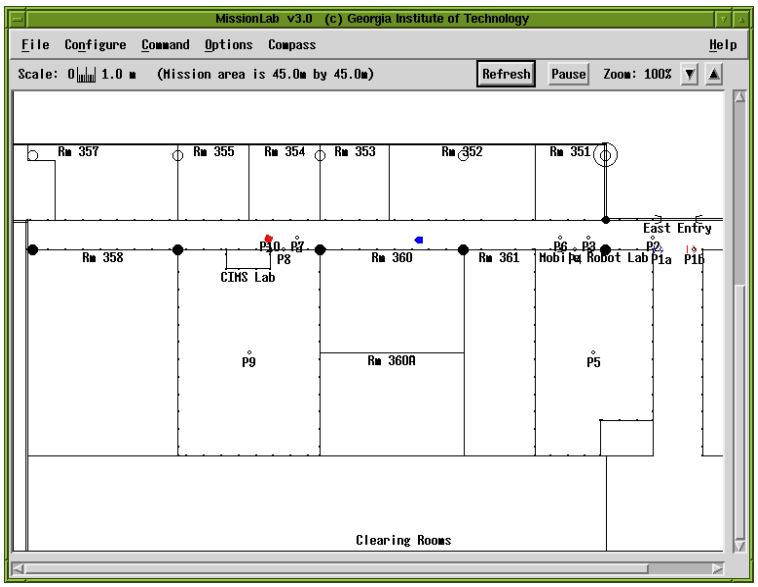

Figure 2: Example scenario being executed in *MissionLab*

2.2.2 Demo-2 (*CfgEdit*)

At this point, you may also want to check to see if *CfgEdit* works properly in your new installation. After making sure you set up the *CfgEdit* environment according to the instructions in Section 2.1, follow these steps to create a "back_and_forth"-robot using *CfgEdit* :

1. **Go to appropriate directory**
   - In the directory you are going to run *CfgEdit*, make sure that there is "Empty.ovl". You need this to load the default overlay when you invoke *mlab* from *CfgEdit*.

     ```
     % cd [your MissionLab home]/demos/pioneer_demos
     % ls Empty.ovl
     ```

2. **Run iptserver**
   - You must be running *iptserver* when the *CfgEdit* invokes *mlab*. Read Section 3.1 for the explanation.

     ```
     % iptserver &
     ```

3. **Run CfgEdit**
   - If you launch *CfgEdit* with the following command, its window (Figure 3) will pop up on the screen.

     ```
     % cfgedit
     ```

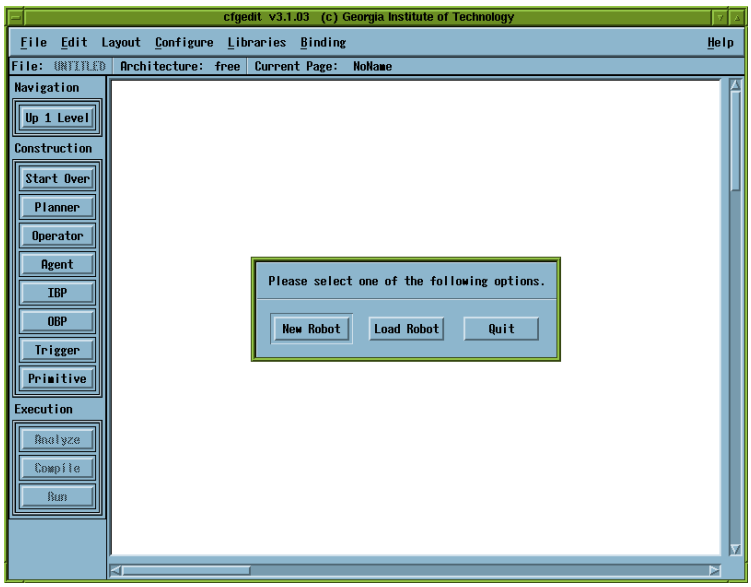

Figure 3: *CfgEdit* Window

4. **Move to FSA diagram**
   - After choosing "`New Robot`" from the first selection, *CfgEdit* will show the top level of the configuration (Figure 4).

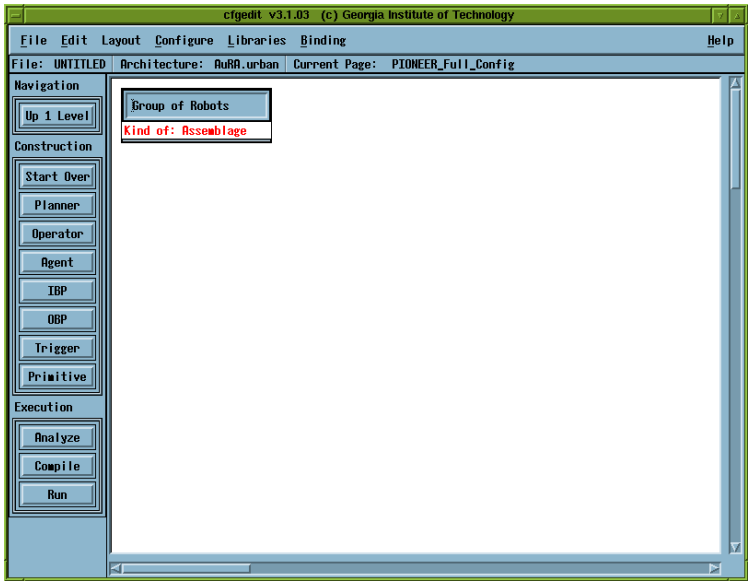

Figure 4: *CfgEdit* - the top level

- Click the box labeled with "Kind of: Assemblage" under the heading "Group of Robots" with the middle button of the mouse (middle-click).
- If you middle-click again in the box for "Instance of: PIONEERAT", you will see the display like the one in Figure 5.
- By middle-clicking the box for "Instance of: FSA" under "The State Machine", you can reach the Finite State Acceptor (FSA) diagram window (Figure 6).

5. **Constructing a Back_and_Forth Robot**

- At this moment, you should see a circle labeled "Start" (Figure 6). This circle indicates the robot's "start" state. Now, you will add its first "GoTo" state by left-clicking the `Add Tasks` button located in the left menu bar.
- Move the pointer into the display area, and left-click again. You will see a new state whose default is "Stop" (Figure 7).
- In order to modify the state into another state, right-click the "Stop" state, and choose "GoTo" (left-click) from the list (Figure 8).
- Make sure you have created the new "GoTo" state as it is shown in Figure 9, and change the goal location by middle-clicking the state.
- Type in a goal location (in the world coordinate), for example, to be X = 10, and Y = 20 (Figure 10).
- Now, in order for the robot to have a transition from one state to another, you need to add a trigger. Left-click the `Add Triggers` button located in the left menu bar, press down the left button of the mouse in the "Start" state, drag the arrow to the "GoTo" state, and release it. You will find a trigger connected between those two states (Figure 11). If you click the `Add Triggers` button by mistake, you can cancel this process by selecting "Cancel" in the "Layout" menu.
- By repeating the procedures above, add another "GoTo" state (X = 30 and Y = 20), and connect the first "GoTo" state to this one with a trigger.
- The trigger connected between the first "GoTo" state and the second "GoTo" state should have automatically appeared as "AtGoal", and the value for the goal location should be automatically copied from the first "GoTo" state (<10, 20>). Even though this is correct and you do not have

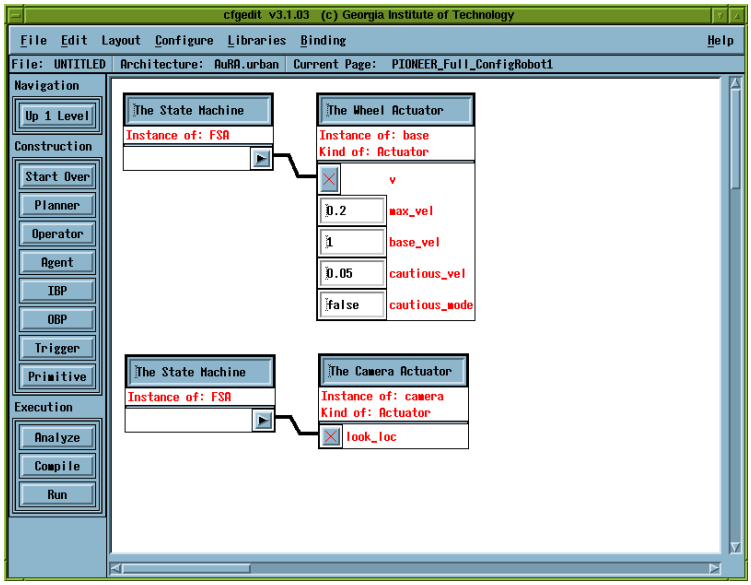

Figure 5: *CfgEdit* - the third level

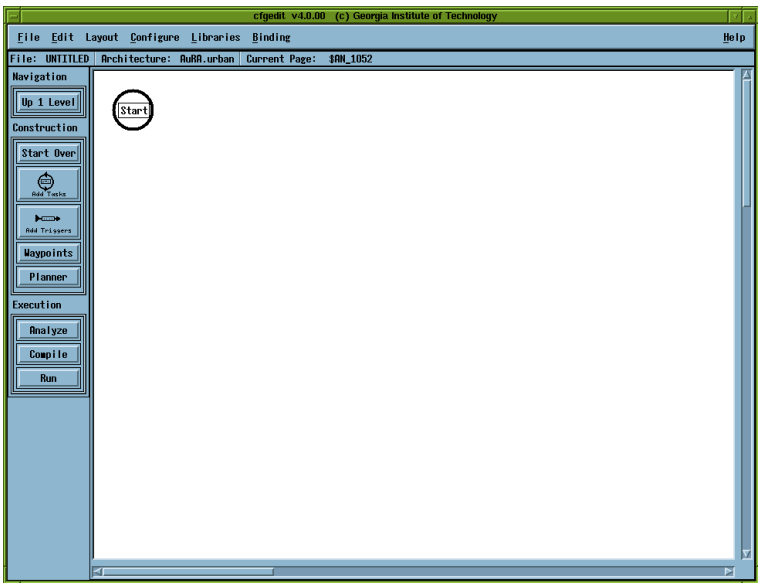

Figure 6: *CfgEdit* - the FSA diagram

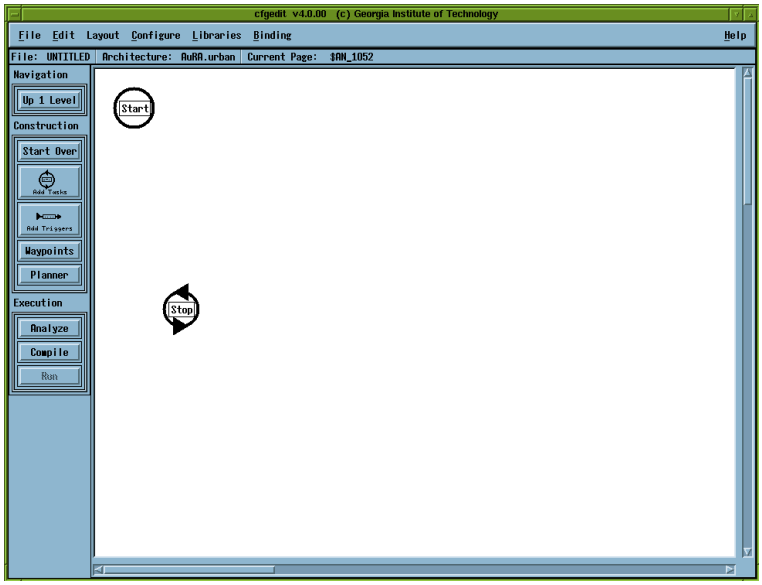

Figure 7: *CfgEdit* - adding a new state

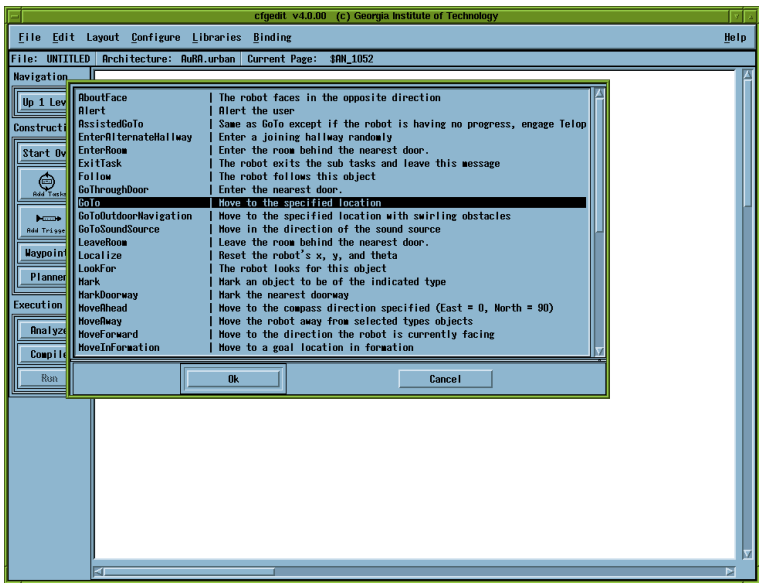

Figure 8: *CfgEdit* - modifying the state

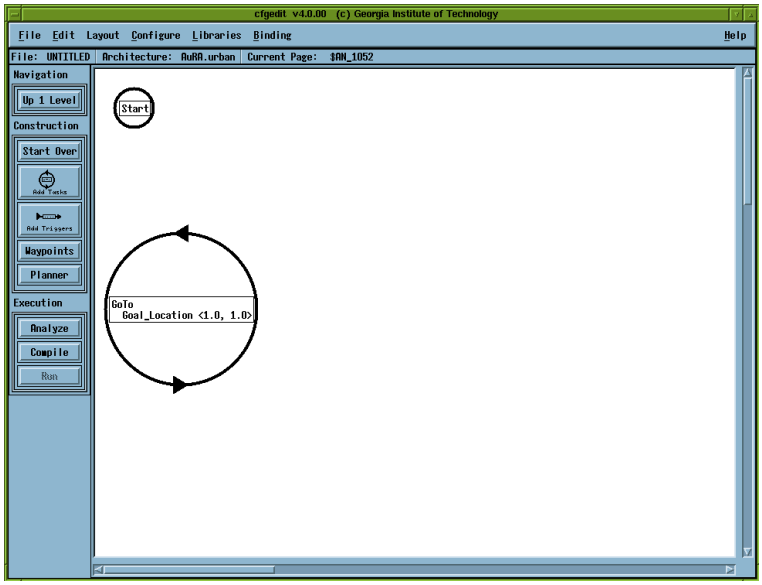

Figure 9: *CfgEdit* - the "GoTo" state added

Figure 10: *CfgEdit* - specifying a goal location

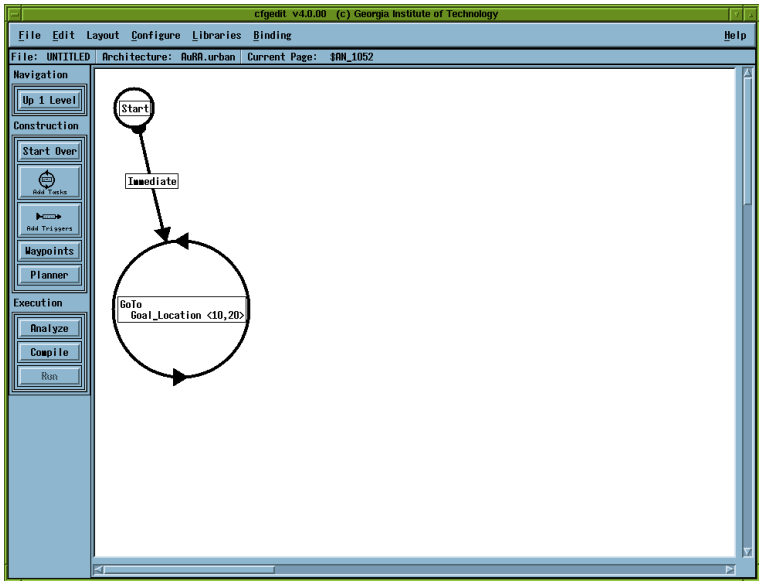

Figure 11: *CfgEdit* - a trigger added

to modify this trigger, you can right-click on it to see the rest of the triggers that are available (Figure 12). If you want to modify the parameters for the trigger, you can middle-click on it like you did for the state (Figure 13).

- By adding one more trigger from the second "GoTo" state to the first one with the at-goal location to be $\langle 30, 20 \rangle$, you have completed creating a back_and_forth robot (Figure 14).

6. **Save the Back_and_Forth Robot Configuration**

   - You can save this configuration for its future use by selecting "Save Configuration As" from the "File" menu on top of the window.

7. **Compiling the Robot Executable**

   - After creating the configuration for the back_and_forth robot, you can now create a robot executable by left-clicking the "Compile" button in the left menu bar.
   - You will see a pop-up window (Figure 15) showing compilation progress.
   - Left-click OK when the compilation is finished.

8. **Running the Back_and_Forth Robot**

   - Finally, you can run this robot you just created. Left-click the "Run" button in the left menu bar, and select "Simulated robot" (default) and left-click the Run button (Figure 16).
   - If the *mlab* console shows a robot going back and forth between two points, like the one in Figure 17, congratulations, you have successfully created the robot executable using *CfgEdit*!

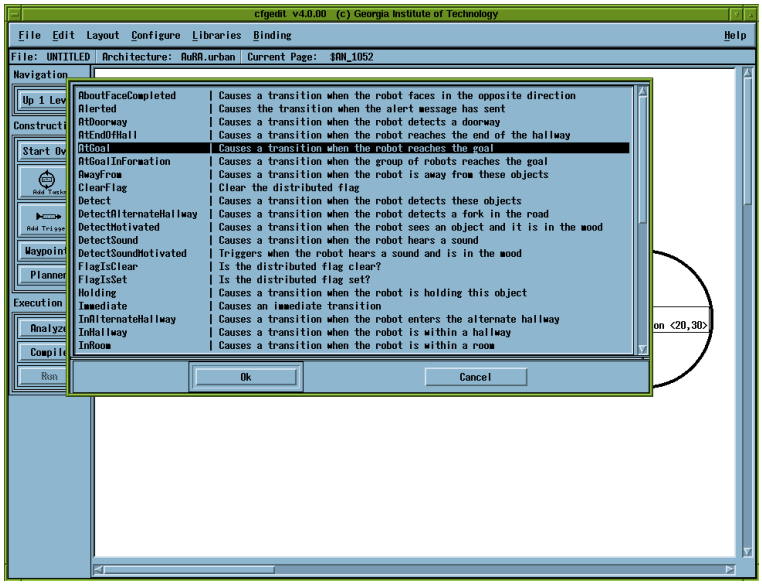

Figure 12: *CfgEdit* - a list of triggers can been seen by right-clicking on one of the triggers you created.

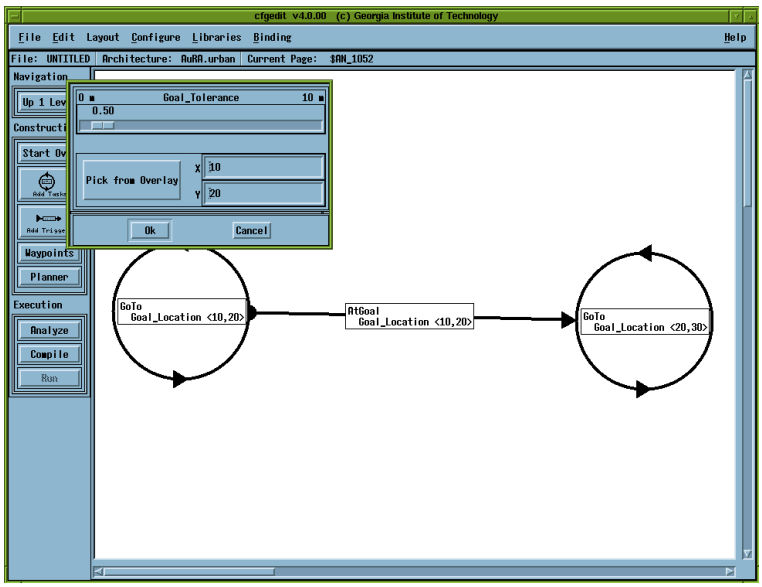

Figure 13: *CfgEdit* - the parameters for a trigger can be modified by middle-clicking on it the trigger.

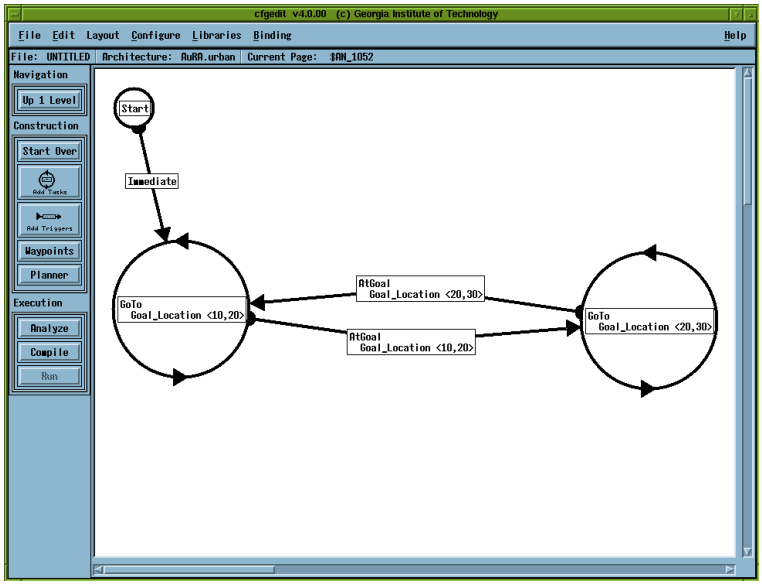

Figure 14: *CfgEdit* - the back_and_forth robot configuration

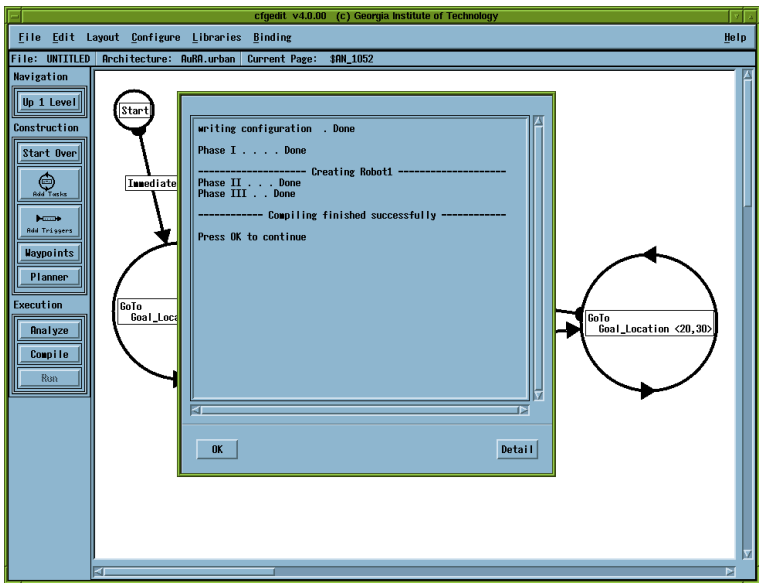

Figure 15: *CfgEdit* - compilation

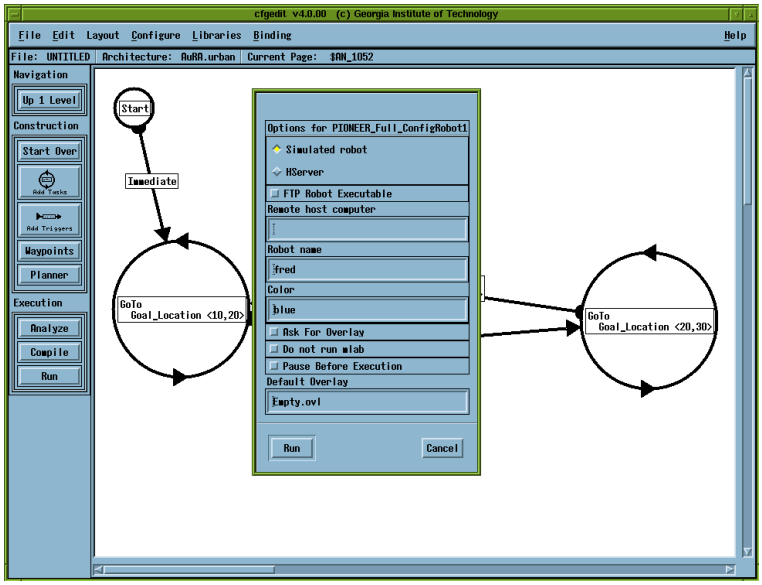

Figure 16: *CfgEdit* - running *mlab*

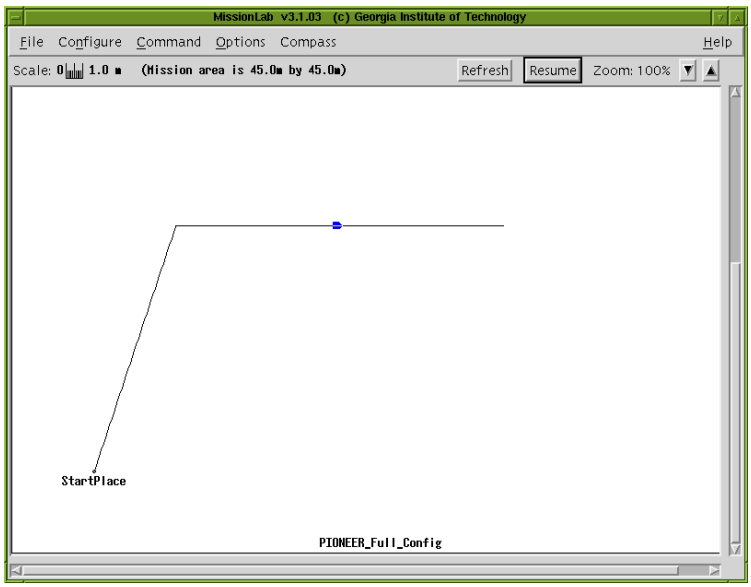

Figure 17: *mlab* - running the back_and_forth robot

3 The *MissionLab* Tools

3.1 Running *MissionLab*

When you ran the quick demo program in the previous section, you ran a script called "demo" in the directory to invoke *mlab* and other necessary programs to run *MissionLab*. However, to be able to utilize *MissionLab* functions, you need to be able to run *MissionLab* manually. Take the following steps to run *MissionLab*:

1. First, the communications server, IPT or `iptserver`, must be operating. If `iptserver` is not already running on an accessible computer, run the version supplied with the *MissionLab* package in the background. You should be able to find `iptserver` in [*your MissionLab home*]/bin directory where you should already have the execution path pointing to:

   ```
   % iptserver &
   ```

   If you see an error like "`IPT: Failure to create module listen socket.`", most likely, it means that `iptserver` is already running on the machine. You can safely ignore the error.

   It might be advantageous to run `iptserver` in a separate window since it generates output which does not usually need to be monitored. If an `iptserver` process is already running, note the host that it is running on. If it is the host on which *MissionLab* is to be run, no further preparation is necessary. If not, there are two ways to inform *MissionLab* where to locate the server. The first is via an environment variable, IPTHOST. Suppose the communication server is running on host "cartman.cc.gatech.edu". The following command will set the necessary environment variable:

   ```
   % setenv IPTHOST cartman.cc.gatech.edu
   ```

   It may not be necessary to spell out the complete internet name of the host in this command. The second way to specify the communications server host is via a command line argument, which is explained later.

2. *MissionLab* is now ready to be run. Move to the appropriate directory and bring up the user interface console by running *mlab*:

   ```
   % mlab
   ```

   This should start the *MissionLab* program. When the *MissionLab* program is run, the user interface for displaying the scenario and controlling its operation pops up (Figure 18). This user interface console is called *mlab*. See Section 3.2 for details on how to operate *mlab*.

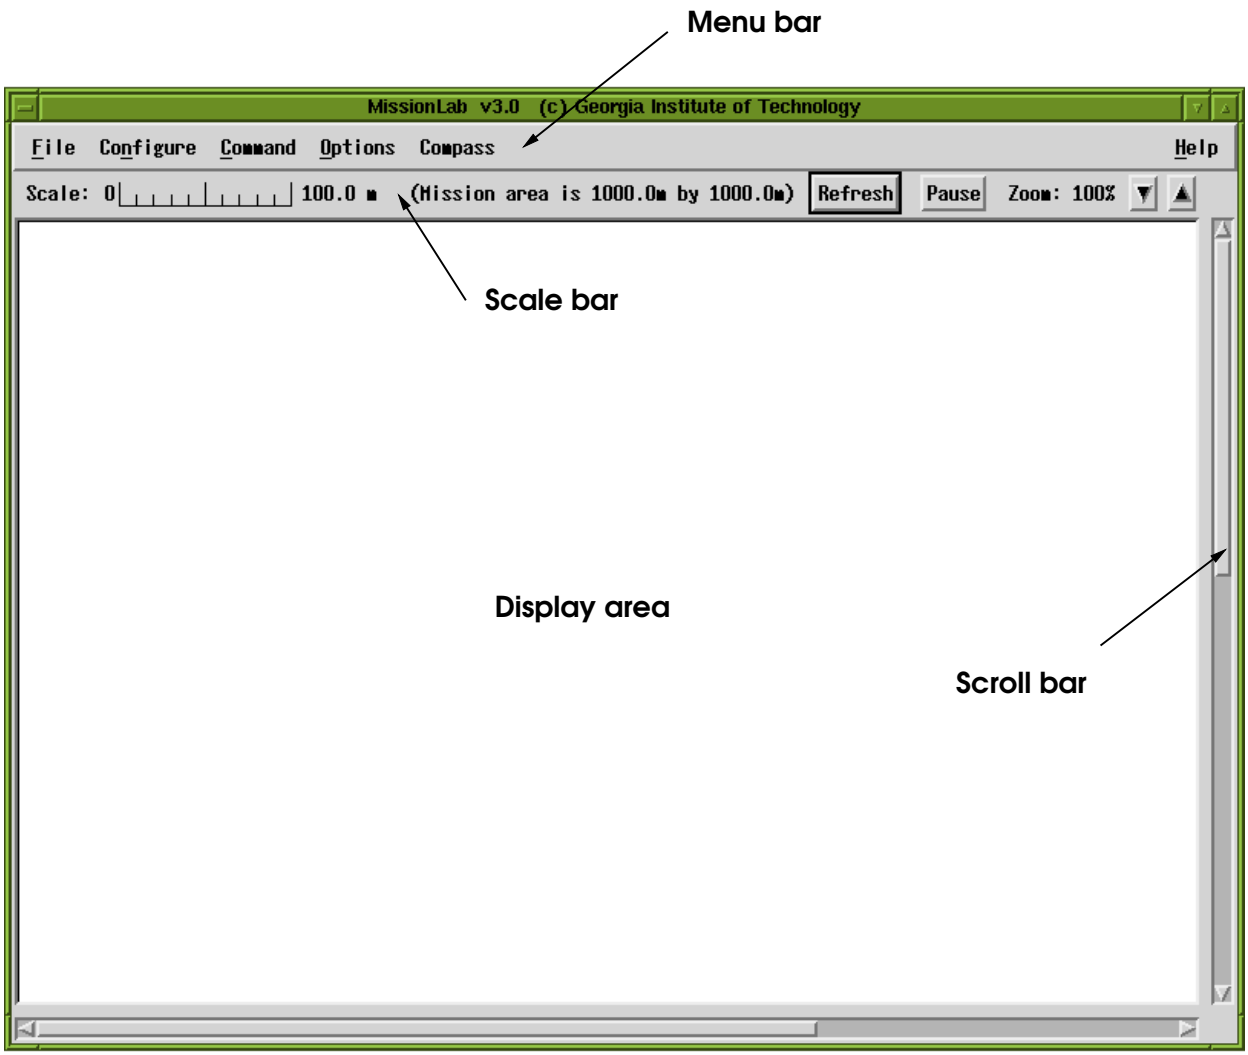

Figure 18: *mlab* - *MissionLab* User Interface Console

3.2 *mlab* (User Interface Console)

When the *MissionLab* program is run, the user interface for displaying the scenario and controlling its operation pops up (Figure 18). This user interface console is called *mlab*, and it consists of the following four components:

- **Menu bar**: The menu bar contains the menus for "File", "Configure", "Command", "Options", and "Compass".
- **Scale bar**: The scale bar is underneath the menu bar. It shows the scale by displaying a length legend. It also has a display of the current value of the zoom factor, the percent the display is scaled up from its nominal size. On the right of the zoom factor value are two buttons: (Zoom out) and (Zoom in) which can be used to zoom the map display area out and in. For example, when the display area is filled with detected obstacles, you can press `Refresh` to clear them all. The `Pause` button will allow you to stop the movement of a robot for both simulation and real-robot cases.
- **Display area**: The largest part of the user interface is the display area in its center. The operational area is shown in this area.
- **Scroll bars**: On the lower right and bottom edges of the user interface are the scroll bars for scrolling around the display area.

In this section, the usage of *mlab* is explained.

3.2.1 *mlab* Command Line Arguments

mlab can take several optional arguments. The full form of the form is:

`mlab` [*X-opts*] `[-CcdhLRrSX3] [-p` *psnfile*`] [-s` *seed*`] [-H` *height*`] [-I` *hostname*`] [-W` *width*`]` [*filename* | `-m` *msgfile* | `-w` *wayptfile*`] [-n]`

All of the arguments are optional. The main argument, *filename*, is the name of a command description (CMDL) file to load as part of the startup process. The other options do the following:

X-opts Various X-Windows options can be specified (such as `-geometry`). See the documentation for X for details (`man X`).

`-C` Forces a color map to be displayed.

`-c` Tells *MissionLab* to expose the command panel after starting. Note that this may not work properly in some cases with some window managers. If the window comes up highly compressed, restart *mlab* without this option and access the command panel using the menus.

`-d` Turns on the debugging mode. This option generates extensive diagnostic printouts which are probably not very helpful to anyone but the developers.

`-H` *height* Allows the user to specify the height (in pixels) of the scrollable map display area. The default is 1000, but it may desirable to change this in some situations. For instance, if your system runs out of memory allocating the pixmap for the scrollable map area, you may want to specify smaller values for the width and height using the `-H` and `-W` options.

`-h` Print out a help message explaining the command line options for *MissionLab*.

`-I` *hostname* Allows the user to tell *MissionLab* the name of the host on which IPT is running (*hostname*). This supersedes any hostname specified through the environment variable IPTHOST.

`-L` Turns on the robot data logging mode.

`-m` *msgfile* Writes a point-and-click coordinate into *msgfile*.

`-n` Forces *MissionLab* not to pop-up the copyright message upon starting execution.

`-p` *psnfile* Tells *MissionLab* to use the file *psnfile* for setting up the Personality window.

`-R` Asks for an overlay file and then runs the mission with the overlay.

`-r` Tells *MissionLab* to automatically run the command file after starting.

`-S` Turns on the report current state mode.

`-s` *seed* Specifies a seed (an integer number) with which to start the random number generator used by the program.

`-W` *width* Allows the user to specify the width (in pixels) of the scrollable map display area. The default is 1000, but it may desirable to change this in some situations. For instance, if your system runs out of memory allocating the pixmap for the scrollable map area, you may want to specify smaller values for the width and height using the `-H` and `-W` options.

`-w` *wayptfile* Writes a multiple point-and-click coordinate into *wayptfile*.

`-X` Print the X fallback resources for MissionLab and quit.

`-3` Enable the 3D mode[1]. 3D views of the layout will be shown. They are top view, side view and front view. The robot in the views is shown as a six-legged robot. Other objects in the views are shown as squares instead of circles as in the 2D view. The 3D views are updated on every fifth 2D view update, so the display will not slow down the simulation dramatically. Refer to Section 3.2.19 for more details.

3.2.2 X-Motif Resources for *mlab*

MissionLab operates best on color monitors but should work adequately on monochrome monitors. *mlab* uses the X-Motif widget set but should run under any X-based window manager. The defaults for various X-Motif related display characteristics can be overridden by the user by adding resource statements to their X11 `.Xdefaults` file. For instance, the following resource statement may be useful:

```
MissionLab*background: LightSkyBlue3
```

This directive causes all the backgrounds in *MissionLab* to be displayed using the "LightSkyBlue3" color. The size of the main display window can be changed by using the following geometry directive:

```
MissionLab.geometry: 850x600+10+200
```

(This same directive could have been given on the command line also using the `-geometry` option. Note that this directive does not affect the size of the scrollable map area.) To change the characteristics of the command interface panel, use the resource `MissionLab*Command Interface.*`. For the obstacle creation dialog box, use `MissionLab*Obstacle Creation.*`. For the world scale dialog box, use `MissionLab*World Scale.*`. For the time scale dialog box, use `MissionLab*Time Scale.*`. For a few other resource names, run `mlab` using the `-X` option to see the fallback resources.

(a) File menu (b) Configure menu

Figure 19: The file and configure menus

3.2.3 File Utilities

As shown in Figure 19, the "File" menu has four entries. The first entry, "Open Mission", invokes a file dialog box which can be used to locate and load command description files (CMDL). The details of CMDL are described in Section 3.7. You can also use a shortcut key Ctr-o to invoke this function. The second entry, "Load Overlay", is for viewing an overlay file (ODL). ODL is used to describe a mission area of robots you are going to experiment with. The details of ODL are explained in Section 3.8. The third entry, "Restart" rewinds a mission when it is finished, and runs it again. When you want to kill the *MissionLab* process, you can choose "Quit" from this menu.

3.2.4 Obstacle Creation Dialog Box

The first entry of the Configure menu (Figure 19) is Obstacles, and it invokes the obstacle creation dialog box (Figure 20). This dialog box allows the user to populate the world with obstacles. Thus, when you are using *MissionLab* for simulating and experimenting, for example with an obstacle avoidance behavior, you might find this function to be useful.

The parts of the dialog box are as follows: The three button, Ok, Apply, and Cancel, along the bottom have typical meanings. An additional button, Clear Obstacles, allows the operator to delete all the obstacles. When the parameters are satisfactory, press the Ok button or the Apply button to generate a new field of obstacles. The Ok button hides the dialog box while the Apply button leaves it up for further operations. The Cancel button hides the dialog box without generating a new set of obstacles. The top scale (Obstacle Coverage) controls what percent of the area is to be covered by obstacles. Note that obstacles generated by this dialog box will not overlap. The second and third scales from the top control the minimum and maximum size of the obstacles (in meters). The text field labeled "Seed:" is the current value of the seed for the random number generator. The user can enter a value into that field and tell the system to accept it by pressing the Accept button or by pressing RETURN-key with the focus in the seed text field. The user can have the system generate a new random seed by pressing the Generate new seed button. The user can also choose to have the software generate a new seed every time the Apply button is pressed by turning on the "Auto Randomize" toggle button.

[1] This function is not supported by *MissionLab* version 4.0.

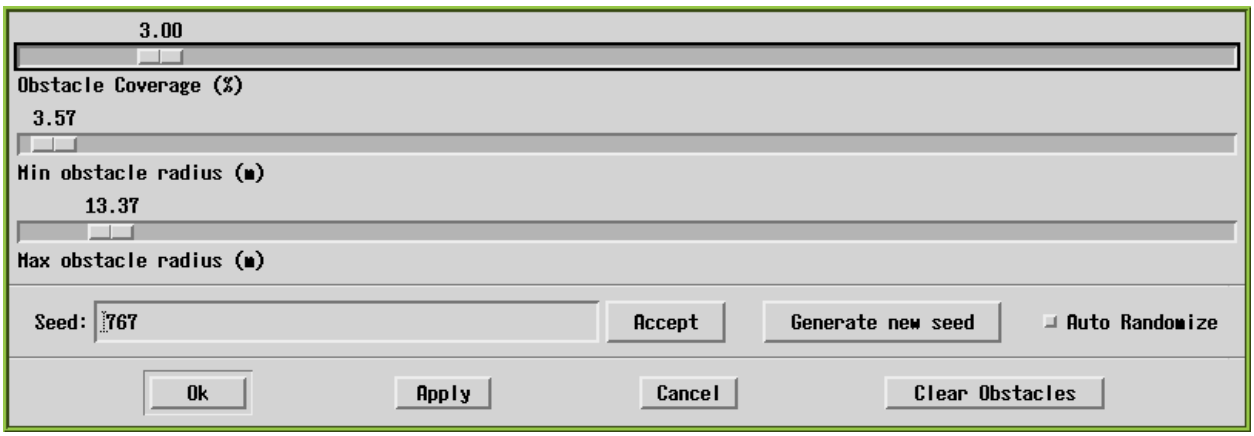

Figure 20: The obstacle creation dialog box

3.2.5 World Scale Dialog Box

The second entry of the Configure menu is Scale, which invokes the world scale dialog box (Figure 21). The world scale dialog box allows the user to alter the scale of the display of the world. The Ok, Apply, and Cancel buttons have their typical meanings. The scale at the top controls the zoom factor used to display the map area. This value is also controlled by the ▲ (zoom in) and ▼ (zoom out) buttons just below the right end of the menu bar. The "Scale Robots" toggle controls whether the size of the displayed robots is to be scaled with the world. If it is on, the robots are shown as being as long (in meters) as the "Robot Length" scale on the right indicates. If it is off, the robots are shown at a fixed size (regardless of the zoom factor); specifically, the robots are shown as being as long (in pixels) as the "Robot Length" scale on the right indicates.

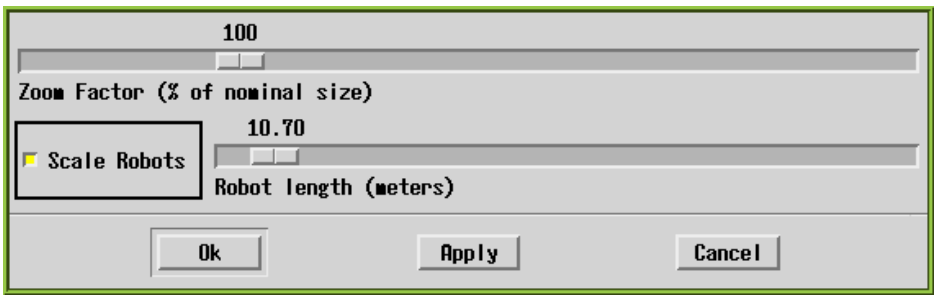

Figure 21: The world scale dialog box

3.2.6 Time Scale Dialog Box

The time scale dialog box (Figure 22) can be invoked by the third entry of the Configure menu, Time. The time scale dialog box allows the user to alter the speed at which the simulation executes. The scale of the duration of each robot sense/compute/act cycle, in seconds can be adjusted using the slider bar. Note that this controls the simulated time taken per step, not the actual CPU time required to execute it.

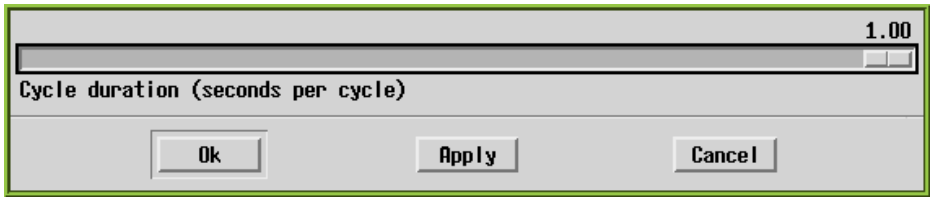

Figure 22: The time scale dialog box

3.2.7 Command Interface Panel

The first entry of the Command menu (Figure 23) is Command Interface, and it is used to bring up the command interface panel, shown in Figure 24.

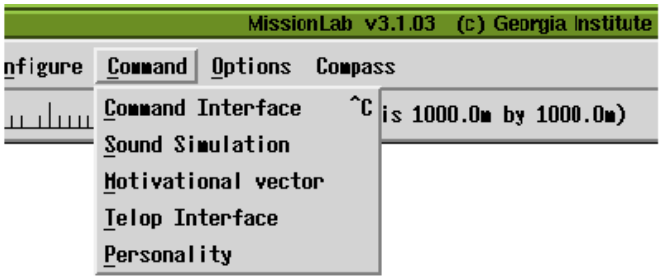

Figure 23: The command menu

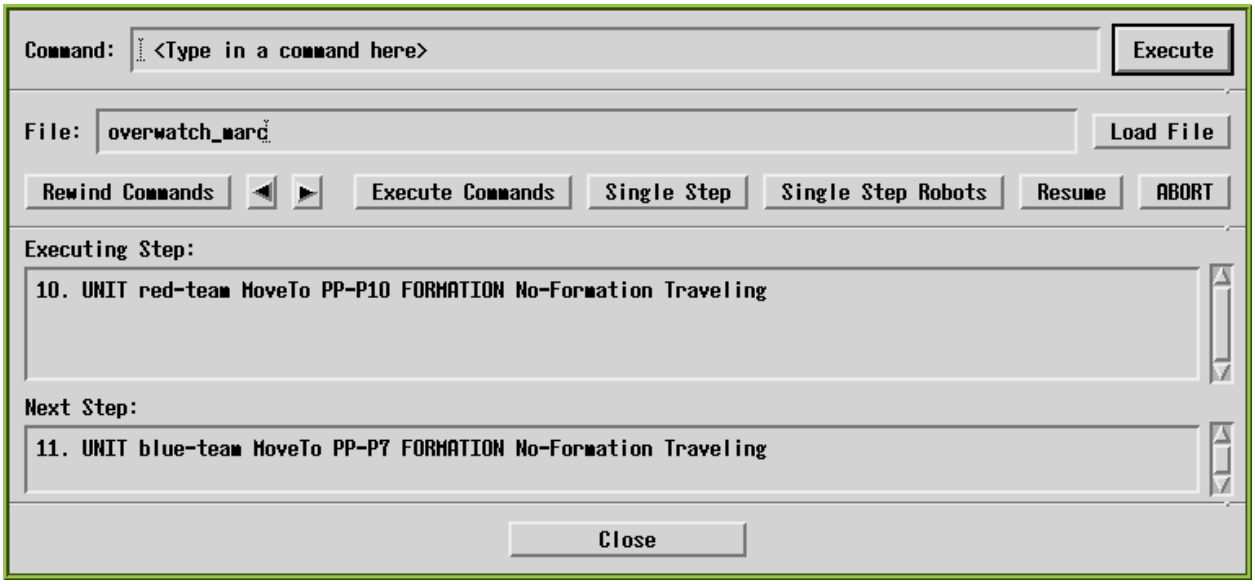

Figure 24: Command Interface

The command interface panel can be hidden at any time by pressing the Close button on the bottom

of the panel. The top area of the command interface panel is a text field labeled "Command:" in which the user can enter commands manually. The command can be executed by pressing the Execute button on the right side of the text field or by pressing RETURN while the focus is in the text field. The second area from the top is the command list execution area. It has has a text field labeled "File:" in which the user can enter names for command files to load. The file is loaded when the Load File button on the right is pressed or when the RETURN key is pressed while the focus is in the "File:" text field. The functions of the buttons in the lower part of this area are explained below.

The third area from the top is the command display area. The top part of it is where executing steps are displayed. The lower part shows the next command to be executed. If the set of commands in the step display is larger than the display window, the user can browse through it using the scroll bars on the right.

The control buttons in the bottom part of the command list execution area have the following functions: If the Execute Commands button is pressed, the list of commands is automatically executed. This is the primary mode of operation. A secondary mode of operation is to single step through the list of commands using the Single Step buttons. The rest of the buttons have the following functions:

Rewind Commands — Rewind the list of commands. This cannot be invoked if commands are executing automatically.

◁ — Move backwards through the list of steps. If commands are executing automatically, the command list backs up and the new command is executed. If the commands are not executing automatically and a single step is executing, the command list backs up but the new command is not executed. If no commands are executing, the command list backs up without executing the new command.

▷ — Similar to ◁, except that the command list is moved forward.

Execute Commands — Execute the list of commands automatically, starting with the command shown in the "Next Step:" display window. Note that the first command is usually a "START" start command. It is an error to start with other commands, such as "MOVETO" without starting the robots first.

Single Step — Execute the next command in the command list. (If commands are executing automatically, this is similar to the ▷ button.)

Single Step Robots — When the robots are paused, they can be single-stepped by using this button. Each press of this button causes the robots to go through one sense-move cycle.

Pause — Pause the motion of the robots. The button then changes to Resume. Press it again to let the robots resume their motion.

ABORT — Abort the execution of the current list of commands, delete the robots, and rewind the command list.

3.2.8 Sound Simulation

MissionLab has the capability to simulate sound sources. The interface to simulate sound sources can be invoked from the Command menu and is called "Sound Simulation." It appears similar to the telop interface (Section 3.2.10). To simulate a sound, the user is required to click inside the white disk labeled Sound_Source (Figure 25). After the click, a line is drawn connecting the center of the disk with the click location. The direction of this line corresponds to the direction of the sound source and its length corresponds to the sound volume.

This interface generates a continuous and sustained sound (in simulation). To stop the sound, the user should middle click inside the white circle, or left click again to specify a different sound (direction and volume). To quit the sound simulation click the `End SoundSim` button.

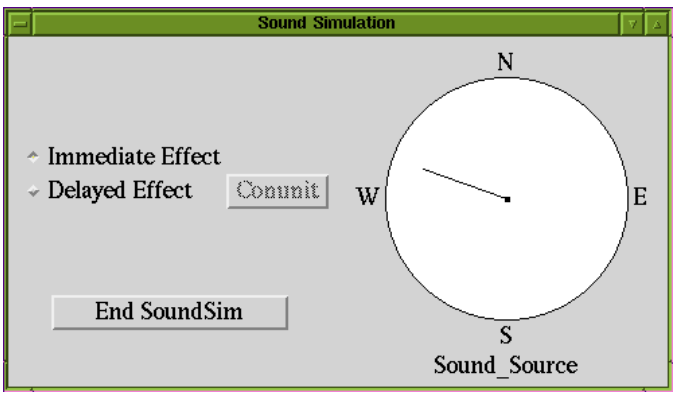

Figure 25: Sound Simulation Window

In addition to simulated sound, *Missionlab* can also detect real sound when the program is run on a real robot and not in simulation. The sound detection is provided by a specialized DSP board which is connected to one of the serial lines of the computer/laptop that runs the robot executable code. A program called "sserver" is spawned as a child process when the robot executable is started. This program is a server which provides the latest sound source data upon request. The code for sserver is in [*your MissionLab home*]/src/hardware_drivers/sound/ and can be customized for different sound detection hardware.

3.2.9 Motivational Vector Window

To provide a variety of behaviors, *MissionLab* was augmented with motivational variables. These variables correspond to internal states of the robot and can be used to simulate motivations and/or emotions. These variables are kept in a database and their values can be updated by different states and triggers or they can be directly changed by the user through the use of the motivational vector interface (Figure 26). This interface can be invoked from the `Command` menu. Please note that this is similar to the Personality Interface (Section 3.2.11) but implemented differently. For example, this interface can only apply to the *CfgEdit*-type robot while the personality function is only implemented in the manually-coded-type-robot. (See Section 3.3 which explains the difference between these two types of robots.) The behaviors that utilize this motivational variables are listed in Section 3.4.4.

3.2.10 *Telop* Interface

In some cases, you may want to drive a robot using a joystick to influence the direction in which the robot moves. Some robots you create with *CfgEdit* or a generic robot executable that come with the *MissionLab* package are implemented with *Telop* capability, which allow users to maneuver robots with a joystick-like interface (Figure 27). The Teleautonomous Operation (*Telop*) interface can be invoked by choosing the fourth entry (`Telop Interface`) of `Command` menu.

The *Telop* interface is divided into two sections. On the right is an on-screen "joystick", which appears as a white circle with a dot in the center. The joystick is the input mechanism for the basic teleautonomy behavior. To depress the joystick in a particular direction, move the mouse pointer to a position in the joystick and click the left mouse button. A line is drawn from the center of the joystick to the position clicked to indicate the direction and amount that the joystick is depressed. Notice in the figure that a line is drawn to the northeast. This commands the robots to move towards the northeast. The joystick remains

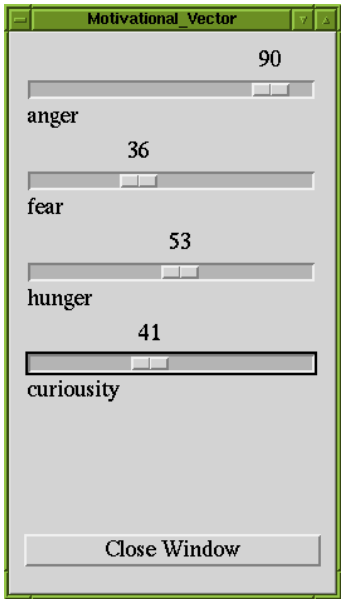

Figure 26: Motivational Vector Window

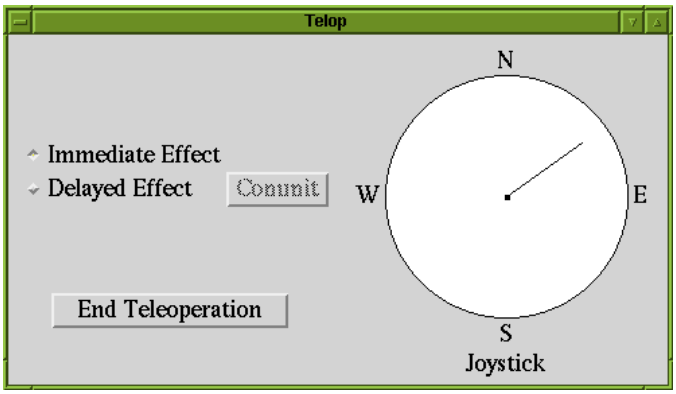

Figure 27: *Telop* Interface

depressed until the user clicks in the joystick with the middle mouse button, and then the joystick will return to the neutral position.

On the left are controls that affect the use of the *Telop* interface. The Immediate Effect and Delayed Effect toggle buttons control when an input to the joystick is seen by the robots. In Immediate Effect mode, any input is seen by the robots immediately. In Delayed Effect mode, the robots do not act on inputs until the `Commit` button is pressed. The `End Teleoperation` button releases the joystick and hides the *Telop* interface.

Note that there are two ways that the *Telop* interface can be used. First, if a command list is executing, the *Telop* interface can be popped up at any time (via the menus) to override or direct the motion of all the robots. Second, if the user actually embeds a `TELEOPERATE` command in the list of commands, then the *Telop* interface will pop up automatically and will only control the specified unit. See the `TELEOPERATE` command on page 73 for details of the command syntax involved.

3.2.11 Personality Window

The last entry in the `Command` menu is `Personality`, which invokes the personality window (Figure 28). The personality window allows the user to interactively modify the behavioral parameters values of the robots[2] in terms of the individual parameters or more abstract groupings such as personality traits.

Figure 28: Personality Window

This personality window contains two slider-bars that affect the aggressiveness and wanderlust of the robots. Moving the slider-bar to the right increases the trait, while moving the slider-bar to the left decreases the trait. Increasing the aggressiveness increases the robots' desire to reach their goal location while decreasing the desire of robots to avoid obstacles. Increasing the wanderlust increases the amount of noise in the robots' movements while decreasing their desire to stay in formation.

The user can specify his own set of personality traits by creating a personality file and specifying it on the command line with the `-p` option. The format of the personality file is a single line that indicates the number of personality sliders followed by groups of information for each personality. The group for each personality contains a title for the slider-bar, as well as information regarding each of the behavioral parameters that the slider-bar effects. The title must be a single word. Each behavioral parameter is specified by the key for the behavioral parameter (as it appears in the robots' databases), a base value for the parameter, and an indication of whether the parameter is to be incremented or decremented when the personality trait is increased.

It is easiest to explain the format of the personality file by examining an example file. The personality file for the default personality window is presented here:

```
Number of sliders: 2

title: Aggressiveness
num_params: 2
key: navigation_move_to_goal_gain
base: 0.8
inc: 1
key: navigation_avoid_obstacle_gain
base: 1.5
inc: 0

title: Wanderlust
num_params: 2
key: navigation_noise_gain
base: 0.1
```

[2] Currently, the personality function is only implemented in the manually-coded-type-robots (*robot*, *tmr_robot-1998*), which are explained in Section 3.3. Thus, it does not apply for the *CfgEdit*-type robot.

```
inc: 1
key: navigation_formation_gain
base: 1.0
inc: 0
```

The first entry indicates that there are two personality traits in the window. Then for each personality trait, there is a group of lines. The first group is for the aggressiveness trait. The `title:` line indicates that the personality trait is to be labeled Aggressiveness. The `num_params:` line indicates that this is a grouping of two parameters. Each of these parameters is then specified by a `key:`, `base:`, and `inc:` line. The `key:` line indicates that the first of the two behavioral parameters affected by this slider-bar is identified in the robots' database by the key `navigation_move_to_goal_gain`. The `base:` line indicates that the base value for this behavioral parameter is 0.8. Each parameter can be adjusted in the range from 0 to two times the base value. When the personality slider is at the 50% value, then the behavioral parameter will be at the base value. The `inc:` line indicates that the first behavioral parameter will be increased as the personality trait is increased. The value of 1 in this line indicates that the behavioral parameter will be set at 0 when the slider-bar is at the 0% value and twice the base value when the slider-bar is at the 100% value. A value of 0 in this line would indicate that the parameter would be decreased as the value of the personality trait is increased, thereby taking a value of twice the base value when the slider-bar is at the 0% value and 0 when the slider-bar is at the 100% value. Similarly, the `key:`, `base:`, `inc:` lines indicate that the second of the two behavioral parameters controlled by this slider-bar has a key value of `navigation_avoid_obstacle_gain`, a base value of 1.5, and should be decreased as the personality trait is increased. The next group of lines gives similar information for the wanderlust personality trait.

3.2.12 Robot Trails

There are a few miscellaneous options you can toggle from the `Options` menu (Figure 29). The first one, "Show robot Trails", can make robots leave a black trail on the screen as they move. It is useful when you want to trace the points the robots go through. A shortcut key `Ctrl-t` or specifying "set show-trails on" in a CMDL file will turn on/off this option.

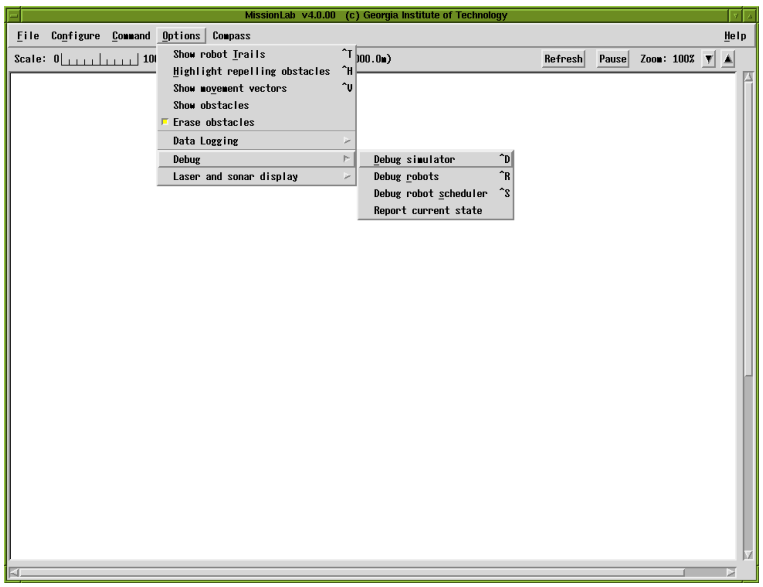

Figure 29: The options and debug menu

3.2.13 Obstacle Highlighting

The second entry, "Highlight repelling obstacles", in the `Options` menu will turn on/off the option for users to tell whether the robots are in the zone of influence and safety zone for each obstacle. The zone of influence is the area where robots react with the obstacles, and a blue circle will show up when the "Highlight repelling obstacles" option is on. If the robots are in the safety zone, inter-robot collisions are assumed to occur, and it will be indicated with a red circle. You can turn on this option with a shortcut key `Ctrl-h` or specifying "set highlight-repelling-obstacles on" in a CMDL file.

3.2.14 Movement Vector

You can observe a heading direction of each robot by turning on the option "Show movement vector" in `Options` menu. The heading direction will be displayed as a red arrow on each robot in the screen. The shortcut key is `Ctrl-v` and the CMDL file can take "set show-movement-vectors on" command also.

3.2.15 Sensor Readings Display

If you are running a mission on a real robot, you might want to turn on "Show obstacles" in the `Options` menu, which allows *mlab* to display objects that are perceived by the robot sensors. If the *mlab* screen is filled with the objects, and if you wish to erase them, you can click on the `Refresh` button on the scale bar manually whenever you want to erase them, or turn on the "Erase obstacles" option in the `Options` menu to automatically erase them after a specified period.

You can also change the shape of the sensor readings by selecting options from "Laser and sonar display" (Figure 30). The followings are the alternative shapes supported by the option:

- "Laser Display Normal": The laser readings are transformed into the world coordinate and will be displayed around the robot display.
- "Laser Display Linear": The raw laser readings will be displayed as a graph (X-axis = laser number from 0 to 361, Y-axis = distance from perceived objects) at the lower left corner of the *mlab* screen.
- "Laser Show connected": The laser readings will be displayed as a line instead of individual points.
- "Show sonar as arc": The sonar readings will be display as an arc instead of a point.
- "Show sonar as point": The sonar readings will be display as a point.

3.2.16 Data Logging

Upon the real-time execution of the robot, for both simulated and physical robots, you can record the position, velocity, heading, and the current state of the robot with respect to time if the data logging function is invoked. This function can be turned on by both from this "Data Logging" menu and from the *mlab* command option "-L".

An output file <*robot executable name*>.log. will be then generated by *mlab*. An example of the output file is shown below.

```
MissionLab Robot Executable Status Data
```

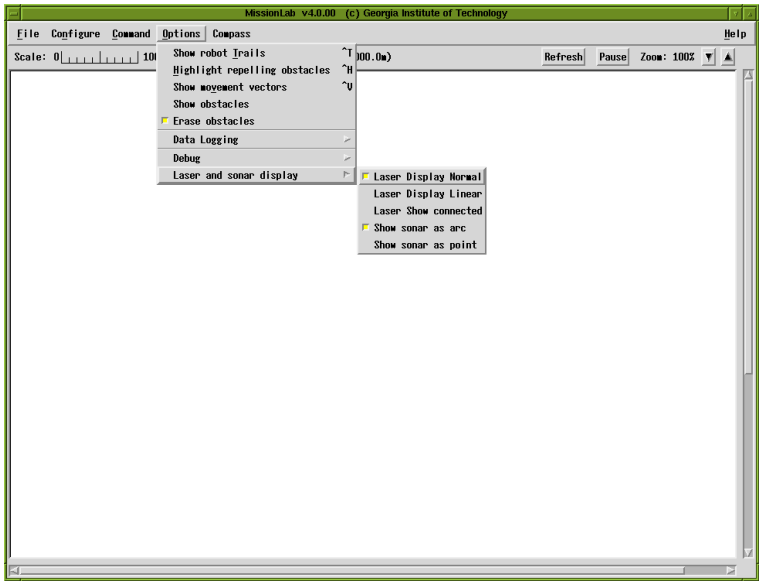

Figure 30: The options for the obstacle display

Time	Position-X	Position-Y	Heading	Velocity-x	Velocity-y	RobotID	State
0.000	39.400	17.300	0.000	0.000	0.000	1	0
0.345	39.400	17.300	0.000	0.000	0.000	1	1
0.513	39.400	17.300	0.000	0.000	0.000	1	2
0.517	39.400	17.300	0.000	-0.018	0.199	1	2
0.522	39.382	17.499	95.059	0.195	0.044	1	2
0.527	39.321	17.690	107.766	0.189	0.065	1	2
0.532	39.201	17.850	126.840	0.181	0.086	1	2
0.537	39.024	17.943	152.299	0.199	0.021	1	2
0.543	38.839	18.017	158.219	0.197	0.035	1	2
0.569	38.643	18.057	168.417	0.197	0.035	1	3

3.2.17 Debug Options

Turning on the debug option in `Options` menu will dump a huge amount of information of what *MissionLab* is doing. In most of the cases, it will print out all the `printf` statements specified as "`if (debug)`" in the *MissionLab* source code to the console where you launched *mlab*. For example, turning on "Debug simulator" (`Ctrl-d` or "set debug-simulator on" in the CMDL file) will provide the information about *mlab* while "Debug robots" (`Ctrl-r` or "set debug-robots on" in the CMDL file) will provide the information about the robot executables. If "Report current state" is turned on, *mlab* will pop-up the window (Figure 31) showing the state the robot is currently in. This "Report current state" window can be also invoked by adding "-S" to the *mlab* command option.

3.2.18 Compass Window

Figure 32 is the compass window which can be invoked by "Compass" menu in the menu bar. When a robot is running, an arrow will show up in the circle area indicating the heading direction of the robot with respect to the compass direction. This function works for both the simulation and the robot that supports a compass device. Press `End Compass` to close the window.

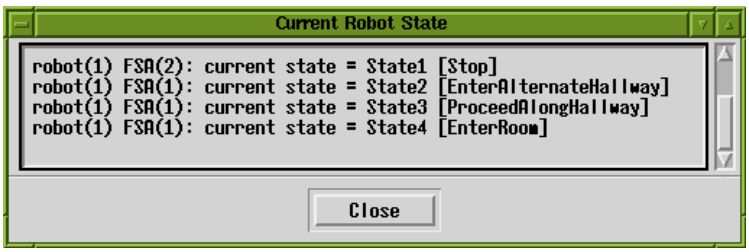

Figure 31: Report Current State Window

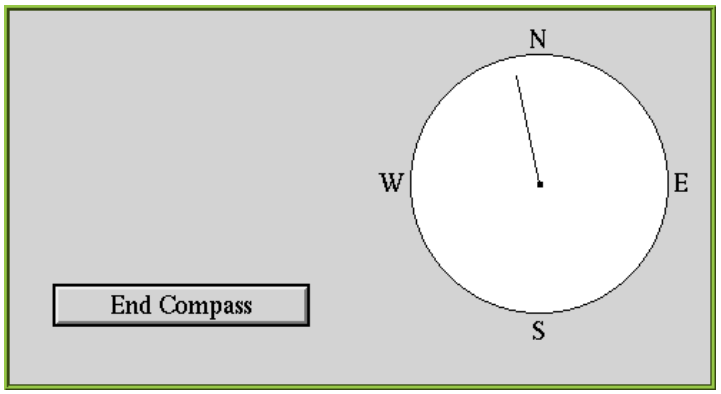

Figure 32: Compass Window

3.2.19 3D Display

Three dimensional views[3] can be invoked in *mlab* to give the user a more realistic representation of the mission scenario. The user enters the 3D mode by giving a `-3` option on the command line. 3D views of the layout include top view, side view and front view. The robot in the views is shown as a six-legged robot. Other objects in the views are shown as squares instead of circles as in the 2D view. The 3D views are updated on every fifth 2D view update, so the display will not slow down the simulation dramatically. A snapshot of the 3D views is shown in Figure .

The 3D views are generated using `sphigs` package. Since there is only polygon representation of objects in `sphigs`, and to simplify computation, all objects are shown as squares; the labels for the passage points are not shown to make the 3D views less crowded.

For the items listed in an overlay file, passage points, boundaries and objects are represented in the 3D views. All other items are not supported at this moment. The whole view is scaled at the x and y directions to make whole overlay area visible according to the `MISSION-AREA` definition in the overlay file. No modification is needed to the 2D overlay file.

Currently, all objects have the same height, and they are located on the same z plane. In the future, we will change the overlay definition to accommodate true 3D descriptions, including the height of the object and the location of the object in the z direction. Robot movement vectors will also be extended to 3D to enable the robot to navigate in a 3D world. Also, robot representation descriptions will be added to the overlay file to allow the user to define the shape of the robot.

[3] This function is not supported by *MissionLab* version 4.0.

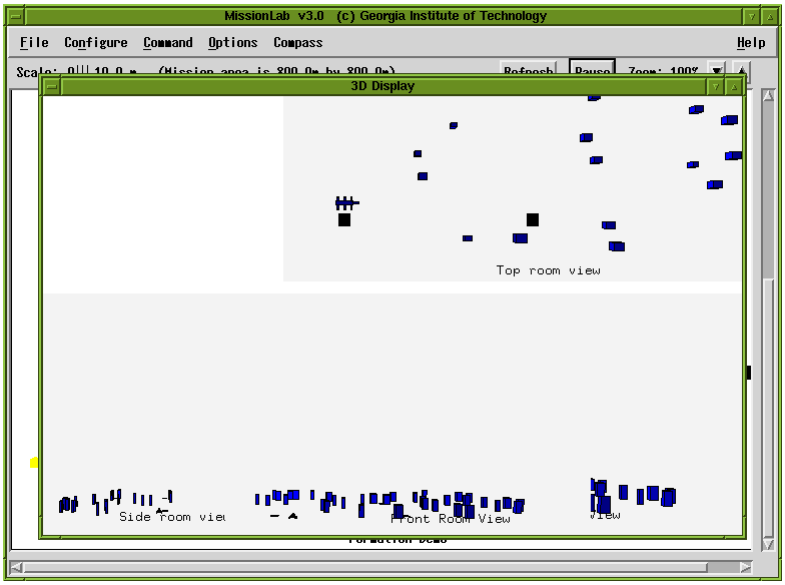

Figure 33: *mlab* - the 3D Display

3.2.20 Help Menu

The help menu, located on the right end of the menu bar, has two entries: About and Copyright that each invoke explanatory dialog boxes. The "About" dialog box gives information about the version of the program and the software creators. The "Copyright" dialog shows the full copyright agreement protecting this software.

3.3 Robot Executables

When you run *MissionLab* whether for simulation or real robots, *mlab* (Section 3.2) forks a program called "robot executable" for each robot. The robot executable contains two main libraries that are used to carry out a mission. The first library (*libcnl.a*) stores a set of the primitive behaviors, coded in the Configuration Network Language (CNL). These primitive behaviors are based on Motor Schema theory [2] and details are explained in [1]. The other library (*libhardware_drivers.a*) stores a set of functions that communicate with the *mlab* console and, if it is for the real robots, give commands to the robot hardware or to the low-level software embedded on the robot using Hardware Server or *HServer* (Section 3.9) . In this case, the robot executable serves as *HClient*, and talks to *HServer* using IPT (Section 4.1).

There are currently two methods to create the robot executable. The first method is through the Configuration Editor (*CfgEdit*). *CfgEdit* can create the robot executable with a graphical user interface. Thus, you do not have to do any coding. *PatrolCarRobot1* and *PedestrianRobot1* in the [*your MissionLab home*]/demos/tmr_demos are examples of this *CfgEdit*-type robot. Details on *CfgEdit* are explained in Section 3.4. The other method to create the robot executable is by programming in CNL manually. *robot* ([*your MissionLab home*]/src/robot/mlab-2.0-robot/robot) and *tmr_robot-1998* ([*your MissionLab home*]/src/robot/tmr_robot-1998/tmr_robot-1998) are examples of this manually-coded-type robot. The main difference between those two types is that the *CfgEdit*-type contains the entire mission of the robot in its program. In other words, a mission from the start-state to the final stop-state (or terminate-state) and their triggers that invoke the state transitions are all encoded in the executable file before it is executed. On the other hand, the manually-coded-type robot does not contain information about the entire mission. The state transitions of robots rely on commands described in a command description file (CMDL file) of *mlab*, or inputs from the *mlab* Command Interface. The manually-coded-type robot is implemented with a set of behaviors for moving to a specified location, and occupying a position. A group of these robots can use several formation behaviors, such as line formation, column formation, diamond formation, wedge formation, and no formation.

3.4 *CfgEdit* (Configuration Editor)

As you have observed with the demo program in Section 2.2.2, *Cfgedit*, or the Configuration Editor, is a graphical tool for building a mission with a set of robot behaviors. It can then translate the mission as source code and compile it to create a robot executable that can directly control a simulated or real robot.

3.4.1 Setting Up the Environment

The first thing to do in order to run *CfgEdit* is to modify the configuration file to suit to your environment. You can find the configuration file (.cfgeditrc) in [*your MissionLab home*]/src/cfgedit. The symbolic link is pointed to this file also from [*your MissionLab home*]/bin .

In the configuration file, you have to change all the paths stated as "/net/hr1/robot/mission" with your "MissionLab home" The following is a sample of the configuration file for *CfgEdit*, which is included in the *MissionLab* package:

```
# Make backup CDL files from the editor (true or false).
backup_files = false

# Show the values of the slider bars instead of the symbolic names
ShowSliderValues = True

# Hide the parameters for a state/trigger of FSA in detail for default. (true or false)
HideStateTriggerParameters = True

# Disable Path Planner. (true or false)
DisablePathPlanner = false

# Set the capabilities of the user.
#   Need Execute in order to run a configuration
#   Need Modify in order to be able to modify parameters in a configuration
#   Need Edit in order to be able to create or modify configurations
#   Need Create in order to be able to create new components
#   Need Library in order to be able to modify library components
#   Need RealRobots in order to be able to run real robots
#
user_privileges = Execute, Modify, Edit, Create, Library, RealRobots

# Select which primitives are shown to the user
# List architectures here to restrict names to only those names occurring
# in all of the listed architectures.  The default is to show all names.
# Architectures:
#    AuRA
#    AuRA.urban
#    UGV
#
restrict_names = AuRA.urban

# List of comma separated directories and root names of the
# CDL description libraries to load.
# Will try to load xxx.gen, xxx.AuRA, and xxx.UGV
CDL_libraries = /net/hr1/robot/mission/lib/default,
                /net/hr1/robot/mission/lib/agents


# Optional: Configuration to load as the empty config.
```

```
#DefaultConfiguration = /net/hr1/robot/mission/lib/FSA.cdl
DefaultConfiguration = /net/hr1/robot/mission/lib/PIONEER_Full_Config.cdl

# Where to find the map overlays
MapOverlays = .

# Default Overlay
DefaultOverlay = Empty.ovl

# Default remote host
#DefaultHost = cortez.cc.gatech.edu

# Directory of the remote machine where the robot executable should be
# FTP-ed to, and executed from. (Note: It only affects if you specified
# a machine name in the "Remote host computer" field of the run dialog.)
RemoteHostRobotDir = /home/demo

# The user name for executing the robot executable on a remote machine.
# If it is commented, the name of the user who are running mlab will
# be used. (Note: It only affects if you specified a machine name in
# the "Remote host computer" field of the run dialog.)
#RemoteShellUserName = demo

# Default robot color
DefaultColor = blue

# Default robot name
DefaultRobotName = fred

# Directory to write the event logs.
# None are written if this is empty.
# EventLogDir = .

# Directory to write the event replay CDL files.
# None are written if this is empty.
# ReplayDir = .

# Extra robots to add to the run.
#ExtraRobots = "Enemy \"../wanderRobot1\" red (robot_type = HOLONOMIC, run_type= SIMULATION)"

# Offsets to start robots at.
RobotStart_dx = 1
RobotStart_dy = 0

# ********** CNL Architecture configuration ********************

# Directories to look in for link libraries.
# Separate each path with a colon.  Newlines are allowed after the colon.
lib_paths = /net/hr1/robot/mission/lib

# List of comma separated directories and root names of the
# CNL source files and libraries to load.
# Will try to load libxxx.a and include xxx.inc as the cnl header file
# The editor will look for yyy.cnl in these locations for each extern agent
CNL_libraries = /net/hr1/robot/mission/lib/cnl

# directories to look in for CNL source files to display in the editor.
CNL_sources = /net/hr1/robot/mission/src/libcnl
```

```
# cflags parm passed to C++ compiler
cflags = -g,
 -I/net/hr1/robot/mission/include

# ldflags parm passed to C++ compiler
ldflags = -L/net/hr1/robot/mission/lib,

#include sun malloc debugger
#   /usr/lib/debug/malloc.o,
#
# include this to add the electric fence malloc debugger
# -lefence,

-lcthreads,
CNL_LIBS,
-lhardware_drivers,
-lipt,
-lstdc++,
-lm

# *********** UGV Architecture configuration ********************


# *********** Real robot configuration flags ********************
#The list of real robots we know about
robots = HServer

# Any misc robot settings that will be dumped to the script file
MiscRobotSettings = "set show-trails on",
    "set scale-robots on",
    "set ROBOT-LENGTH 0.5"

# Any list of strings attached to the robot name will be appended
# to the startup parameters for that robot.  The robot names are
# case sensitive.

HServer  = "robot_type = HSERVER",
 "robot_name = fred",
 "color = blue",
 "danger_range = 1.0",
 "compass_type = NOCOMPASS",
 "use_reverse = 0",
 "draw_obstacles = 1",
 "lurch_mode = 0",
 "wait_for_turn = 0",
 "drive_wait_angle = 90",
 "adjust_obstacles = 1",
 "use_sonar = 1",
 "use_laser = 1",
 "use_cognachrome = 1",
 "wait_for_ack = 0"
```

3.4.2 Running *CfgEdit*

CfgEdit can also take several optional arguments. Before you run *CfgEdit*, make sure you are running iptserver (Section 3.1) and "Empty.ovl" (or another default overlay file you specified in the line "Default-

Overlay" of your configuration file) is in the directory from where you will run the *CfgEdit* from, so that when you run *mlab* within *CfgEdit*, it will run properly. You can find "Empty.ovl" in [*your MissionLab home*]/demos/pioneer_demos and/or [*your MissionLab home*]/overlays directory. The full form is:

```
% cfgedit [-vls] [-c rcfile] [cdlfile]
```

All the arguments are optional. The main argument, *cdlfile* or CDL file, is the name of a file written in the Configuration Description Language (CDL). *CfgEdit* creates a CDL file when you save a mission with "Save Configuration As" from the file menu. The CDL file have an extension of ".cdl" .

The other options are for:

`-v` The verbose mode. This option will print out the modes you set up in the ".cfgeditrc" file when you run *CfgEdit*.

`-l` Turn on the debugging mode for the CDL parser. This option will print out debugging information for the CDL parser (yyparse). *CfgEdit* uses this parser to process the CDL code in order to extract the information needed to generate CNL (Configuration Network Language) code. This option and "`-s`" option below are probably not very helpful to anyone but the developers.

`-s` Enable debugging of the *cdl* code generator. When you try to "Compile" a robot executable with *CfgEdit*, at first the CDL code will be translated into CNL code by the *cdl* code generator. This option prints out the debugging information during the translation process.

`-c` *rcfile* *CfgEdit* can also take another configuration file rather than ".cfgeditrc". Append the name of the configuration file written in same format as ".cfgeditrc" after "-c".

After invoking *CfgEdit* with the command above, you will see the main window and a pop-up window asking you to choose one of the three options: "New Robot", "Load Robot", and "Quit" (Figure 3 on Page 7). If you choose "New Robot", *CfgEdit* will load the configuration specified in ".cfgeditrc". The default is set to be "PIONEER_Full_Config.cdl". If you choose "Load Robot", *CfgEdit* will ask you to select a previously saved configuration (CDL file). You can also load a saved configuration from by selecting "Open" from the "File" menu from the menu bar on top of the window. Choosing "Quit" will exit *CfgEdit*.

3.4.3 Browsing the Configuration Tree

The first box you see in the window when you start *CfgEdit* (Figure 4 on Page 8) is the top level of the configuration tree. As you can see from the diagram in Figure 34, this level combines numbers of individual robot configurations as a group. In other words, *CfgEdit* is implemented with the capability of creation, configuration, compilation, and execution of missions for multiple robots. For example, if you wish to create two robot executables which has the same mission and configuration, go to the 2nd level by middle-clicking the "Kind of: Assemblage" box, highlight the "Kind of: Robot" box by left-clicking it, copy it by selecting "Copy" from the "Edit" menu in the menu bar, and paste it by selecting "Paste" from same "Edit" menu. Note that the box that has just been pasted will overlap with the original one, so you may want to move it to somewhere in the screen by dragging it (Figure 35). You can also replace the procedures above with selecting "Duplicate" from the "Edit" menu. If you wish to go back to see one level higher than the level where you are, you can left-click the `Up 1 Level` button in the left menu bar.

The third level of the configuration tree describes what state machine is binding to each actuator. This level can be reached by middle-clicking the "Kind of: Robot" box from the second level. The default configuration (PIONEERAT_Full_Config.cdl) is bound with two actuators, wheels and camera (Figure 5).

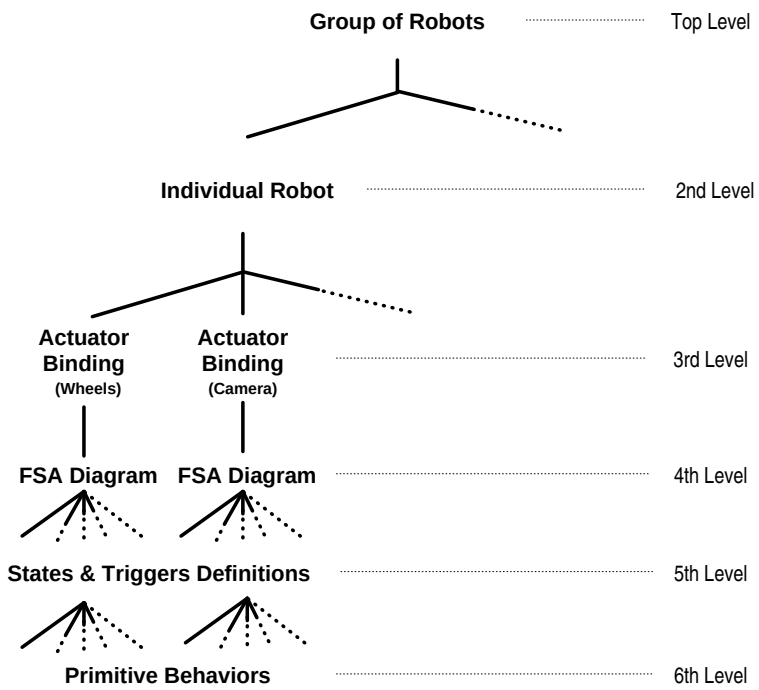

Figure 34: *CfgEdit* - a typical configuration tree.

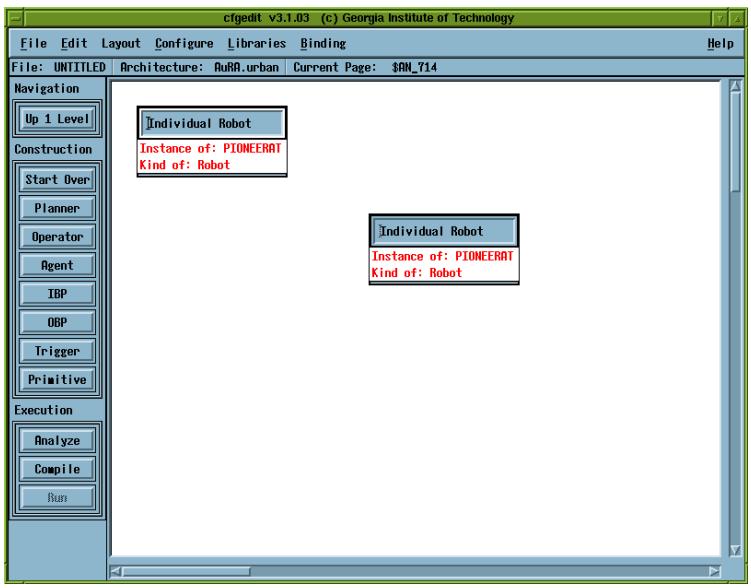

Figure 35: *CfgEdit* - the second level with two robot-configurations.

If you middle-click either of the "Instance of: FSA" boxes, you can reach the Finite State Acceptor (FSA) diagram (the fourth level). Each of the actuators has its own FSA diagram and you can construct a mission using a set of pre-defined tasks/states and triggers (Figure 6). The construction of a mission using this FSA diagram is explained in Section 3.4.4.

The information specified up to this point (from the top level to the fourth level) is stored in a CDL file. This is in plain text format so you can view this file with any editor. The details of CDL are explained in Section 3.5.

To find out how each state and trigger is defined, you may want to go to the fifth level by shift-middle-click (while pressing the `Shift` key, click the item with the middle button of the mouse). Middle-click the next box which has a label "Move to the specified location", and now you should see a figure of four boxes (Figure 36). This figure shows that the "GoTo" state generates the heading by taking the summation of the vectors towards the goal location, away from the obstacles, and towards the direction the user specified using Telop. By middle-clicking any of the three "Kind of: Assemblage" boxes (for example, the one for "Move the robot to the goal" in this case), you can find that this vector was computed by the primitive behavior "MOVE_TO" or the "Move-to-goal" schema [1] after the goal location was defined (Figure 37). The definition of the other states and triggers that can be obtained by shift-middle-clicking them at the FSA diagram (the fourth level). One thing you may want to note is that, unlike the information you specified in the FSA diagram or above levels, the definition of each state and trigger cannot be, generally, modified with the *CfgEdit* window unless you import it to your system. These definitions are defined in [*your MissionLab home*]/src/cdl_code/agents.AuRA.urban (also linked from [*your MissionLab home*]/lib), not the CDL file that ends with ".cdl". When you select to `Compile` the robot executable, at first by default this "agents.AuRA.urban" file will be bound to the CDL file.

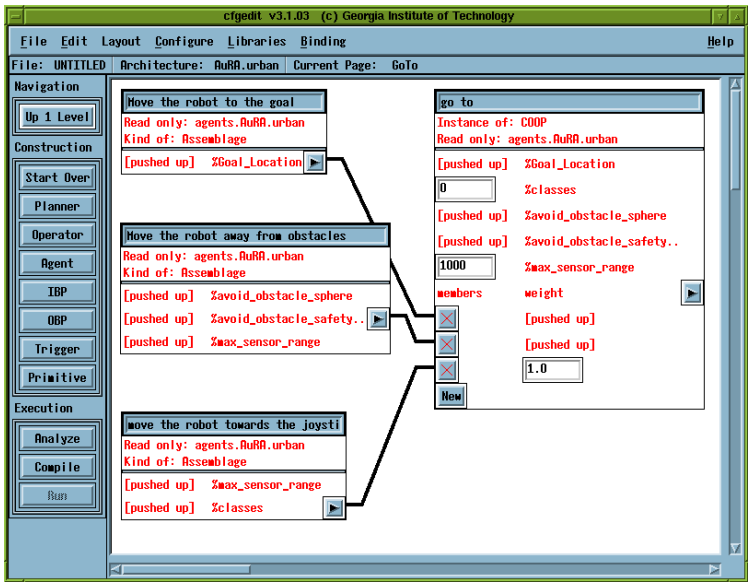

Figure 36: *CfgEdit* - the definition of the "GoTo" state.

Some states, however, contain nested sub-FSA states and triggers. In other words, a state is composed with a set of other states and triggers. Figure 38 shows, for example, nested sub-FSA states and triggers for the "SurveyRoom*" state. You can observe them by shift-middle-click the state once, and middle-click the next two boxes. Even though, the definition of the state with nested sub-FSA states and triggers are defined in [*your MissionLab home*]/src/cdl_code/agents.AuRA.urban, you can rearrange those after importing them to your system.

Finally, *CfgEdit* is also capable of showing how each primitive behavior is coded. The primitive behaviors are written in CNL, and stored in [*your MissionLab home*]/src/libcnl directory as a library (*libcnl.a*). Upon

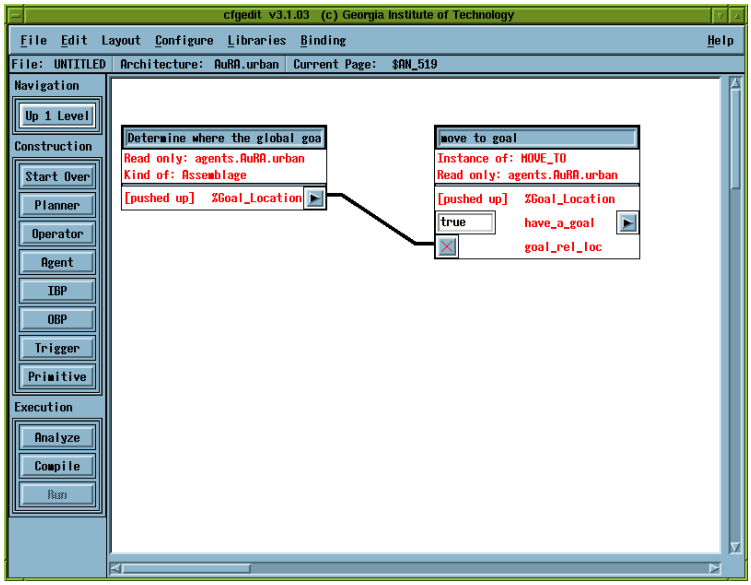

Figure 37: *CfgEdit* - the definition of the "Move the robot to the goal".

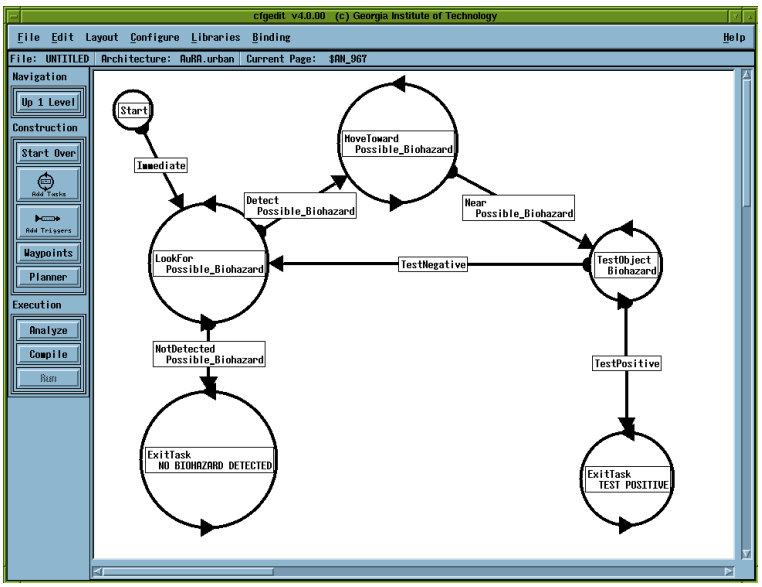

Figure 38: *CfgEdit* - a set of sub-FSA states and triggers in the **SurveyRoom*** state.

compilation, it will be linked to the robot executable. For example, to see the CNL code for the "MOVE_TO" behavior, middle-click the "Instance of: MOVE_TO" box (Figure 37), and the CNL code will pop up as shown in Figure 39. See Section 3.6 for details on CNL.

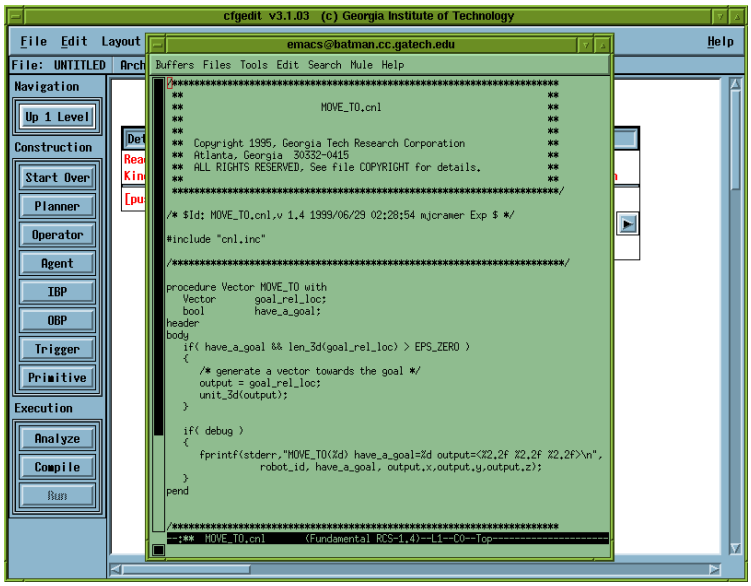

Figure 39: *CfgEdit* - the CNL code for "MOVE_TO" behavior is popped up.

3.4.4 Building a Mission

Construction of a mission using the FSA diagram can be done at the fourth level of the configuration (Figure 6 on page 9). When you first reach this level, you find a "Start" state. To add a new state, left-click the `Add Tasks` button located in the left menu bar, move the pointer to the display area, and left-click again. The default new state is a "Stop" state (Figure 7 on page 10). You can modify this state by right-clicking it, and choose an appropriate state from the list that pops up. The possible states you can choose from are:

- **AboutFace**: The robot faces in the opposite direction from the original.
- **Alert**: The robot alerts the user by sending a specified message. The user will received the message by the pop-up window on the *mlab* console, and, if specified, by email.
- **AssistedGoTo**: The robot behaves as same as the **GoTo** state (explained below) as long as the robot is progressing towards the goal. However, if the robot is making no progress, the robot behaves as same as the **Telop** state (explained below), so that the user can assist the robot moving towards the goal using the Teleautonomous Operation (*Telop*). This state is composed with a set of sub-FSA states and triggers: **Start**, **Immediate**, **GoTo**, **NoProgress**, **Telop**, and **TelopComplete**.
- **EnterAleternateHallway**: The robot enters an adjoining hallway using the docking behavior [1]. The direction of the robot heading is chosen randomly after passage.
- **EnterRoom**: The robot enters a room through the nearest door using the docking behavior [1]. It can be specified to enter the room through either an unmarked door or any door.
- **ExitTask**: This state is usually used in a sub-FSA state. For example, the **SurveyRoom*** state (Figure 38) contains two **ExitTask**s to reflect the two conditions for the robot to finish the surveying room task: one for when the robot did not find a biohazard in the room, and the other one for when

the biohazard was detected. **ExitTask** takes a string to notify the main-FSA. When the string of the **TaskExited** trigger in the main-FSA matches with the **ExitTask**'s string, as in Figure 40, the robot can move on to next state which the **TaskExited** trigger is pointing to.

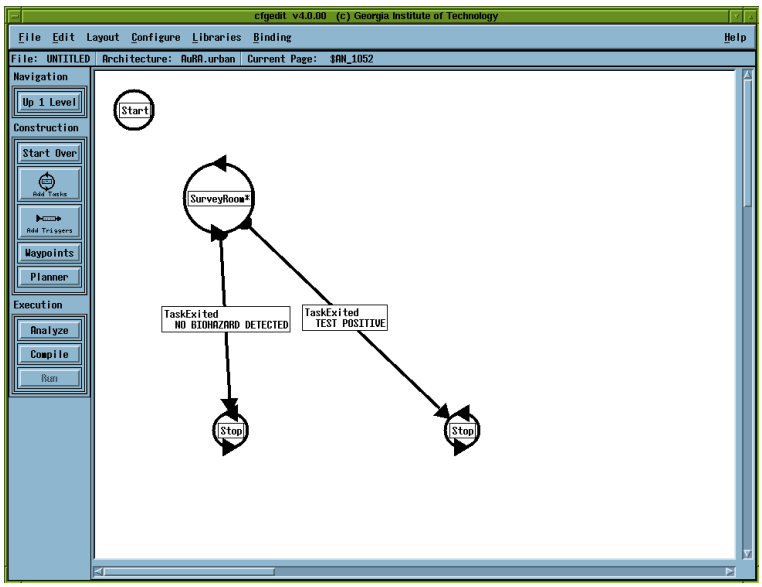

Figure 40: *CfgEdit* - two **ExitTask** triggers pointing out from the **SurveyRoom*** state.

- **Follow**: The robot follows either a friendly robot or an enemy robot.
- **GoThroughDoor**: The robot enters a nearest door it finds.
- **GoTo**: The robot moves to a location specified in X - Y coordinates. You can type in the location as well as pick them from an overlay. If you left-click the `Pick from Overlay` button, *mlab* will pop up and ask you which overlay you want to use. Once the overlay is selected, you can left-click a desired position and it will be automatically translated into the X-Y coordinate. As you can see from Figure 41, some states (e.g., **GoTo** and **MoveToward** below) have the option that you can modify the gains of their primitive behaviors that are incorporated into the state. For example, if you increase "move_to_location_gain", the attraction to the goal becomes larger while increasing "avoid_obstacle_gain" will cause repulsion from obstacles to be larger. The other parameters you can modify from this window are sizes for the sphere of influence and safety sphere for the obstacle avoidance behavior: "avoid_obstacle_sphere", and "avoid_obstacle_safety_margin", respectively. The zone of influence is the area where robots react with the obstacles, and if the robots are in the safety zone, virtual collisions are assumed to occur. To see how gains are set in your constructed FSA, toggle "Show state/trigger parameters" function in the third entry of the "Layout" menu.
- **GotoOutdoorNavigation**: The robot moves to the specified location with a swirling motion while avoiding obstacles.
- **GotoSoundSource**: The robot moves in the direction of the sound source.
- **LeaveRoom**: The robot leaves the room behind the nearest door using the docking behavior [1].
- **Localize**: The robot localizes its current position to be the specified values.
- **LookFor**: The robot moves back and forth until it sees the specified object. This is another example of a state with nested sub-FSA states and triggers. It is composed with: **Start**, **Immediate**, **MoveForward**, **MovedDistance**, **AboutFace**, **AboutFaceCompleted**, **Wait**, **Stops**, and **Detect**.

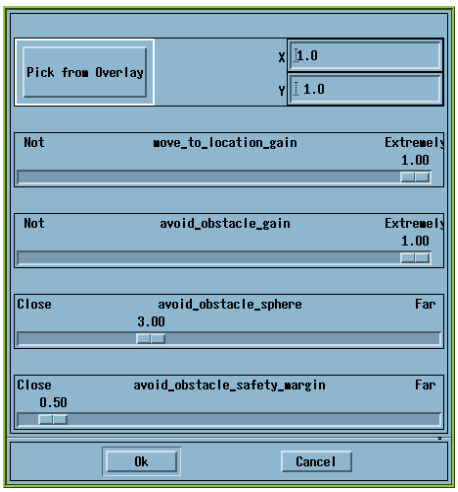

Figure 41: *CfgEdit* - modifying parameters for the GoTo state

- **Mark**: The robot marks the nearest object to be the specified object.
- **MarkDoorway**: The robot marks the nearest doorway. This state is useful when the user wants the robot not to go through the door it already went though once.
- **MoveAhead**: The robot moves to the compass direction specified by the user (East = 0, and North = 90).
- **MoveAway**: The robot moves away from selected types of objects.
- **MoveForward**: The robot moves in the directionit is currently facing.
- **MoveInFormation**: A group of robots moves to a goal location in a specified formation.
- **MoveToward**: The robot moves to the closest object of a certain type.
- **Notify**: The robot sends a notification with a message prespecified by the user. The message can be sent across different FSAs and is received by the **Notified** trigger by matching the message string. It is useful when the user wants to create a mission which requires synchronization of two FSAs. This message will not be, however, sent to different robots. Use **NotifyRobots** (explained below) for communicating with other robots.
- **NotifyRobots**: This state works similar to how **Notify** works (explained above). However, in this state, the robot can pass the message to other robots, and received by the **Notified** trigger by matching the message string. It is useful when the user wants to create a mission in which one robot sends commands to or synchronizes with other robots.
- **PickUp**: The robot picks up nearest object specified by the user.
- **ProceedAlongHallway**: The robot moves down the hallway. This state is assembled by "Move-to-goal", "Stay-on-path", and "Avoid-static-obstacles" schemas [1].
- **PutInEOD**: The robot puts the object it is carrying into the EOD (explosive ordnance disposal) area.
- **SetCameraTrackerMode**: The robot changes its tracking mode.
- **Stop**: The robot stops moving.

- **SurveyRoom***: As explained in the **TaskExited** section above, **SurveyRoom*** is an example of states with nested sub-FSA states and triggers (Figure 38). Assuming that the robot is in a room, it looks for a possible object (e.g., biohazard). If the robot finds the possible biohazard, it will conduct a test to identify whether the object is a real biohazard or not. The robot will exit this task if the object was a real biohazard. If the object was not a real biohazard, the robot will keep looking for another possible biohazard. The robot will also exit the task if it determines that there is no possible biohazard in the room. In the *MissionLab* system, the "*" at the end of a state name, like **SurveyRoom*** or **WanderRoom***, denotes that this state contains at least one **TaskExited** state in its nested sub-FSA states and triggers, and when the user chooses this state from the menu, the **TaskExited** trigger will be automatically generated to match with the **TaskExited** (e.g., see Figure 40). **SurveyRoom*** is composed with the following nested sub-FSA states and triggers: **Start**, **Immediate**, **LookFor**, **Detect**, **NotDetected**, **MoveToward**, **Near**, **TestObject**, **TestNegative**, **TestPositive**, and **ExitTask**.
- **Talk**: The robot reads and talks specified message.
- **Telop**: It enables the Teleautonomous Operation (Telop). You can drive the robot with a joystick-like window.
- **Terminate**: The robot kills its own process.
- **TerminateObject**: The robot terminates the nearest (red) object.
- **TestObject**: The robot performs a test to identify the object. The user can use the **TestPositive** or **TestNegative** trigger (both explained below) to get out from the state and move on to next one.
- **UnmarkDoorway**: The robot unmarks the nearest doorway.
- **Wander**: The robot moves in random directions.
- **WanderRoom***: This state also contains nested sub-FSA states and triggers. Assuming that the robot is in a room, the robot tries to moves randomly while it tries to maintain being inside the room, until a timer expires. **WanderRoom*** is composed of the following sub-FSA states and triggers: **Start**, **Immediate**, **Wander**, **InRoom**, **EnterRoom**, **InHallway**, **Wait**, and **ExitTask**.

If you create more than one state in the mission, you can connect them with triggers. Once the condition specified in the trigger is satisfied, the robot will transition to the next state to which the trigger is pointed (Figure 11 in Page 12). To connect two states, left-click the `Add Triggers` button located on the left menu bar, press down the left button of the mouse on the state where you want to have the transition from when the condition is satisfied, drag the arrow to the next state, and release it. The modification of triggers is done in the same manner as for the states above. You can choose the triggers from:

- **AboutFaceCompleted**: The transition occurs when the robot faces in the opposite direction.
- **Alerted**: The transition occurs when the alert message has sent.
- **AtDoorway**: The transition occurs when the robot detects a doorway.
- **AtEndOfHall**: The transition occurs when the robot reaches the end of the hallway.
- **AtGoal**: The transition occurs when the robot is at the specified location. You can also specified a tolerance of which how far the robot can be off from the goal location.
- **AtGoalInFormation**: The transition occurs when a group of robots is at the specified location, and forming a specified formation.
- **AwayFrom**: The transition occurs when the robot is away from specified objects.

- **ClearFlag**: The transition occurs immediately, and this trigger clears the named flag to false.
- **Detect**: The transition occurs when the robot detects the object specified.
- **DetectAlternateHallway**: The transition occurs when the robot detects a intersection of hallways.
- **DetectMotivated**: The transition occurs when the robot sees an object and all motivational variables have values that fall in the intervals specified by the corresponding upper and lower thresholds for each variable.
- **DetectSound**: The transition occurs when the robot hears a sound having higher volume than the volume_threshold.
- **DetectSoundMotivated**: The transition occurs when the robot hears a sound and is suitably motivated. This trigger combines sound capabilities and motivational variables (Section 3.2.9). When the current curiosity level of the robot is above a given threshold, it behaves like DetectSound mentioned above. Moreover, every time this trigger gets activated, the curiosity value of the robot is decreased by 0.10. This effectively makes the robot indifferent to sounds after a while (habituation).
- **FlagsClear**: The transition occurs when the flag is not set.
- **FlagsSet**: The transition occurs when the flag is set.
- **Holding**: The transition occurs when the robot is holding the specified object.
- **Immediate**: The transition occurs immediately without any condition.
- **InAlternateHallway**: The transition occurs when the robot enters the alternate hallway.
- **InHallway**: Transition occurs when the robot is within a hallway.
- **InRoom**: Transition occurs when the robot is within a room.
- **IsFacing**: The transition occurs when the robot is facing a specified compass direction.
- **MarkedDoorway**: The transition occurs when the nearest doorway has been marked.
- **MessageSent**: The transition occurs immediately after a message has sent.
- **MovedDistance**: The transition occurs when the robot has moved a desired distance.
- **Near**: The transition occurs when the robot is near specified objects.
- **Never**: The transition does not occur. It may be useful for debugging.
- **NoProgress**: The transition occurs when the robot is stuck and making no progress moving towards the specified goal.
- **NotAtEndOfHall**: The transition occurs when the robot is not near the end of the hallway.
- **NotDetected**: The transition occurs when the object once detected by the robot is no longer in sight.
- **NotHolding**: The transition occurs when the robot is not holding the specified object.
- **Notified**: The transition occurs when the robot receives a message that was sent by the **Notify** state or the **NotifyRobot** state (both explained above).
- **SetFlag**: The transition occurs immediately, and this trigger sets the named flag to true.
- **TaskExited**: As it was explained in the **ExitTask** section above, the transition occurs when the robot is in the **ExitTask** state of the sub-FSA whose message string matches with the one specified for this trigger.

- **TelopComplete**: The transition occurs when the *Telop* window is closed.
- **TestNegative**: The transition occurs when the result of the **TestObject** state (explained above) is negative.
- **TestPositive**: The transition occurs when the result of the **TestObject** state (explained above) is positive.
- **ThroughDoorway**: The transition occurs when the robot passes through a doorway.
- **UnmarkedDoorway**: The transition occurs when the nearest doorway has been unmarked.
- **Wait**: The transition occurs when the timer expires.

For building the mission, all the edit functions "Copy", "Duplicate", "Cut", and "Paste" in the "Edit" menu are supported by *CfgEdit*. However, the "Delete" function is not yet implemented, and "Cut" may cause a problem when it is used as a substitution of "Delete". In other words, please note that all the items that are "Cut" have to be pasted somewhere in order for the robot to behave properly.

If you make a mistake during the construction of the robot mission and you wish to start over, left-click the `Start Over` button located on the left menu bar. *CfgEdit* will, then, clear the entire mission, and start a new configuration without killing its process.

3.4.5 Using Waypoints Tool

If you want to create a robot mission in which the robot navigates the environment via a sequence of points, you might find this "Waypoints" tool useful. This function can be invoked by the `Waypoints` button located on the left side of the screen during the construction of a FSA mission.

This waypoint function converts the *mlab* console into the waypoints-creation mode. After choosing an appropriate overlay from the menu, waypoints can be selected by just clicking the left mouse button on the window (Figure 42). Middle clicking will allow you to delete an added waypoint when it was created by mistake, and right clicking exits *mlab*'s waypoint mode. If you wish, you can save the waypoints in an overlay file. An example constructed FSA with the waypoints tool and the executed waypoints mission are shown in Figure 43 and 44, respectively.

3.4.6 Using Path Planning Tool

In addition to the waypoint specification functionality described in Section 3.4.5, *CfgEdit* allows users to take advantage of a full scale path planner when specifying missions.

Path Planner

The path planner is a separate program invoked from Cfgedit when users press the `Planner` button located on the left side of the screen. Pressing the button opens a separate window that displays a map (Figure 45). The user must specify a start and end position for the robot by left clicking on the map. The planner then constructs a path between these two points. The user has the option of constructing another path by repeating the clicks or quitting the planner by middle clicking or right clicking on the map window.

The path generated by the planner consists of a series of line segments. After quitting, the planner saves the points forming the line segments in a file named "points.txt" (in the directory from which *CfgEdit* was

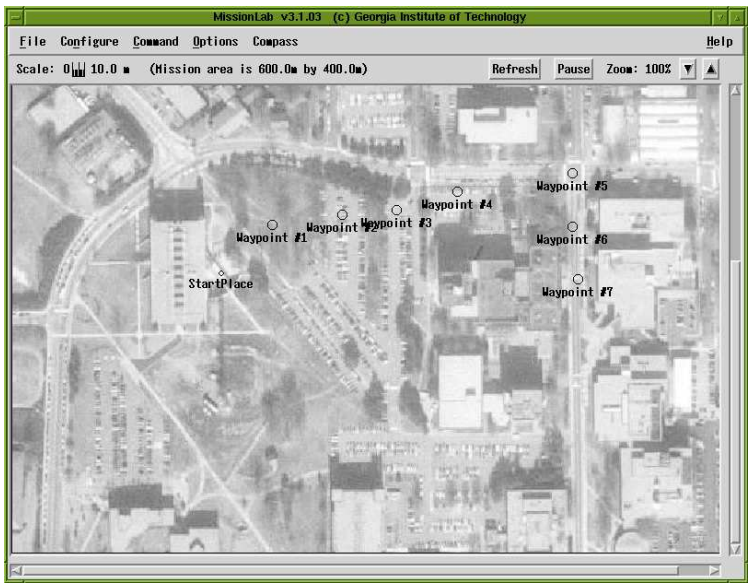

Figure 42: *mlab*: adding waypoints.

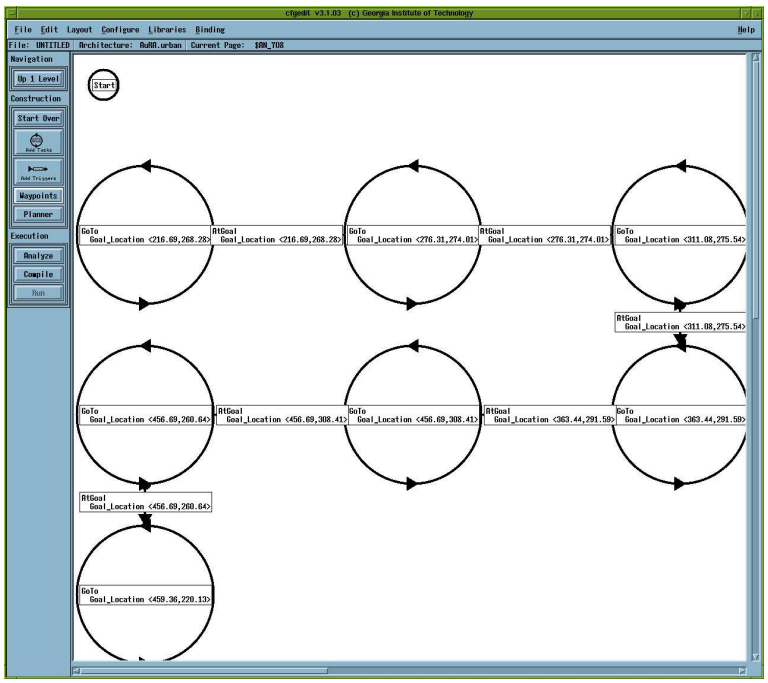

Figure 43: *CfgEdit*: constructed FSA with the waypoints function.

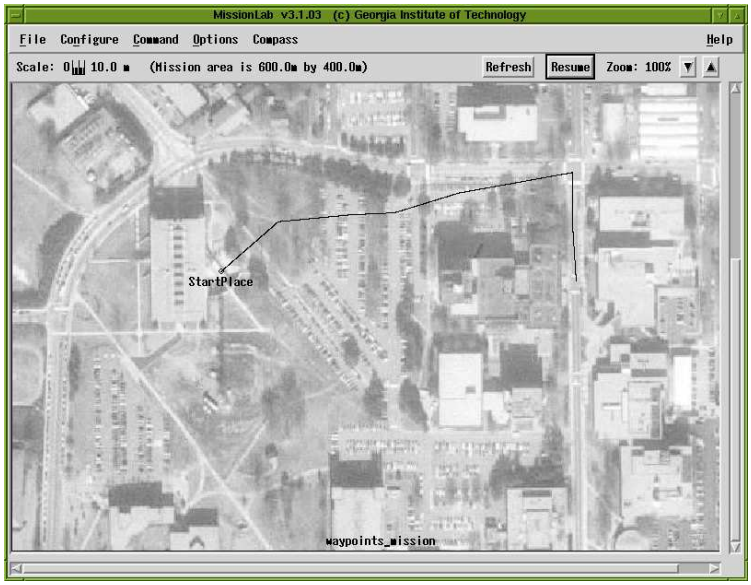

Figure 44: *mlab*: robot executing the waypoints mission.

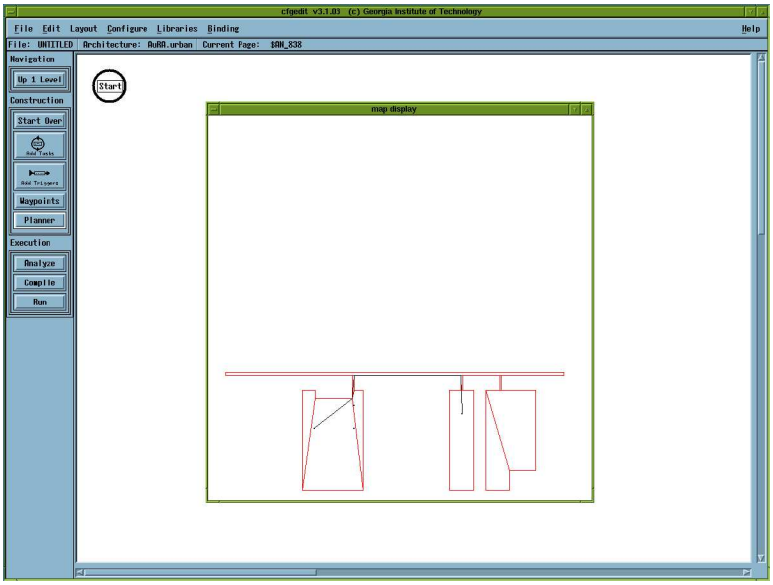

Figure 45: Path Planner Window.

invoked). This file serves as the interface between the planner and *CfgEdit*. *CfgEdit* reads that file and constructs an FSA similar to the one shown on Figure 46. This FSA can be compiled and executed as shown in Figure 47. Note, however, that *mlab* uses the overlay file to run the mission and not the map file that was used by the planner.

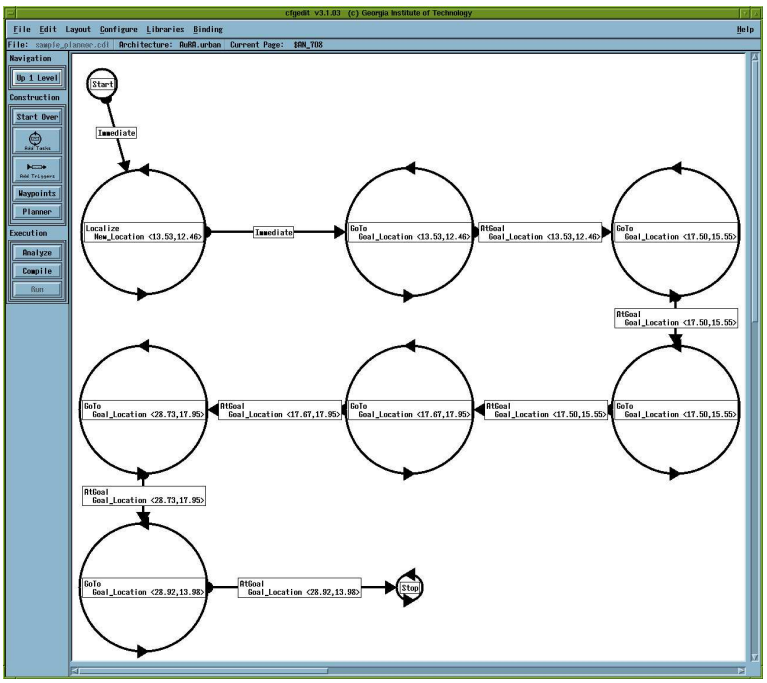

Figure 46: *CfgEdit*: generated FSA by the path planner.

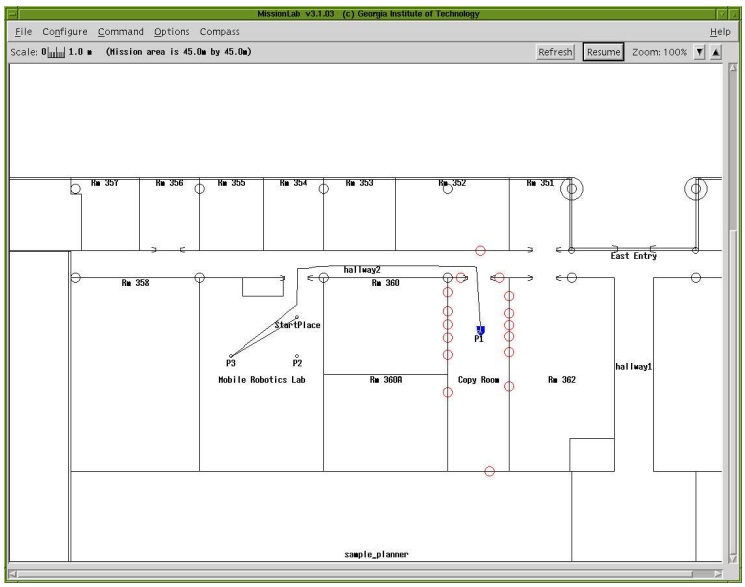

Figure 47: *mlab*: a robot following the path planned by the path planner.

How the Planner Works

The code for the path planner can be described in six steps:

1. Reads a description of the environment from a map file. This file defines the position of the walls and obstacles in the environment. The walls should form a closed polygon which we call the environment border. The format of this file is described below.

2. Before we do any form of path planning we have to apply some standard techniques from the robot motion planning literature. We define a configuration space by shrinking the border by the radius of the robot. From now on all operations are performed using the shrunk border only. This is the reason why the displayed map (Figure 45) may look strange.

3. The result from Step 2 is a complex polygonal region. To simplify the path planning task we partition this border into a set of convex polygonal regions. This explains why the map on Figure 45 has lines across the rooms.

4. The user is now prompted to specify start and end points for the robot path. This is done by asking the user to click twice (once for each point) in the window displaying the map.

5. The two points from Step 4 are passed as arguments to the path planning module and a path is constructed between them. The path consists of a sequence of line segments connecting the start and end points. The line segments do not cross the boundary or the obstacles at any point. The path planning module uses the A* algorithm to find the path.

6. Outputs a text file which specifies the path that the robot should follow. The format of this file is described below.

File Format for the Map Files (*.map)

The map file describes the environment in which the robot will be moving. The file is a regular text file with format as described below. The file has three sections: walls, obstacles, and landmarks. Each of the sections begins with a keyword and a number. The keyword is just the name of the section (in capital letters) and the number specifies how many lines for this section follow. Please note that the map file is similar to the overlay file but has different format. This is dictated by the specifics of the path planner that requires that all points on the map are specified in counterclockwise direction for walls, and clockwise direction for obstacles. Walls should form a closed non-intersecting polygon; the same is true for every obstacle.

- **WALLS**: The entries in the WALLS section specify points in the Cartesian plane which if connected form a closed polygonal contour. The points have to be specified in counter-clockwise order and must form a complete contour. The first point should NOT be repeated at the end of the list.

- **OBSTACLES**: The entries in the OBSTACLES section are similar to the entries in the WALLS section but they have to be specified in clockwise fashion. As before the first point should NOT be repeated at the end of the list. The obstacles section specifies only one obstacle. To add more obstacles define multiple obstacle sections and end with a line containing 'OBSTACLES 0'.

- **LANDMARKS**: The entries in the LANDMARKS section specify environment landmarks. Each landmark is specified on a separate line. Each line contains two numbers (x and y coordinates of the landmark) and a string (type of landmark or how the landmark is displayed on the screen). The currently supported strings are SQ- for square and PIE-for a pieslice. This is still an experimental section of the path planner and in this release landmarks are not taken into account when generating the path.

Here is an example of a map file. The map that the planner generates from this file is shown in Figure 48. It differs from Figure 45 only by the obstacle in the middle of the room. Also note how the number, size and shape of the convex regions changes when the obstacle is added.

```
WALLS 32
3.75  17.3
16.85 17.3
16.85 16.2
14.3 16.2
14.3 17.1
11.67 17.1
11.67  5.5
19.29  5.5
19.29 17.1
18.32 17.1
18.32 17.3
28.08 17.3
28.08 17.1
26.91 17.1
26.91 5.5
30.67  5.5
30.67 17.1
29.55 17.1
29.55 17.3
32.09   17.3
32.09   17.1
30.67  17.1
30.67   5.5
34.4    5.5
34.4    7.5
37.12    7.5
37.12   17.1
33.56   17.1
33.56  17.3
40.0 17.3
40.0 18.95
3.75  18.95

OBSTACLES 3
15.0 11.0
15.0 9.0
16.0 8.0
OBSTACLES 0

LANDMARKS 7
34.0 6.5  SQ
13.0 15.1 SQ
14.0 14.1 SQ
38.5 18.0  PIE
15.5 12.0  PIE
8.5 17.3  PIE
28.5 17.5  PIE
```

Contents of the "points.txt" File Generated by the Planner [4]

File points.txt

```
13.53 12.46 1.0 0.45 0.40 0.23 0.5
17.5 15.55 1.0 0.45 0.40 0.23 0.5
17.5 15.55 1.0 0.45 0.40 0.23 0.5
17.67 17.95 1.0 0.45 0.40 0.23 0.5
28.73 17.95 1.0 0.45 0.40 0.23 0.5
28.92 13.98 1.0 0.45 0.40 0.23 0.5
```

Each line describes one point. The first two numbers are the point's x and y coordinates. The next four numbers specify values for the parameters of the GoTo assemblage (move_to_location_gain, avoid_obstacle_gain, avoid_obstacle_sphere, avoid_obstacle_safety_margin) which Cfgedit builds for each point. The last parameter is used By Cfgedit to set the value for the Goal_Tolerance parameter of the AtGoal trigger coming out of the GoTo state.

To summarize Each line contains 7 numbers corresponding to:

[4] The common user need not be concerned with this file it serves just as an interface between two programs that are likely to change often.

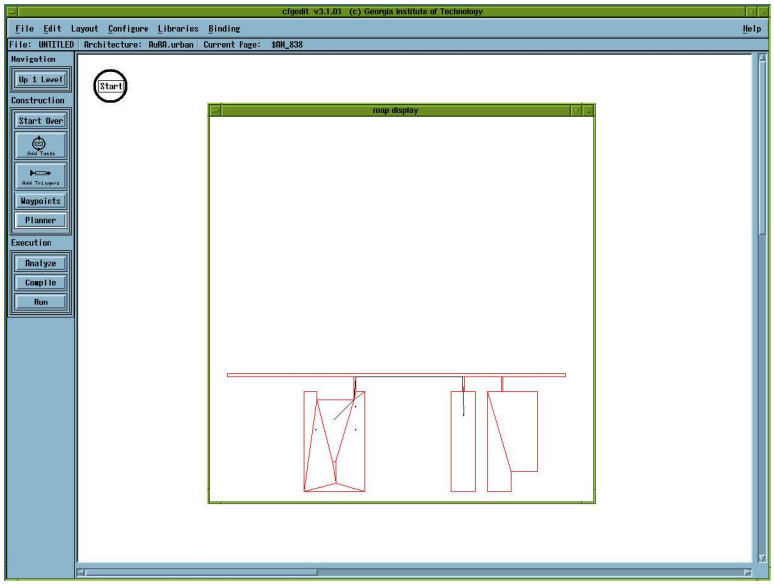

Figure 48: Path Planner Window: an obstacle exists in the middle of the room.

x
y
move_to_location_gain
avoid_obstacle_gain
avoid_obstacle_sphere
avoid_obstacle_safety_margin
Goal_Tolerance

Known Bugs

Currently there is no way to specify which *.map file to use with the planner when the planner is called from Cfgedit. It is hardwired in the code that the default file is "marc3f.map". However, if the path planner is called without parameters it will prompt for a file name.

When running a mission generated with the planner the robot appears to jump from its initial point to the start point for the mission. This is due to the fact that the start position of the robot is specified in the default overlay file and the robot is drawn there before the mission is even started. Therefore, the first state of the FSA generated by the planner is "localize" which changes the robot's position. The apparent jump has no effect on the mission other than leaving a robot trail as seen on Figure 47 .

3.4.7 Analyzing and Compiling the Robot Executable

Once you create a mission with the FSA diagram, and if you are comfortable with it, you can compile it to make a robot executable. To compile it, you can simply left-click the `Compile` button in the left menu bar. In order to check the feasibility of the real time running, you have to have a version of *MetaH*, a real-time analysis program, which was developed by Honeywell, Inc. for the DARPA sponsored Tactical Mobile Robotics project. If you have Honeywell's *MetaH*, you can invoke it by left-clicking the `Analyze` button located above the `Compile` button. However, because of the copyright issue, Honeywell's *rta* is not included in the *MissionLab* version 4.0 package. Thus, the current `Analyze` button will invoke a dummy program that mimics Honeywell's *rta*, but the result will be, of course, meaningless.

3.4.8 Executing the Robot Executable

As you can see from Figure 15 on Page 14, upon compilation, *CfgEdit* takes the following steps:

- **CDL ⇒ CNL**: The CDL (Configuration Description Language) file that contains information of the mission you created will be bound to [*your MissionLab home*]/lib/agents.AuRA.urban file that contains all the definitions for the states and triggers, and the *cdl* code generator produce a CNL (Configuration Network Language) code. As default, the CNL code will be saved in /tmp directory.
- **CNL ⇒ C++**: As soon as the CNL code is generated, the *cnl* compiler will be invoked, and it will be translated into a C++ code.
- **C++ ⇒ robot executable**: At this point, the GNU C Compiler (gcc) will compile the C++ code. The hardware drivers library (*libhardware_drivers.a*) and the primitive behavior library (*libcnl.a*) as well as other libraries in [*your MissionLab home*]/lib directory will be also linked to the robot executable.

As soon as you finish compiling a robot executable, you can run it with *mlab*. If you left-click the Run button in the left menu bar, *CfgEdit* will invoke the *mlab* and the run dialog (Figure 49) will ask you whether you want to run it as a simulation or run on a real robot (via *HServer*). The following are the options you can specify in the run dialog:

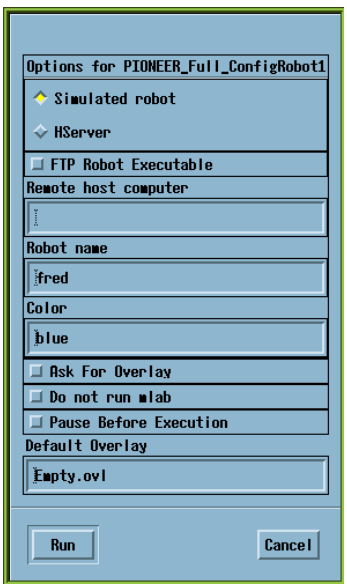

Figure 49: *CfgEdit* Run Dialog

- **Options for** <*robot name*>: This selection gives options to the users whether he or she wants to run the mission on a simulation (labeled "Simulated robot") or a real robot (labeled "HServer"). These options are defined in the ".cfgeditrc" file (Section 3.4.1).
- **FTP Robot Executable**: If this check box is set, cfgedit will attempt to ftp the robot executable over to the computer listed under *Remote host computer* before executing *MissionLab*. With this option, *mlab* will look for the robot executable in the directory, specified as *RemoteHostRobotDir* in the ".cfgeditrc" file, on the remote machine, then, execute it. In other words, the robot executable has to be previously saved in that directory prior to execution. *CfgEdit* is, therefore, equipped with the capability of transferring the binary via ARPANET File Transfer Program (FTP). After pressing the Run button, *CfgEdit* will login to the remote machine as the user who are specified as *RemoteShellUserName* in

the ".cfgeditrc" file and start downloading the file into *RemoteHostRobotDir* directory. In order for FTP to check the password automatically, you also have to create a file called ".netrc" in your home directory, and specify the password for the user *RemoteShellUserName*. If your remote machine is, for example, "cartman.cc.gatech.edu", and your *RemoteShellUserName* is "demo", your ".netrc" file should have the following lines:

```
machine cartman.cc.gatech.edu
login demo
password <password for user demo>
```

Since *mlab* uses *rsh* (remote shell) to execute the robot executable, you need to create the ".rhosts" file in the home directory of the *RemoteShellUserName*. on the remote machine as well. For example, if your username is "wendy" and your local machine is "stan.cc.gatech.edu", write this line in the ".rhosts" file:

```
stan.cc.gatech.edu wendy
```

- **Remote host computer**: If this field is empty the robot executable is executed on the current machine. If this field is filled the robot executable is executed on the remote host via an rsh. Default is set by ".cfgeditrc" option "DefaultHost =".
- **Robot name**: This name is used as an ID for *HServer* if the user chooses to run the mission on a real robot.
- **Color**: The color specified in this field will be the color of the robot showing up in the *mlab* console. You can choose any rgb color name which is supported by your machine (Choose a color which has no space within its name). However, due to a bug, if the display of the *mlab* console is exported on PC or SGI monitors, the robot color may be different from what you specified. If you export the display to Sun monitors, the color of the robot should appear appropriately.
- **Ask for Overlay**: If this check box is set, *mlab* will bring up a file dialog box asking for an overlay. If unchecked, mlab will use the overlay listed under **Default Overlay**.
- **Do not run mlab**: If this check box is set, *CfgEdit* will not invoke *mlab*, and the mission will not be run. Instead, all the running conditions that the user specified in this dialog will be saved in the CMDL file (Section 3.7). Usually, the saved CMDL file will be named after the name of the *CfgEdit* configuration the user specified with **Save As** option (except ".cdl"). If the user hasn't saved the configuration, the CMDL file will be named after the default configuration name specified by ".cfgeditrc" option "DefaultConfiguration =". The user may then run the mission with *mlab* directly from a command line:

  ```
  mlab -r <CMDL file name>
  ```

- **Pause Before Execution**: If this check box is set mlab will bring up a dialog box pausing the execution of the mission until the dialog box button is pressed.
- **Default Overlay**: The overlay file that mlab will use unless **Ask for Overlay** box is checked. Default is set by ".cfgeditrc" option "DefaultOverlay =". (Remember to have the default overlay in the directory where you are running *CfgEdit* from.)
- **Run**: Pressing this button will cause cfgedit to write out a cmdl file in the current directory with the selected configuration. *CfgEdit* will then execute *mlab* (unless "**Do not run mlab**" option is checked) with the correct command line arguments causing *mlab* to run the CMDL file, which was automatically generated by *CfgEdit*.
- **Cancel**: Pressing this button closes the dialog box without running the mission or saving the running options to a CMDL file.

3.4.9 Adding New States and Triggers

This section is for an advanced user, and describes how to add new states and/or triggers to the list that you use to create a mission. If you go through the following example steps, you can implement the "swirl" behavior into a new state.

1. **Choose Primitive Behaviors to Bind.** You have to have primitive behaviors to which your new state/trigger will incorporate. The primitive behaviors are written in the Configuration Network Language (CNL) and stored in the [*your MissionLab home*]/src/libcnl directory. You can use those existing ones, or, if you wish, you can create your own primitive behaviors. Programming in CNL is explained in Section 3.6, and, for details, please read the separate manual. Here, let us use the existing *MOVE_TO.cnl* (the "Move-to-goal" behavior) and *SWIRL_STATIC_OBSTACLES.cnl* (the "Swirl" behavior) that will be incorporated into our new state "GoTo_with_Swirl". If you choose to use the existing ones, make sure that each CNL code has "procedure Vector" instead of "procedure bool": "procedure Vector" is for a "state" while "procedure bool" is for a "trigger". For example, in *SWIRL_STATIC_OBSTACLES.cnl*, the procedure is specified as:

   ```
   procedure Vector SWIRL_STATIC_OBSTACLES with
   ```

2. **Declare Inputs to the Primitive Behaviors.** Once you decide which primitive behaviors to use, you have to declare the inputs to those behaviors, if they have not been declared, in the "default.gen" and "default.AuRA.urban" files. The "default.gen" and "default.AuRA.urban" files are for a generic robot and for the Autonomous Robotics Architecture (AuRA) robot[5], respectively, saved in the [*your MissionLab home*]/src/cdl_code directory, and also linked from for the [*your MissionLab home*]/lib directory. Since *MOVE_TO.cnl* had been already used by the "GoTo" state, you can find in "default.gen" and "default.AuRA.urban" that the inputs for the behaviors are defined as:

   ```
   // In default.gen
   defAgent displacement MOVE_TO(
       boolean have_a_goal,
       location goal_rel_loc);

   // In default.AuRA.urban
   defAgent[AuRA.urban] binds MOVE_TO Vector MOVE_TO(
       boolean have_a_goal,
       Vector goal_rel_loc);
   ```

   However, since this is the first time that *SWIRL_STATIC_OBSTACLES.cnl*[6] is to be used by any state, we have to declare its inputs. If you look at the *SWIRL_STATIC_OBSTACLES.cnl* file, you will find that the "Swirl" behavior takes six inputs: "sphere", "safety_margin", "open_space", "open_sphere", "readings", and "goal_rel_loc":

   ```
   // In SWIRL_STATIC_OBSTACLES.cnl
   procedure Vector SWIRL_STATIC_OBSTACLES with
      double sphere ;
      double safety_margin;
      double       open_space;
      double       open_sphere;
      obs_array    readings;
      Vector       goal_rel_loc;
   header
   body
   ```

[5] We used to use "default.AuRA" and "agents.AuRA" as our primary libraries in the past. We are now mainly using "default.AuRA.urban" and "agents.AuRA.urban", which are refined version of the previous one, and targeted for urban usage.

[6] Recently, it was also integrated into this system (*GoToOutdoorNavigation*). Therefore, you can skip this part.

"sphere" and "safety_margin" are the maximum and the minimum distances (in meters), respectively, that obstacles are reacted to by the swirl behavior; "open_space" is the minimum distance (in meters) that must be clear in a particular direction before it can be chosen as the heading by the swirl behavior; "open_sphere" is the maximum distance (in meters) that obstacles are reacted to to determine the heading by the swirl behavior; "readings" is an array that contains locations of obstacles; and "goal_rel_loc" is a vector directed to the goal location. Thus, let us declare these inputs in the "agents.gen" and "agents.AuRA.urban", respectively, as the following:

```
// Copy this in default.gen
defAgent displacement SWIRL_STATIC_OBSTACLES(
    const number sphere,
    const number safety_margin,
    const number open_space,
    const number open_sphere,
    location goal_rel_loc,
    obs_array readings);

// Copy this in default.AuRA.urban
defAgent[AuRA.urban] binds SWIRL_STATIC_OBSTACLES Vector SWIRL_STATIC_OBSTACLES(
    const double sphere = {3.0},
    const double safety_margin = {0.5},
    const double open_space = {0.5},
    const double open_sphere = {0.5},
    Vector goal_rel_loc,
    obs_array readings);
```

3. **Construct Behavioral Assemblages.** In *CfgEdit*, primitive behaviors are coordinated and assembled as states using the cooperative coordination operators (*COOP.cnl*), and they are defined in the files "agents.gen" and "agents.AuRA.urban". In our case, let us define the assemblages for the "GoTo_with_Swirl" state as the following, and paste it into the files. Probably, the best places to paste it into the files are just after the "GoTo" state is defined:

```
// Copy this in both agents.gen and agents.AuRA.urban
//*********************************************************
GoTo_with_Swirl:[
   %Goal_Location = {1.0, 1.0},
   %move_to_location_gain = {1.0},
   %swirl_obstacle_gain = {1.0},
   %swirl_obstacle_sphere = {3.0},
   %swirl_obstacle_safety_margin  = {0.5},
   %swirl_obstacle_open_space = {0.5},
   %swirl_obstacle_open_sphere  = {0.5},
   COOP(
      %Goal_Location = {^},
      %classes = {0}, // Will avoid everything.
      %swirl_obstacle_sphere = {^},
      %swirl_obstacle_safety_margin  = {^},
      %swirl_obstacle_open_space = {^},
      %swirl_obstacle_open_sphere  = {^},
      %max_sensor_range = {1000},
      members[A]<10,10>  = $MoveToGoal,
      members[B]<10,130> = $Swirl_Obstacles,
      weight[A] = {^Range_01 %move_to_location_gain},
      weight[B] = {^Range_01 %swirl_obstacle_gain})<350,10>|GoTo and Swirl|
]<10,10>|Move to the specified location with swirling obstacles|
//*********************************************************
```

Notice that this assemblage is similar to the one defined in the "GoTo" state, except that "GoTo_with_Swirl" takes "$Swirl_Obstacles" as the member[B] instead of "$Avoid_Obstacles", and there is no "$Telop". The "$" sign in front of the function name indicates that this function is defined within the file, and calls the corresponding primitive behavior. For example, if you look at "agents.gen", or "agents.AuRA.urban", you will find the definition for "$MoveToGoal" because its "Move-to-goal" behavior was being used by the "GoTo" state. The weight for each behavior is specified by the line "weigh[*] =", and "^Range_01" means this value can be modified by a slider bar. The parameters specified in the lines above "COOP(...)" are the ones that you are going to be able to modify from the *CfgEdit* window (by middle-clicking the state in the FSA diagram). Their default values are specified in the braces {}. Each parameter then has to be specified within "COOP(...)" again, to be carried into the primitive behaviors. "{^}" indicates that the value is pushed up from higher levels. You may also want to note that the numbers specified as "⟨n1, n2⟩" are coordinates that are used by the *CfgEdit* window to calculate the position of the items. Now, let us define our "$Swirl_Obstacles" as the following, and paste it in the same files, just after "$MoveToGoal" is defined.

```
// Copy this in both agents.gen and agents.AuRA.urban
//*********************************************************
$Swirl_Obstacles:[
   %Goal_Location = {^},
   %swirl_obstacle_sphere = {^},
   %swirl_obstacle_safety_margin  = {^},
   %swirl_obstacle_open_space = {^},
   %swirl_obstacle_open_sphere  = {^},
   %max_sensor_range = {^},
   SWIRL_STATIC_OBSTACLES(
        %Goal_Location = {^},
        %max_sensor_range = {^},
        sphere = {^Distances_10 %swirl_obstacle_sphere},
        safety_margin = {^Distances_10 %swirl_obstacle_safety_margin },
        open_space = {^Distances_10 %swirl_obstacle_open_space},
        open_sphere = {^Distances_10 %swirl_obstacle_open_sphere},
        goal_rel_loc<10,50> = $GoalRelLoc,
        readings<10,81> = $ListOfObstacles
   )<393,26>|swirl obstacles|
]<66,36>|Swirl obstacles|
//*********************************************************
```

Again, the parameters specified in the lines above SWIRL_STATIC_OBSTACLES(...) are pushed up from the previous COOP(...). Those values are then carried inside SWIRL_STATIC_OBSTACLES(...) to match with its inputs that you declared in "default.gen" and "default.AuRA.urban".

4. **Experiment with the New State.** At this point, you have completed adding the new state. The following commands may help you to see if you have successfully implemented the state:

```
cd [your MissionLab home]
mkdir test
cd test
cp [your MissionLab home]/overlays/Empty.ovl .
cp [your MissionLab home]/overlays/BigObstacle.ovl .
iptserver &
cfgedit
```

Now, create a "back_and_forth"-robot as you did in Section 2.2.2, except that, this time, use the newly created "GoTo_with_Swirl" state instead of the "GoTo" state. If you left-click a state in the FSA diagram, you should see the "GoTo_with_Swirl" state in the list as it is shown in Figure 50. To pick

the "Goal_Location" of the two points the robot is going back and forth, you may want to use the `Pick From Overlay` feature: pick the two points, "StartPlace" and "Goal", in the "BigObstacle.ovl", for example. After you change "move_to_location_gain" to be 0.1, and "swirl_obstacle_sphere" to be 10.0, your mission will look like the one in Figure 51. After compiling and executing the robot executable, if your robot leaves the trace that swirls around the obstacle (Figure 52), you have successfully added a new state.

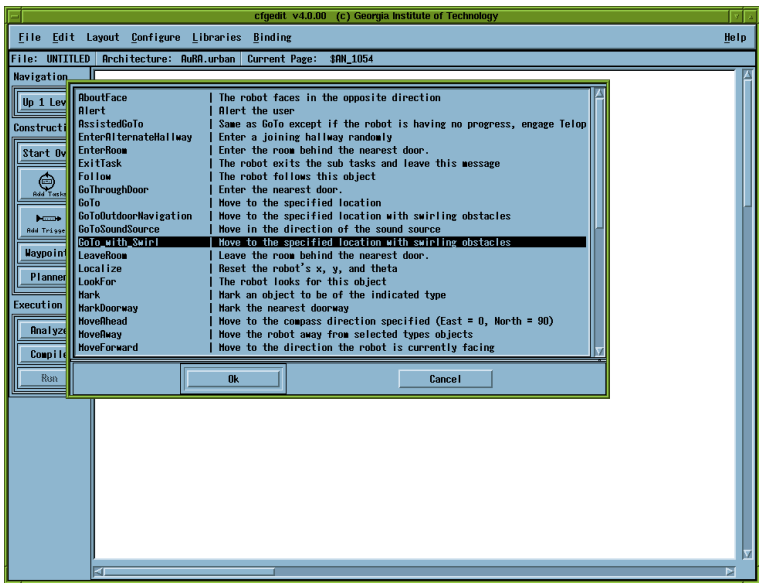

Figure 50: *CfgEdit* - the new state "GoTo_with_Swirl" created

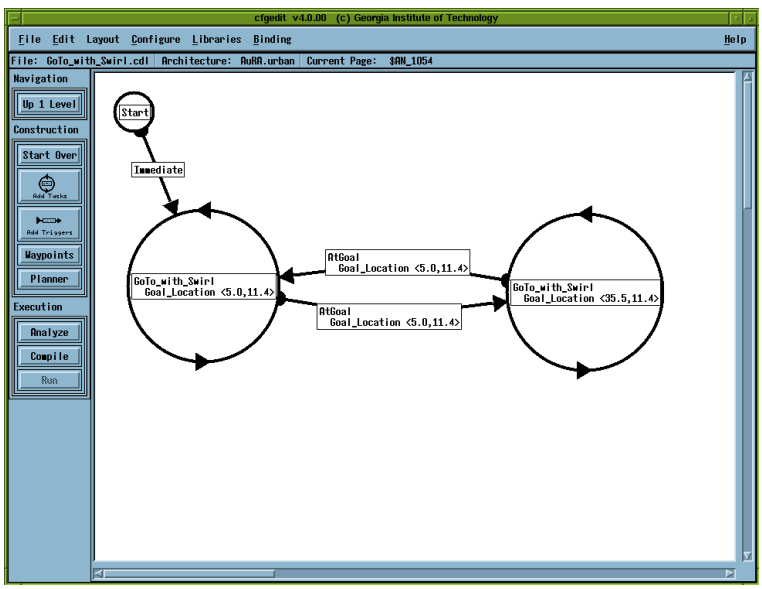

Figure 51: *CfgEdit* - a sample mission for the "GoTo_with_Swirl" state

The procedure for adding a new trigger is very similiar to adding a new state that described above. However, for the trigger, make sure that you choose the CNL code that been called from the trigger has "procedure bool" instead of "procedure Vector". Since it is not a vector, you do not make an assemblage

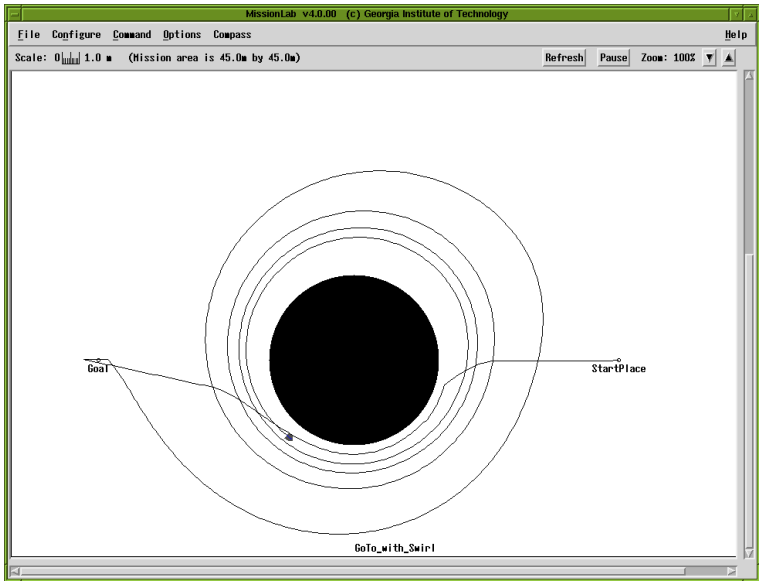

Figure 52: *mlab* - testing the "GoTo_with_Swirl" state

using the cooperative coordination operator (*COOP.cnl*), neither.

3.5 CDL (Configuration Description Language)

The configuration editor uses the Configuration Description Language (CDL) as its file representation. CDL is an agent-based programming language based on the Societal Agent theory, which presents a uniform view of all robot configuration components as agents. It uses a functional notation to support recursive construction of assemblages and named instantiation to support reusing components in multiple assemblages. Binding points are used in the configuration to denote connections to hardware devices. An explicit binding step is used to denote which sensors, actuators and robots are to be attached to the binding points. Code generators have been created which output CNL code for the AuRA architecture and SAUSAGES code for the UGV architecture. An example for a CDL representation of a configuration is shown below. Note that as the robot binding point *RobotBP* defines the configuration. The notation used to name the vehicle binding point is *instance_name*:*definition_name*, which specifies that this instance of *definition_name* is to be called *instance_name*. The parameter *bound_to* is used to note the binding of robot *stimpy*, an instance of a MRV2 Denning robot. The FSA is specified as defining the robot. The states appear as instances of the *society* parameter and the transitions appear as the list of rules. A named instance of an agent used multiple places is created with the *instAgent* command (or *instOp* for operators). Notice that the wander skill is specified using this method since it is used in both the *look_for_can* and *look_for_basket* states in the FSA.

```
bindArch AuRA.urban;
instAgent drop_can from DETECT_LOST_CAN();
instAgent Denning_ultras from ultras:ULTRASONICS();

instOp Wander from COOP(
   weight[A] = {1.0},
   weight[B] = {0.8},
   weight[C] = {1.0},
   members[A] = noise:NOISE(
      persistence = {5.0},
      robot_heading = robot_heading:GET_HEADING(
         cur_pos = denning_encoders:xyt:SHAFTENCODERS())),
   members[B] = probe:PROBE(
      sphere = {2.0},
      safety_margin = {0.5},
      readings = Denning_ultras),
   members[C] = avoid_obs:AVOID_STATIC_OBSTACLES(
      sphere = {1.0},
      safety_margin = {0.5},
      readings = Denning_ultras));

RobotBP:vehicle(
   bound_to = Stimpy:MRV2(
      trashbot_FSA:FSA(
         society[Start] = ,
         society[Look_for_can] = [ Wander ],
         society[Pick_up_can] = ,
         society[Look_for_basket] = [ Wander ],
         society[Put_can] = ,

         rules[Start] = if [true] goto Look_for_can,
         rules[Look_for_can] = if [detect_can:DETECT_CAN()] goto Pick_up_can,
         rules[Pick_up_can] = if [have_can:DETECT_HAVE_CAN()] goto Look_for_basket,
         rules[Look_for_basket] = if [detect_basket:DETECT_BASKET()] goto Put_can,
         rules[Put_can] = if [ true] goto Look_for_can,
         rules[Pick_up_can] = if [drop_can] goto Look_for_can,
         rules[Look_for_basket] = if [drop_can] goto Pick_up_can)))
```

The exact specification of the Configuration Description Language is defined below using grammar productions. Keywords printed in bold face such as **defArch** are terminal symbols. Punctuation and grouping characters such as "() [];" are also terminal symbols. The symbol ϵ denotes an empty production, that is, one that can match nothing. The remainder are nonterminals which are defined on the left side of a production. The main objects in CDL are the agents, coordination operators, binding points, and hardware devices. The remainder of the productions deal with architecture and binding related issues.

```
Start           | Start DefineClass
                | Start DefineBP
                | Start InstAgent
                | Start InstGroup
                | Start InstSorA
                | Start DefineRobot
                | Start DefineOp
                | Start DefineArch
                | Start DefineType
                | Start InstCoord
                | Start InstBP
                | Start InstRobot
                | Start BindArch
                | Start DefineSandA
                | Start Agent
                | DefineClass
                | DefineBP
                | InstAgent
                | InstGroup
                | InstSorA
                | DefineRobot
                | DefineOp
                | DefineArch
                | DefineType
                | InstCoord
                | InstBP
                | InstRobot
                | BindArch
                | DefineSandA
                | Agent

Agent           | AGENT_NAME
                | ROBOT_NAME
                | GROUP_NAME
                | BP_NAME
                | RefRobot
                | RefGroup
                | RefCoord
                | RefSorA
                | RefBP
                | ClsRef
                | COORD_NAME

DefineArch      | defArch NAME ;

BindArch        | bindArch ARCH_NAME ;
                | bindArch NAME ;

TypeSetArch     | defType [ ARCH_NAME ]
                | defType [ NAME ]
                | defType

DefineType      | TypeSetArch NAME ;
                | TypeSetArch TYPE_NAME ;

DefineOp        | OpSetArch TYPE_NAME NAME FSA_STYLE EndDefop
                | OpSetArch TYPE_NAME NAME SELECT_STYLE EndDefop

EndDefop        | ( ParmDef ) ;
                | ( ) ;

OpSetArch       | defOp [ ARCH_NAME ]
                | defOp


DefineRobot     | RobotSetArch binds BP_CLASS NAME ( BPList ) ;
                | RobotSetArch binds BP_CLASS NAME ( ) ;

RobotSetArch    | defRobot [ ARCH_NAME ]
                | defRobot
```

```
BPList          | BPList , BPparmdef
                | BPparmdef

BPparmdef       | sensor INLINE_NAME SENSOR_CLASS
                | actuator INLINE_NAME ACTUATOR_CLASS

DefineBP        | StartBP ( ParmDef ) ;
                | StartBP ( ) ;

StartBP         | defIBP TYPE_NAME NAME
                | defIBP NAME NAME
                | defOBP TYPE_NAME NAME
                | defOBP NAME NAME
                | defRBP NAME

SensorSetArch   | defSensor [ ARCH_NAME ]
                | defSensor

StartSensor     | SensorSetArch binds BP_CLASS TYPE_NAME NAME
                | SensorSetArch binds BP_CLASS NAME NAME

ActuatorSetArch | defActuator [ ARCH_NAME ]
                | defActuator

StartActuator   | ActuatorSetArch binds BP_CLASS TYPE_NAME NAME
                | ActuatorSetArch binds BP_CLASS TYPE_NAME ACTUATOR_CLASS
                | ActuatorSetArch binds BP_CLASS NAME

SandA           | StartSensor
                | StartActuator

DefineSandA     | SandA ( ParmDef ) ;
                | SandA ( ) ;

DefineClass     | StartClass ( ParmDef ) ;
                | StartClass ( ) ;

AgentSetArch    | defAgent [ ARCH_NAME ]
                | defAgent

StartClass      | AgentSetArch TYPE_NAME NAME
                | AgentSetArch TYPE_NAME AGENT_CLASS

ParmDef         | ParmDef , AParm
                | AParm

AParm           | TYPE_NAME NAME
                | const TYPE_NAME NAME
                | list TYPE_NAME NAME
                | list const TYPE_NAME NAME

SorA            | ACTUATOR_NAME
                | SENSOR_NAME

Loc             | ¡ NUMBER , NUMBER ¿
                | ϵ

InstAgent       | instAgent Loc NAME from AGENT_CLASS ParmSet ;
                | instAgent Loc NAME from SorA ParmSet ;
                | instAgent Loc NAME from StartSorARef ParmSet ;
                | instAgent Loc NAME from NAME ParmSet ;

ParmSet         | ( Glist )
                | ( )

Glist           | Link
                | Glist , Link

RobotParms      | ( RobotLinks )
                | ( )

RobotLink       | Agent
                | Link

RobotLinks      | RobotLink
                | RobotLinks , RobotLink

Link            | LHS = Agent
                | LHS = UP
```

```
                | LHS = PU_INITIALIZER
                | LHS = Rule
                | LHS = INITIALIZER
                | LHS =
                | LHS = ( RobotLinks )

LHS             | PARM_NAME Loc
                | PARM_NAME [ INDEX_NAME ] Loc
                | PARM_NAME [ NAME ] Loc
                | PARM_HEADER [ NAME ] Loc
                | PARM_HEADER [ INDEX_NAME ] Loc
                | PARM_HEADER
                | PU_PARM_NAME Loc

MaybeAgent      | Agent
                | ϵ

Rule            | if MaybeAgent goto INDEX_NAME
                | if MaybeAgent goto NAME

MaybeName       | INLINE_NAME
                | ϵ

StartClsRef     | MaybeName AGENT_CLASS

ClsRef          | StartClsRef ParmSet Loc

InstRobot       | StartRobotInst RobotParms

StartRobotInst  | instRobot Loc NAME from ROBOT_CLASS

InstCoord       | StartCoordInst ParmSet ;

StartCoordInst  | instOp Loc NAME from COORD_CLASS

RefRobot        | StartRefRobot RobotParms Loc

StartRefRobot   | MaybeName ROBOT_CLASS

RefCoord        | StartCoordRef ParmSet Loc

StartCoordRef   | MaybeName COORD_CLASS

RefSorA         | StartSorARef ParmSet Loc

SorAclass       | ACTUATOR_CLASS
                | SENSOR_CLASS

StartSorARef    | MaybeName SorA Loc
                | INLINE_NAME INLINE_NAME ACTUATOR_CLASS Loc
                | INLINE_NAME INLINE_NAME SENSOR_CLASS Loc
                | MaybeName SorAclass Loc

StartSorAInst   | instActuator Loc NAME from ACTUATOR_CLASS
                | instSensor Loc NAME from SENSOR_CLASS

InstSorA        | StartSorAInst ParmSet ;

RefBP           | MaybeName BP_CLASS ParmSet Loc

InstBP          | instBP Loc NAME from BP_CLASS ParmSet ;

RefGroup        | [ AgentList ] Loc

InstGroup       | instGroup Loc NAME from [ AgentList ] ;

LinkorAgent     | Agent
                | Link

AgentList       | LinkorAgent
                | AgentList , LG
```

Consider the following example CDL configuration for a robot that simply moves forward until terminated by the operator. The first line binds the configuration to the AuRA architecture. The next line defines the vehicle binding point. This binding point is bound to a MRV2 robot named "stimpy" in the next line. The agent creating movement for the robot is an instance of the move_to_goal behavior named "mtg".

Move_to_goal has two parameters, the relative location of the goal, and the maximum it must be to the goal before declaring success. In this case, the relative goal location is hard coded at 10 meters straight ahead. This will act as a carrot on a stick, keeping the robot moving north until it is terminated by the operator.

```
bindArch AuRA.urban;
move_forward:vehicle(
   bound_to = stimpy:MRV2(
      mtg:MOVE_TO_GOAL(
         goal_rel_loc<0,0> = {10,0},
         success_radius<0,0> = {1.0} )<150,95>
   )<317,69>
)<214,64>
```

The Configuration Description Language is a powerful tool, aiding users in creating recursive specifications of multiagent configurations. The uniform representation of components at all levels of abstraction as agents simplifies object exchange and reuse. CDL is usable as a text-based language, but the real power comes from using the Configuration Editor to graphically create and maintain configuration specified in CDL.

3.6 CNL (Configuration Network Language)

When the configuration is bound to the AuRA architecture, the CDL compiler generates a Configuration Network Language (CNL) specification of the configuration as its output. CNL is a hybrid dataflow language[6] using large grain parallelism where the atomic units are arbitrary C++ functions. CNL adds dataflow extensions to C++ which eliminate the need for users to include communication code. A compiled extension to C++ was chosen to allow verification and meaningful error messages to assist casual C++ programmers in constructing behaviors. The separation of the code generator from the CDL compiler permits incremental development and testing of the design tools as well as simplifying retargeting.

The use of communicating processing elements is similar to the Robot Schemas (RS)[7] architecture which is based on the port automata model. The major differences are that RS uses synchronous communication while CNL is asynchronous to support multiprocessing; and RS is an abstract language while a CNL compiler has been developed. Both use the notion of functions using data arriving at input ports to compute an output value, which is then available for use as inputs in other functions.

CNL provides a separation between procedure implementations and specification of the dataflow graph's topography. CNL encourages this separation by allowing the procedures to be coded, tested and archived in standard Unix libraries. Instances of these procedures are specified in a separate step, thereby creating the dataflow network. The output of the CNL compiler is a C++ file created by merging the user's procedures and the compiler's data movement code specified by the node definitions. This output file can be compiled using any suitable ANSI C++ compiler targeted for the desired machine architecture. Using a standard programming language for the procedures simplifies converting existing code to CNL. The CNL language is documented in the Configuration Network Language User manual, included with this *MissionLab* package.

The code in Figure 53 is an example of the CNL procedure definition for the *avoid_static_obstacles* behavior used in the trash collecting (*trashbot*) configuration. There are four places that C++ code can occur in CNL: Bracketed by an `init/iend` pair, bracketed by a `once/header` pair within a procedure definition, bracketed by a `header/body` pair within a procedure definition, or bracketed by a `body/pend` pair within a procedure definition. Code within `init` blocks is not specific to a particular procedure. Code within `once` blocks is emitted before the body loop and therefore executes once on instantiation. Code within the `header` block is executed once each time the thread gains scope. For example, a node underneath a state in an FSA gains scope when that state becomes active and looses it when a new state takes over. Code within `body` blocks is surrounded with a while loop and executes once for each new set of input parameters. The predefined output parameter for the procedure is named *output*.

A CNL configuration can be viewed as a directed graph, where nodes are threads of execution and edges indicate dataflow connections between producer nodes and consumer nodes. For example, both Figures 54 and 55 present a CNL representation of the *trashbot* configuration: Figure 54 shows the procedure generated to implement the FSA specified by the user, and Figure 55 shows the nodes created to implement the configuration in CNL. Each node in the configuration is an instantiation of a C++ function, forked as a lightweight thread using the C-Threads package[9] developed at Georgia Tech. UNIX processes are examples of heavyweight threads which use the operating system for scheduling. Lightweight threads are generally non-preemptive and scheduled by code linked into the user's program. All lightweight threads execute in the same address space and can share global variables. The advantage of lightweight threads is that a task switch takes place *much* faster than between heavyweight threads, allowing large scale parallelism. Current robot configurations are using around 50 threads with little overhead, while that many UNIX processes is not feasible. Code for thread control and communication synchronization is explicitly generated by the CNL compiler and need not be specified by the user.

```
procedure Vector AVOID_STATIC_OBSTACLES with
    double sphere;
    double safety_margin;
    obs_array readings;
once
header
body
    VECTOR_CLEAR(output);

    for(int i=0; i<readings.size; i++)
    {
        double c_to_c_dist = len_2d(readings.val[i].center);
        double radius = readings.val[i].r + safety_margin;
        double mag = 0;

        if (c_to_c_dist ≤ radius )
        {
            // if within safety margin generate big vector
            mag = INFINITY;
        }
        else if (c_to_c_dist ≤ radius + sphere )
        {
            // generate fraction (0...1) how far are in linear zone.
            mag = (sphere - (c_to_c_dist - radius)) / sphere;
        }
        // otherwise, outside obstacle's sphere of influence, so ignore it

        if (mag ≠ 0)
        {
            // create a unit vector along the direction of repulsion
            Vector repuls;
            repuls.x = -readings.val[i].center.x;
            repuls.y = -readings.val[i].center.y;
            unit_2d(repuls);

            // Set its strength to the magnitude selected
            mult_2d(repuls, mag);

            // Add it to the running sum
            plus_2d(output, repuls);
        }
    }
pend
```

Figure 53: CNL code for avoid static obstacles behavior

```
#include "cnl.inc"
modulename = Stimpy;

procedure Vector trashbot_FSA_proc with
  Vector  agent_Look_for_basket;
  Vector  agent_Put_can;
  Vector  agent_Look_for_can;
  Vector  agent_Start;
  Vector  agent_Pick_up_can;
  boolean detect_basket;
  boolean drop_can;
  boolean detect_can;
  boolean have_can;
header
  const int Put_can = 4;
  const int Look_for_basket = 3;
  const int Start = 0;
  const int Look_for_can = 1;
  const int Pick_up_can = 2;
  int state = Start;
body
  switch(state)
  {
    case Look_for_basket:
      if(detect_basket) state = Put_can;
      else if(drop_can) state = Pick_up_can;
      output = agent_Look_for_basket;
      break;
    case Put_can:
      state = Look_for_can;
      output = agent_Put_can;
      break;
    case Look_for_can:
      if(detect_can) state = Pick_up_can;
      output = agent_Look_for_can;
      break;
    case Start:
      state = Look_for_can;
      output = agent_Start;
      break;
    case Pick_up_can:
      if(have_can) state = Look_for_basket;
      else if(drop_can) state = Look_for_can;
      output = agent_Pick_up_can;
      break;
  }
pend
```

Figure 54: The CNL procedure definition generated to implement the *trashbot* configuration

```
node trashbot_FSA is trashbot_FSA_proc with
  agent_Look_for_basket = Wander;
  agent_Put_can = NULL;
  agent_Look_for_can = Wander;
  agent_Start = NULL;
  agent_Pick_up_can = NULL;
  detect_basket = trig_detect_basket;
  drop_can = trig_drop_can;
  detect_can = trig_detect_can;
  have_can = trig_have_can;
nend

node trig_detect_basket is DETECT_BASKET with nend

node trig_drop_can is DROP_CAN with nend

node trig_detect_can is DETECT_CAN with nend

node trig_have_can is HAVE_CAN with nend

node Wander is COOP with
  weight = {1.0}; weight = {0.8}; weight = {1.0};
  members = noise; members = probe; members = avoid_obs;
nend

node noise is NOISE with
  persistence = {5.0};
  robot_heading = robot_heading;
nend

node probe is PROBE with
  sphere = {2.0};
  safety_margin = {0.5};
  readings = Denning_ultras;
nend

node avoid_obs is AVOID_STATIC_OBSTACLES with
  sphere = {1.0};
  safety_margin = {0.5};
  readings = Denning_ultras;
nend

node robot_heading is GET_HEADING with
  cur_pos = xyt;
nend

node Denning_ultras is ultras with nend

node xyt is SHAFTENCODERS with nend
```

Figure 55: The CNL nodes generated to implement the *trashbot* configuration in the AuRA architecture. Notice that the `trashbot_FSA_proc` is instantiated as a node.

3.7 CMDL (Command Description Language)

The command description file, or the CMDL file, contains the information necessary to set up a scenario and execute a series of commands. The structure and syntax of the command description file is explained in this section.

The command description file is organized into two parts (1) the background information part and (2) a list of commands to be executed. The basic syntax of the file is described below. White space (such as spaces, tabs, and blank lines) is ignored. Comments can be included on any line by using two dashes in a row; the rest of the line will be ignored.

In the following descriptions, items in italics would be replaced by appropriate values from the user.

3.7.1 Mission background information part

The first part of the file is a description of mission background information. It consists of a series of entries which define this information. The currently implemented entries are:

- **Mission name:** The user can specify the mission name with this entry. It has the following format:

  `MISSION NAME "`*the user's name for the mission*`"`

- **Overlay:** This entry allows the user to indicate which file to read to load the overlay information. It has the following format:

  `OVERLAY "`*filename*`"`

  This command should be placed early in the file, since it may override some effects of the following commands.

- **Starting point:** Using this entry, the user specify a named starting position. This definition overrides any starting point specified in the overlay file (assuming they both have the same name). It has the following format:

  `SP` *Name x y*

  where x and y are the eastward and northward coordinates of the starting point (with respect any origin specified in any previously loaded overlay file).

- **Robot Definition:** The user can define new robots using this command. The format of the command is:

  `NEW-ROBOT` *Name executable-name* [*"Color"* [*hostname*] [($key_1 = value_1$, $key_2 = value_2$, ...)]]

  where *Name* is the name of the robots to be used in subsequent unit descriptions, and *executable-name* is the filename of the robot executable program. The parameter *"Color" is any legal X windows color name, hostname is the optional name of a host on which to run the robot program, and the optional list of key/value pairs. The key/value pairs are parameters to send to the robot to customize its behavior. The values should be quoted if they are strings with internal white space. All of this key/value parameter data is sent to the robot program's internal database after it has started executing. (Note: If you try to set a value and it does not seem to have the desired effect, double-check the spelling of the key and make sure it is correct.) It is then up to the robot program to use the parameter data.*

  There is one robot defined by default, `Robot`*, which cannot be redefined. It is equivalent to the robot definition:*

  ```
  NEW-ROBOT robot "robot"
  ```

  In the program "`robot`*" included in this release*[7]*, numerous parameters can be given which control the operation of the robot's motor behaviors. See Table 1 for details. A detailed description of motor*

KEYWORD	VALUE DESCRIPTION	Default
avoid_obstacle_sphere	Maximum distance at which the `avoid_obstacle` behavior begins to react to obstacles (in meters).	30.0
avoid_obstacle_safety_margin	Distance at which inter-robot collisions are assumed to occur (in meters).	5.0
base_velocity	Adjusts the overall speed of the robot (in meters/sec).	5.0
cautious_velocity	The top speed of the robot when in cautious mode (in meters/sec).	7.0
cautious_mode	Controls whether `cautious_velocity` is used in place of `max_velocity`. Value should be `YES` or `NO`.	`NO`
detect_obs_range	Maximum range at which the detectors can sense obstacles (in meters).	30
formation_spacing	Characteristic distance between robots in a formation (in meters).	5.0
formation_saturation_length	Distance (in meters) from the nominal formation position beyond which the robot's maintain-formation magnitude is set at maximum.	20.0
formation_dead_zone_radius	Distance (in meters) from the nominal formation position at which no further formation position correction is applied.	5.0
formation_slop	This is how far out of position the robot may be, yet still be considered in formation (in meters).	10.0
formation_default_trigger	Distance (in meters) from the goal at which a default heading is used for the formation reference instead of the goal heading.	100.0
max_velocity	Normal top speed of the robot (in meters/sec).	7.0
move_to_goal_success_radius	How close the robot needs to be to the goal before declaring success (in meters).	5.0
navigation_avoid_obstacle_gain	Weight applied to the `avoid_obstacle` behavior in navigate mode.	1.5
navigation_avoid_robot_gain	Weight applied to the avoid_robot behavior in navigate mode.	2.0
navigation_avoid_robot_min_range	If the robot is within this range of another robot (in meters), the repulsion vector from it is set at a maximum value.	15.0
navigation_avoid_robot_sphere	Other robots beyond this range (in meters) are not considered by the avoid robot schema.	30.0
navigation_formation_gain	Weight applied to the formation behavior in navigate mode.	1.0
navigation_move_to_goal_gain	Weight applied to the move_to_goal behavior in navigate mode.	0.8
navigation_noise_gain	Weight applied to the noise behavior in navigate mode.	0.1
navigation_success_radius	Distance the robot can stray from the desired formation position before a correcting force is applied (in meters).	10.0
navigation_swirl_gain	Weight applied to the swirl behavior in navigate mode.	0.0
navigation_teleopt_gain	Weight applied to the teleoperation behavior in navigate mode.	1.0
occupy_avoid_obstacle_gain	Weight applied to the avoid_obstacle behavior in occupy mode.	1.5
occupy_avoid_robot_gain	Weight applied to the avoid_robot behavior in occupy mode.	2.0
occupy_avoid_robot_sphere	Other robots beyond this range (in meters) are not considered by the avoid robot schema in occupy mode.	30.0
occupy_avoid_robot_min_range	If the robot is within this range of another robot (in meters), the repulsion vector from it is set at a maximum value when in occupy mode.	15.0
swirl_sphere	The maximum distance that obstacles are reacted to by the swirl behavior (in meters).	1.0
swirl_safety_margin	The minimum distance that obstacles must be from the robot to be included in the swirl computation (in meters).	0.1
swirl_open_space	The minimum distance that must be clear in a particular direction before it can be chosen as the heading by the swirl behavior (in meters).	0.1
swirl_open_sphere	The maximum distance (in meters) that obstacles are reacted to for use in determining the heading by the swirl behavior.	0.1

Table 1: Robot definition parameter keyword descriptions

schema-based navigation and associated parameters is given in [2]. In addition, the several keywords can be set to select the type of device to control. See Table 2. The keywords described in Table 3 are

KEYWORD	VALUE DESCRIPTION	Default
robot_type	Selects the type of robot to control. Supported values are: PIONEERAT, URBAN, HOLONOMIC, DRV1, MRV2, MRV3, HUMMER, and UNICYCLE_HUMMER.	HOLONOMIC
run_type	Determines if the control program will drive a simulated robot or actual hardware. (Controlling actual hardware will obviously not work if you don't have any hardware. If you do have actual hardware and want to control it, contact us at Georgia Tech for assistance.) Supported values are: SIMULATION, and REAL.	SIMULATION
robot_color	The robot's color in a simulation.	blue

Table 2: Robot definition parameter device type selection keyword descriptions

only relevant if `run_type` *is REAL and the hardware is set up appropriately.*

For the version running on linux, there is a unfixed memory handling bug, which causes crash if color or hostname parameter is missing. So please specify the full list in those cases.

KEYWORD	VALUE DESCRIPTION	Default
tty_num	Select the serial port to use to talk to the robot. (The value should be an integer such as 0 or 1 and is used to form a device name such as /dev/tty0 or /dev/tty1.)	0
timeout	Select the packet timeout delay in 1/10ths of a second used when talking to the robot. (The value should be an integer such as 10 or 15.)	40 (4 seconds)
use_lawn	Is the serial port connected to the robot using LAWN radio modems? (The value should be either `YES` or `NO`.)	`NO`
lawn_name	If use_lawn is `YES`, this specifies the name of the LAWN radio mounted on the robot. (The value should be a text string.)	ROBOT
echo_tty	For debugging purposes, the device driver can be made to echo all robot communications to stdout. (The value should be either `YES` or `NO`.)	`NO`
log_tty	For debugging purposes, the device driver can be made to log all robot communications to a file named "tty.log". (The value should be either `YES` or `NO`.)	`NO`
draw_obstacles	Only valid when running a real robot. It causes the robot to report obstacle sensor readings back the simulation where they are drawn as filled circles. (The value should be either `YES` or `NO`.)	`YES`
lurch_mode	Only valid when running a real robot. It causes the robot to halt after each control loop cycle. Normally the controller commands velocities to the robot, allowing the robot to continue on between control loops. When in lurch mode, the robot is commanded to move to a series of discreet destinations. This is a safer mode of execution when there is a chance the control loop might die, since the robot will stop after the end of a move instead of rolling on with nothing in control. (The value should be either `YES` or `NO`.)	`NO`

Table 3: Robot definition parameter keywords for REAL robot execution

- **Unit description:** *The units to be used in the mission are described in this entry. This entry has several permissible formats. A simple one is:*

[7] The manually-coded-type-robot described in Section 3.3. It does not apply for the *CfgEdit*-type robot.

UNIT <*Name*> R_1 R_2 ... R_n

where R_i *is a robot identifier such as* ROBOT *for a generic robot. This unit can be referred to using the specified name Name. (Note the use of angle brackets* < *and* > *around the unit name. The angle brackets are a necessary part of the syntax.) Other robot identifiers may be defined with the NEW-ROBOT command described above. Units are often more complicated. Therefore, the entry can have a more complex, recursive structure. To specify a unit with two named subunits, use the following syntax:*

UNIT <*Name*> (<*Name-1*> R_1 R_2 ... R_n) (<*Name-2*> R_1 R_2 ... R_n)

where R_i *can be a robot name, as above, or the embedded definition of another unit. This can be repeated recursively, as necessary.*

The main point to understand is that each unit or subunit must have a name if commands are to be given to it.

- **Setting system parameters:** *Various system parameters can be set which affect the operation of the system. Each of the possible commands will be listed here with a brief explanation. A number of these commands take an optional boolean argument* ON/OFF*. If neither* ON *nor* OFF *is specified,* ON *is assumed. (Boolean arguments can also use* TRUE/FALSE *or* YES/NO *as equivalents to* ON/OFF*.)*

  - SET SEED *seed*

    Set the seed for the random number generator that is used to generate the obstacles randomly. The seed should be an integer number.

  - SET SHOW-TRAILS *[ON/OFF]*

    If set ON*, the robots leave trails as they move.*

  - SET HIGHLIGHT-REPELLING-OBSTACLES *[ON/OFF]*

    If set ON*, when a robot is close enough to an obstacle for it to be repelled by it, a circle will be drawn around the obstacle outlining its zone of influence. If the robot gets closer than the safety margin, a red circle will be drawn at the diameter of the safety margin.*

  - SET SHOW-MOVEMENT-VECTORS *[ON/OFF]*

    If set ON*, the a red line will be drawn in each motion cycle indicating the direction (and magnitude) of the motion that the robot desires to complete.*

  - SET DEBUG-ROBOTS *[ON/OFF]*

    If set ON*, the robots will print diagnostic information as they run. This information will probably be most useful for the software developers.*

  - SET DEBUG-SIMULATOR *[ON/OFF]*

    If set ON*, the console will print diagnostic information as commands are executed. This information will probably be most useful for the software developers.*

  - SET DEBUG-SCHEDULER *[ON/OFF]*

    If set ON*, the C-Threads scheduler will print diagnostic information as it operates. This information will probably be most useful for the software developers.*

  - SET ROBOT-LENGTH *length*

    This allows the user to set the value of length of the robot. If the robots are scaled (see SET SCALE-ROBOTS *below), then this length value is in meters. If not, the value length is the length of the robot in pixels. This command should be placed after the overlay file command since the* MISSION-AREA *command in the overlay file will override its effect. Note that this only affects the display and does not affect the size of the robot for various computations such as avoiding obstacles.*

  - SET SCALE-ROBOTS *[ON/OFF]*

    If set ON*, the robots are scaled (magnified or shrunk) with the map display.*

- `SET ZOOM-FACTOR` *zoom*
  where zoom is the desired display zoom factor, in percent. The default is 100%. The minimum value is 10% and the maximum value is 400%. Values beyond that range can be achieved by modifying the values in the `MISSION-AREA` *command in the overlay file.*
- `SET OBSTACLE-COVERAGE` *number*
  This allows the user to set the desired value of the obstacle coverage, in percent.
- `SET MIN-OBSTACLE-RADIUS` *number*
  This allows the user to set the desired minimum obstacle radius when obstacles are generated randomly.
- `SET MAX-OBSTACLE-RADIUS` *number*
  This allows the user to set the desired maximum obstacle radius when obstacles are generated randomly.
- `SET CYCLE-DURATION` *number*
  This allows the user to set the number of seconds each sense-compute-move cycle is supposed to take, in simulation.

- **Create Obstacles:** *The following directive can be used to generate the field of non-overlapping obstacles randomly.*

  `CREATE-OBSTACLES`

  The following command creates one obstacle at a specified position:

  `OBSTACLE` *x y diameter*

  where the position, x and y, and diameter are all in meters. No checking is done to make sure that these obstacles do not overlap other obstacles or robots.

- **Print information:** *Several types of information can be printed by including the following commands. These commands are primarily for diagnostic use.*
  - `PRINT CONSOLE-DB`
    This causes the information in the console database to be printed out.
  - `PRINT ROBOT-INFO`
    This causes the information about the defined robots to be printed out.

3.7.2 Mission Command List Part

The rest of the command description file is a list of steps (composed of several commands) to be executed. This part of the file starts with the phrase:

```
COMMAND LIST:
```

This ends the mission background information part of the file. The rest of the file is a series of descriptions of each step. Each step description has the form:

Step-name. `UNIT` *Unit-name CMD additional-information...*

where *Step-name* is usually a step number (which must end in a period), *Unit-name* is the unit which is to receive this command, *CMD* is a command tag which identifies what command is involved (`START`, `MOVETO`, `TELEOPERATE`, `FOLLOW`, `OCCUPY`, or `STOP`), and the rest of the information on the line varies depending on the type of command. The various command tags (*CMD*) are given in the following sections. The case of the tags is ignored.

A step can be composed of several commands which are to be executed at the same time. To add additional commands to the step, use the token **AND** between them. For example, a step with two commands would have the following format:

Step-name. **UNIT** *Unit-name CMD additional-information...* AND
UNIT *Unit-name CMD additional-information...*

Additional commands can be appended using further **AND** tokens.

A description of the format for each type of command[8] follows:

- **Start command:** This command tells the system to initialize this unit. It has a simple format:

  UNIT *Unit-name* **START** *Start-name* [*dx dy*]

  Where *Start-name* indicates the name of the place where the robots are to be initially located. The optional *dx* and *dy* are offset values for the locations of successive robots in the unit (east and north, respectively); they can be used to keep robots from being placed on top of each other.

- **Moveto command:** This command tells the unit to move to some specified position. It has the following format:

  UNIT *Unit-name* **MOVETO** *Destination-name* [**FORMATION**] [*FN*] [*MT*] [*PLS*] [**SPEED** = *number*]

  where *Destination-name* refers to a previously defined destination control measure. If the destination is a line or a region, its centroid is computed and used. The terms in square brackets are optional and can be given in any order. The term *FN* is a formation name which is one of **COLUMN**, **LINE**, **DIAMOND**, or **WEDGE**. The default formation is no formation. The term **MT** is a movement technique name (**TRAVELING**, **TRAVELING-OVERWATCH**, or **BOUNDING-OVERWATCH**). The default movement technique is **TRAVELING**. In the current release, traveling overwatch and bounding overwatch are not implemented. The optional speed is in meters per second.

  The final part, *PLS*, is an optional phase line specification. It has several possible forms:

  PHASE-LINE *mm-dd-yy hh:mm:ss*

  In this form, the desired arrival date and time are specified. The order of the date and the time can be reversed. The seconds (and the preceding colon) can be omitted from any time specifications. If the date is omitted, the time is assumed to be for the current day:

  PHASE-LINE *hh:mm:ss*

  If a "+" is put in front of a time, it is assumed to be relative to the current time.

  PHASE-LINE +*hh:mm:ss*

  If a number is given with no colon, it assumed to be in minutes:

  PHASE-LINE +*number*

  Although the phase line specification can be given in command lists, currently it is ignored in command execution.

- **Teleoperate command:** This command puts the unit under the control of the teleoperation interface. It has the following format:

  UNIT *Unit-name* **TELEOPERATE** *Destination-name* [**FORMATION**] [*FN*] [**SPEED** = *number*]

  The destination-name is currently ignored. The other components are the same as in the **MOVETO** command. When the user has moved the unit as desired, pressing the [**End Teleoperation**] button on the teleoperation interfaces causes this command to be completed. One current limitation is that only one unit can be controlled with this command per step.

[8] Except "Start command" which can be used for the *CfgEdit*-type robot, these commands only apply for the manually-coded-type-robot described in Section 3.3.

- **Follow command:** This command tells the unit to follow some line feature. It has the following format:

  `UNIT` *Unit-name* `FOLLOW` *Destination-name* [`FORMATION`] [*FN*] [*MT*] [it PLS] [`SPEED` = *number*]

  In this case, the destination must be a line. The other components are the same as in the `MOVETO` command. NOTE: This command is not implemented yet in the robot executable.

- **Occupy command:** This command tells the unit to occupy a position until some termination condition is satisfied. It has the following form:

  `UNIT` *Unit-name* `OCCUPY` *Destination-name* [`FORMATION`] [*FN*] [*UC*]

  Where the *Destination-name* refers to the place to occupy. The formation terms are the same as in the `MOVETO` command. The final part is the optional termination condition ("Until Clause"). By default, when the robots complete an occupy command (get into formation at the specified location), the console prompts the user to proceed with a proceed dialog box. See Figure 56. When the user

Figure 56: Proceed dialog box

  presses the `Proceed` button, the commands continue executing from that point. It may be convenient to specify a timeout for how long to wait for the user to press the `Proceed` button. The form of the "until clause" `UC` is:

  `UNTIL TIMEOUT` *time*

  The value *time* is the amount of time to wait before proceeding without confirmation. If *time* is an integer number, it is assumed to be the number of seconds to wait. It can also be specified in terms of hours and minutes in the format `mm:ss` or `hh:mm:ss`. If a value of zero is specified, the execution proceeds without waiting or putting up a proceed dialog box. The user can also specify a set completion time by using the form:

  `UNTIL` *completion-time*

  Where *completion-time* is a time and date in the same format as specified in the phase line for the "Moveto" command. If the date is omitted, the time is assumed to be day the commands are loaded. When that time is reached, the execution proceeds.

- **Stop command:** This command tells the system to stop this unit. It has this form:

  `UNIT` *Unit-name* `STOP`

  This involves killing all the processes related to this unit. Therefore, no commands later in the script should refer to this unit or any units which share robots with this unit (since all these robots are now deactivated)—unless the script restarts the unit with a later `START` command. This often means that the `STOP` command is the last command in a script. This also means that the user should use care in executing commands manually, since using `STOP` manually while a script is running could produce a situation where the system attempts to execute a command for a robot is dead.

- **Quit command:** The command `QUIT` can be added to the list of commands. When it is executed, the program stops and exits. This is useful in automated execution of command scripts.

- Most of the `SET` and `PRINT` commands described earlier can be embedded in the command lists.

Notice that all the names of control measures in the command descriptions can be preceded by their tag (the *CM* values from Section 3.8) and a dash. This is allowed (and encouraged) to improve readability of the commands. For instance, assembly area `Alpha` can also be referred to as `AA-Alpha` in the command list.

3.7.3 Example Command Description File

An example of a command description file is given below. Notice that the file references an overlay file. Also notice the readable nature of the command language:

```
– THIS IS PART 1: the mission background information

MISSION NAME "Demo C simulation"

SCENARIO "Demo-C"

OVERLAY test.odl

SP Home 0 0

NEW-ROBOT Robot2 robot (base˙velocity=5)

UNIT ¡Wolf¿ (¡Wolf-1¿ ROBOT ROBOT) (¡Wolf-2¿ ROBOT2 ROBOT2 ROBOT2)

COMMAND LIST:      – THIS STARTS PART 2: the command list

 0. UNIT Wolf START SP-Home 10 0

 1. UNIT Wolf MOVETO AA-Alpha FORMATION diamond traveling-overwatch

1a. UNIT Wolf OCCUPY AA-Alpha FORMATION Column

 2. UNIT Wolf MOVETO ATK-Bravo FORMATION Column

 3. UNIT Wolf OCCUPY ATK-Bravo FORMATION Diamond UNTIL TIMEOUT 20

 4. UNIT Wolf MOVETO PP-Charlie FORMATION Column

 5. UNIT Wolf FOLLOW Gap-Delta FORMATION Column

 6. UNIT Wolf FOLLOW Axis-Foxtrot FORMATION Diamond Traveling-Overwatch
    PHASE-LINE PL-Gamma 06-10-94:23:10

 7. UNIT Wolf PASS-PHASE-LINE PL-Gamma

 8. UNIT Wolf-1 MOVETO BP-1 FORMATION Line Bounding-Overwatch AND
    UNIT Wolf-2 MOVETO BP-2 FORMATION Line Bounding-Overwatch

 9. UNIT Wolf-1 OCCUPY BP-1 FORMATION DIAMOND UNTIL TIMEOUT 10 AND
    UNIT Wolf-2 OCCUPY BP-2 FORMATION DIAMOND UNTIL TIMEOUT 10

10. UNIT Wolf-1 MOVETO OBJ-Zulu FORMATION Line Bounding-Overwatch AND
    UNIT Wolf-2 MOVETO OBJ-Zulu FORMATION Line Bounding-Overwatch

11. UNIT Wolf OCCUPY OBJ-Zulu FORMATION Diamond

12. UNIT Wolf STOP
```

3.8 ODL (Overlay Description Language)

The Overlay Description Language describes the environment for display by *mlab*. In order to read overlay information from files, it is necessary to use an overlay description file format. This section describes the structure and syntax of that format. The end of the section contains an illustration of a sample overlay file in Figure 57.

The file is organized into two parts (1) the scenario information part and (2) the control measure description part. The basic syntax of the file is described in the following sections. White space (spaces, tabs, and blank lines) is ignored. Comments can be included on any line by using two dashes in a row; the rest of the line is ignored.

NOTE: In the following descriptions, items in italics would be replaced by appropriate values from the user.

3.8.1 Scenario Information Part

The scenario information part is the first part of the file and includes any of the following items:

- **Scenario name:** This entry names the scenario for which this overlay data pertains. It has the following format:

  `SCENARIO "`*scenario name*`"`

- **Site name:** This entry indicates the site on which the overlay information is superimposed. This would might eventually include exact information about exactly what map should be accessed. It has the following format:

  `SITE "`*site name*`"`

- **Mission area:** This entry indicates the extent of of the mission area. The format for this command is:

  `MISSION-AREA` *width height*

  where *width* is the width (east-west) of the mission area and *height* is its height (north-south) — both in meters. This mission area is scaled appropriately to fit within the scrollable map area. The default mission area is 1km by 1km. Note that this command forces recomputation of a number of length-related values and should be including early in the overlay file.

- **origin location:** This entry indicates the origin for the overlay. In other words, the lower left hand corner of the map display area is considered to be at these coordinates. For convenience, all the coordinates in the following control measures are with respect to this origin. The format of the command is:

  `ORIGIN` X Y

  where X is value of the east-west origin and Y is the value of the north-south origin. In the following control measures, x increases in the eastward direction and y increases in the northward direction from this origin. If this statement is omitted, an origin of zero is assumed for x and y.

- **Zoom factor:** This entry allows the user to change the extent to which the map is magnified or shrunk. The format for the command is:

  `SET ZOOM-FACTOR` *zoom*

  Where *zoom* is the desired zoom factor, in percent. The default is 100%. The minimum value is 10% and the maximum value is 400%. Values beyond that range can be achieved by modifying the values in the `MISSION-AREA` command. This command should be placed after the `MISSION-AREA` command, if it is present.

3.8.2 Control Measure Description Part

This part of the file contains a description of all the control measures necessary for this scenario. This part of the file starts with the phrase:

```
CONTROL MEASURES:
```

This ends the scenario description part of the file. The rest of the file is a series of descriptions of the various control measures. Most of the descriptions have this general form:

CM Name coordinate-list

where *CM* is a tag specific to each type of the control measure, *Name* is the users unique name for that control measure, and *coordinate-list* is a list of the coordinates necessary to describe the control measure. Note that some of the control measures have variations on this syntax for optional arguments.

If the user does not want the name for the control measure to be printed on the display, they may append an asterisk at the end of the name. For instance, consider these two control measures:

CM George *coordinate-list* *CM* Bill* *coordinate-list*

Control measure for George would have its name printed on the display, whereas the control measure for Bill would not. Bill's graphics would still print, but the identifying name would not. This is useful in some situations to reduce the clutter on the screen. However, please name each control measure with an unique name. Currently, if there are redundant names for different control measures, some of them would not to be drawn correctly.

The various tags (*CM*) are given below. The case of the tags is irrelevant. Each user-supplied name (*Name*) must be unique. If the user wishes to supply a number for a name, it must be done in double quotes (eg, "1"). Descriptions of each type of control measure follow. All lengths and distances are in meters.

- **Assembly Area:** This entry indicates an assembly area. It has the format:

  `AA` *Name* x_1 y_1 x_2 y_2 ... x_n y_n [*diameter*]

  where the coordinates describe the polygon defining the region involved. The last point is assumed to be connected to the first. The optional value *diameter* (in meters, default=50m) can be specified if only the coordinate of the center of the position is given—then the position is assumed to be circular with the specified diameter. (If multiple coordinates are given for the border of the position, any specified diameter will be ignored.)

- **Attack position:** This entry indicates an attack position. It has the format:

  `ATK` *Name* x_1 y_1 x_2 y_2 ... x_n y_n [*diameter*]

  where the coordinates describe the polygon defining the region involved. The last point is assumed to be connected to the first. The optional value *diameter* (in meters, default=50m) can be specified if only the coordinate of the center of the position is given—then the position is assumed to be circular with the specified diameter. (If multiple coordinates are given for the border of the position, any specified diameter will be ignored.)

- **Axis:** This entry indicates an axis of advance. It has the format:

  `Axis` *Name* x_1 y_1 x_2 y_2 ... x_n y_n [*width*]

  where the coordinates describe the center line of the axis. The optional final value is the width of the axis in meters; it defaults to 100m if unspecified.

- **Battle position:** This entry indicates a battle position. It has the format:

  `BP` *Name* x_1 y_1 x_2 y_2 ... x_n y_n [*diameter*]

  where the coordinates describe the polygon defining the region involved. The last point is assumed to be connected to the first. The optional value *diameter* (in meters, default=50m) can be specified if only the coordinate of the center of the position is given—then the position is assumed to be circular with the specified diameter. (If multiple coordinates are given for the border of the position, any specified diameter will be ignored.)

- **Boundary:** This entry indicates one of the boundaries in the scenario. It has the format:

  `Boundary` *Name* x_1 y_1 x_2 y_2 ... x_n y_n

  where the coordinates describe the line of the boundary. Each boundary entry describes one boundary. It is likely that several entries will be necessary since many scenarios have several boundarys.

- **Door:** This entry indicates a door object of the overlay. It has the format:

  `Door` *Name* x_1 y_1 x_2 y_2

  where the coordinates describe the line associated with a door. The robot can detect this control measure as a "door object", and can be marked or unmarked.

- **Gap:** This entry indicates a gap. It has the format:

  `Gap` *Name* x_1 y_1 x_2 y_2 [*width*]

  where the coordinates describe a straight line segment from one end of the gap to the other. The final, optional term *width*, is the width of the gap in meters; it defaults to 40m if unspecified.

- **Hallway:** This entry indicates a hallway object of the overlay. It has the format:

  `Hallway` *Name* x_1 y_1 x_2 y_2 x_3 y_3 x_4 y_4 ... x_n y_n

  where the first two points describe the center line of the hallway, and the rest of the points describe a closed polygon. When the robot is inside this polygon, it can be distinguished as it is in the hallway.

- **Line of Departure/Line of Contact:** This entry indicates a line of departure/line of contact. It has the format:

  `LDLC` *Name* x_1 y_1 x_2 y_2 ... x_n y_n

  Note that the friendly forces are assumed to be on the right side of this line (heading from its beginning towards its end).

- **Objective:** This entry indicates an objective. It has the format:

  `OBJ` *Name* x_1 y_1 x_2 y_2 ... x_n y_n [*diameter*]

  where the coordinates describe the polygon defining the region involved. The last point is assumed to be connected to the first. The optional value *diameter* (in meters, default=50m) can be specified if only the coordinate of the center of the objective is given—then the objective is assumed to be circular with the specified diameter. (If multiple coordinates are given for the border of the objective, any specified diameter will be ignored.)

- **Object:** This entry indicates a circular object. It has the format:

  `OBJECT` *x y diameter* [Fixed — Movable — Container] "*color*"

  where x and y specify the center of the obstacle and *diameter* gives its diameter, all in meters. The three classes of objects are as follows:

  - Fixed objects can not be moved and are usually obstacles
  - Movable objects can be manipulated by the robots
  - Container objects can hold movable objects placed there by the robots. Objects in a container are not visible to robots.

- **Passage Point:** This entry indicates a passage point. It has the format:

  `PP` *Name* x y [*diameter*]

  where x and y describe the location of the passage point. The optional value *diameter* (in meters, default=10m) gives the diameter of the passage point.

- **Phase line:** This entry indicates a phase line. It has the format:

  `PL` *Name* x_1 y_1 x_2 y_2 ... x_n y_n

- **Room:** This entry indicates a room object of the overlay. It has the format:

  `Room` *Name* x_1 y_1 x_2 y_2 ... x_n y_n

  where the coordinates describe the closed polygon. When the robot is inside this polygon, it can be distinguished as it is in the room.

- **Starting point:** This entry describes a starting location. It has the format:

  `SP` *Name* x y

- **Wall:** This entry indicates a wall object of the overlay. It has the format:

  `Wall` *Name* x_1 y_1 x_2 y_2 ... x_n y_n

  where the coordinates describe the line of the wall. Each boundary entry describes one wall. As in Boundary, it is likely that several entries will be necessary since many scenarios have several walls. This control measure is implemented with the obstacle functionality. In other words, the robots will avoid the walls as if they are obstacles. Moreover, when the robot is in the detect-object mode, any object which is located beyond this wall cannot be detected, since the robot cannot see through the wall.

- **Waypoint file**: This entry indicates the name of the waypoint file to be loaded. The format is:

  `WAYPOINT-FILE` *Name*

  This line is usually added by *mlab* when the user chooses to save the overlay file after he or she creates waypoints. The extension of the waypoint file is ".wpt", and it contains the coordinates of waypoints described as the passage points (PP). Since the overlay parser expects this entry to be the last entry of control measures, the user cannot write below this line.

3.8.3 Example Overlay Description File

To provide a more concrete feel for what an overlay description file might look like, a sample file is shown in Figure 57. The file does not have the numbers specified.

```
-- THIS IS PART 1: The scenario information

SCENARIO "Demo-C"

SITE "Demo B site, Colorado"

ORIGIN X Y


CONTROL MEASURES:    -- THIS STARTS PART 2: The control measure descriptions

Boundary Yankee x1 y1 x2 y2 ... xn yn

LDLC Echo x1 y1  x2 y2  ...  xn yn

AA Alpha x1 y1  x2 y2  x3 y3 ...  xn yn

ATK Bravo x1 y1  x2 y2  x3 y3 ...  xn yn

PP Charlie x y

Gap Delta x1 y1  x2 y2

Axis Foxtrot x1 y1  x2 y2  ...  xn yn

PL Gamma x1 y1  x2 y2  ...  xn yn

BP 1 x1 y1  x2 y2  ...  xn yn

BP 2 x1 y1  x2 y2  ...  xn yn

OBJ Zulu x1 y1  x2 y2  ...  xn yn

OBSTACLE x1 y1 10.0
```

Figure 57: Sample Overlay Description File.
(Obviously the x and y values would be replaced by actual numbers.)

3.9 *HServer* (Hardware Server)

HServer provides a control interface to all the robot hardware, and you can monitor and configure the hardware through this interface. If you create a robot mission using *CfgEdit* (Section 3.4), and wish to run it on a real robot, the robot executable will serve as *HClient* and talk to *HServer* using IPT (Section 4.1). *HServer* contains all the hardware drivers, and can control the robot hardware exactly as the robot executable requested. Thus, the robot executable does not even need to know what type of robots it is running on. Since *HClient* and *HServer* communicate each other through IPT, the robot executable is not required to run on the same machine as *HServer*. By separating the hardware drivers from the robot executable binary, *CfgEdit* can compile the mission with less time, and since *HServer* is multithreaded (pthreads), it provides the ability to block on serial reads. If the hardware control was in the robot executable, no blocking I/O would have to be utilized. Moreover for developers, since *HServer* provides a standard framework for all the hardware drivers, it minimizes the work needed to integrate new hardware into the existing system. *HServer* can control the following hardware:

- Pioneer AT robot (ActivMedia) via serial
- EVI-D30 camera (Sony) via serial
- LMS200 Laser scanner (SICK Optic Electronic) via serial
- Urban Robot[9] (Real World Interface) via TCP/IP [*mobility*]
- Nomad 150/200 robot (Nomadic Technologies, Inc.) via serial or TCP/IP
- Cognachrome Vision System (Newton Research Labs.) via serial
- BT848 Video Framegrabber via /dev/video

3.9.1 Command line arguments

The followings are the command line arguments *HServer* can take. If you run *HServer* with no arguments, it starts up with no hardware connections. Hardware can be then connected via keyboard commands.

`-c` *port_number*	Connect Sony EVI-D20 camera on /dev/ttyS<*port_number*>
`-l` *port_number*	Connect SICK LMS200 laser scanner on /dev/ttyS<*port_number*>
`-m` *port_number*	Connect Newton Cognachrome Vision System on /dev/ttyS<*port_number*>
`-n` *port_number*|*hostname*	Connect Nomad 150 on /dev/ttyS<*port_number*> or Nomad 200 via TCP/IP to <*hostname*>
`-p` *port_number*	Connect Pioneer AT on /dev/ttyS<*port_number*>
`-u`	Connect RWI Urban Robot via *mobility*
`-v`	Connect BT848 Video Framegrabber on /dev/video
`-r`	*HServer* IPT name defaults to "fred"
`-b`	Display battery information

[9] To run Urban Robot, *HServer* has to be compiled with RWI's *mobility* by "make hserver_mobility". Because of the copyrights, however, *mobility* is not included in the *MissionLab* distribution. See http://www.isr.com/rwi/index.html for how to obtain *mobility*.

`-a` Connect to *iptserver* and listen for the connection with *HClient* of the robot executable

`-f` Connect to an emulated robot "fred"

`-i` *hostname* Set IPT name to <*hostname*>

3.9.2 Environment Variables

For your convenience, you can set the following variables in your environment:

`HSERVER_USE_MLAB` If this variable is set in your environment, *HServer* will default to listening for *HClient* of the robot executable. It is same as starting *HServer* with "-a" option

`IPTHOST` Hostname for IPT. If this variable is not set, it defaults to local host.

3.9.3 User Interface and Key Commands

- **Main Window**: The main window is divided into two sections (Figure 58). The top section are the status bars for the requested hardware. These status bars indicate the current state of the hardware and other information. The lower section of the main window is for general output. All error and debugging information will be displayed here. The main window accepts commands to start new hardware and to bring up control menus for connected hardware.

Figure 58: *HServer* - main window

The following key commands are accepted by the main window.

`B` Display laptop battery information if it is available

`C` Start Sony EVI-D30 camera if not connected or show the camera control menu

`c` Clear text window

`D` Change report levels

`E` Display the sensors window

`F` Start emulated robot or show the emulated robot control menu

`h` Toggle the showing of the help window

`L` Start SICK laser scanner or show the laser control menu

`M` Start Newton Cognachrome Vision System or show the Cognachrome control menu

`N` Start Nomad 150/200 robot or show the Nomad control menu

`P` Start ActivMedia Pioneer AT robot or show the Pioneer AT control menu

`Q` Disconnect all hardware and exit

`R` Show the remote control

`r` Refresh screen

`S` Show the robot setup window

`T` Start terminal if it is not connected or show the terminal window

`U` Start RWI Urban Robot or show the Urban Robot control window

`V` Start video or show video control window

`X` Create xwindow or show xwindow

- **Help Window**: This window gives a listing of the keyboard commands accepted by the main window. This window will pop-up or pop-down by pressing "h" key.

- **Message Window**: This window is a multi-purpose window which pops up at the center of the main window, displaying "HServer Georgia Institute of Technology ...", initially. It displays prompts for input and also hardware control menus for individual hardware. This window can be moved by using the arrow keys or the numeric keypad (with numlock on).

- **Terminal Window**: This window, which pops up by pressing "T" key, is for direct connection to a serial device. It takes input from the keyboard and outputs it to the serial port and writes data received from the serial port to the window. Terminal window commands are initiated with the escape key. If you wish to send an escape character[10] (0x1B) over the serial line press the escape key twice. The followings are key commands that supported by the window:

  `d` Disconnect terminal and close window

  `e` Erase terminal window

  `h` Toggle hex mode - all data from the serial port is printed out in hexadecimal

  `C` Toggle cognachrome mode - only outputs data received on the current watched stream

  `c` Change cog stream

  `p` Send "q" as saphira packet - quits saphira mode on cognachrome

  `r` Refresh screen

  `l` Toggles log mode - Terminal output is logged to hserver.log file

  `x` Hide the terminal window

- **Robot Setup Window**: This window gives a readout of the current robot setup. This window will pop up by pressing "S" key from the main window.

- **Remote Control Window**: This window provides capability of driving the robot or moving the camera manually. Please note that when this window is up, the commands from *HClient* (*MissionLab* robot executable) do not get received. Thus, make sure to pop down this window when you are running a mission created from *CfgEdit*. This window will pop up by pressing "R" key from the main window. The followings are the key commands you can use to control the robot and/or camera:

[10] Note that because *HServer* uses ncurses there is an unavoidable delay associated with the escape character.

`i` Move the robot forward

`j` Move the robot to the left

`l` Move the robot to the right

`k` Move the robot backward

`n` Lift the left arm of the robot (Urban Robot)

`m` Lift the right arm of the robot (Urban Robot)

`p` Increase the speed of the robot

`;` Decrease the speed of the robot

`<space>` Stop the robot movement

`u` Stop the linear motion of the robot, but continue on the angular motion

`o` Stop the angular motion of the robot, but continue on the linear motion

`,` Stop the movement of the robot arm (Urban Robot)

`w` Tilt the camera upward

`a` Pan the camera to the left

`d` Pan the camera to the right

`s` Tile the camera downward

`0` Set the camera angle to be its center position

`q` Zoom in the camera view

`z` Zoom out the camera view

`e` Increase the speed of the camera movement

`c` Decrease the speed of the camera movement

`t` Turn on/off the teleport mode - when *HServer* is in the teloport mode, "i", "j", "l", and "k" keys will relocate the robot position, and "u", and "o" will reset its heading

`x` Exit control menu

- **Pioneer Control Menu**: This window handles the miscellaneous controls of Pioneer AT robot. This window will pop up by pressing "P" key from the main window.

  `d` Disconnect Pioneer AT

  `p` Turn on/off sonar sensors

  `r` Refresh screen

  `x` Exit control menu

- **Nomad Control Menu**: This window handles the miscellaneous controls of Nomad 150/200 robot. This window will pop up by pressing "N" key from the main window.

  `d` Disconnect Nomad

  `+-` Change sonar sensor fire rate

  `z` Zero robot

  `r` Refresh screen

  `x` Exit control menu

- **Urban Robot Control Menu**: This window handles the miscellaneous controls of Urban Robot. This window will pop up by pressing "U" key from the main window.

  `d` Disconnect Urban Robot

`r` Refresh screen

`x` Exit control menu

- **Sensors Window**: This window gives a listing of the robot sensors and current sensor information. It is updated twice a second. This window will pop up by pressing "E" key from the main window.

- **Camera Control Menu**: This window handles the miscellaneous controls of Sony camera. This window will pop up by pressing "C" key from the main window.

  `d` Disconnect camera

  `t` Set tracking mode - supporting the following modes:

  - `none`: No tracking
  - `center`: Center camera
  - `sweep X`: Sweep pan back and forth
  - `sweep Y`: Sweep tilt back and forth
  - `sweep XY`: Sweep from (min pan,0 tilt) ⇒ (max pan,0 tilt) ⇒ (max pan,max tilt) ⇒ (min pan,max tilt)
  - `largest object [cognachrome]`: Track largest object on all three channels
  - `largest A [cognachrome]`: Track largest object on channel A
  - `largest B [cognachrome]`: Track largest object on channel B
  - `largest C [cognachrome]`: Track largest object on channel C
  - `closest laser reading`: Track pan to face closest laser reading

  `r` Refresh screen

  `c` Center camera

  `p` Toggle camera power

  `x` Exit control menu

- **Laser Control Menu**: This window handles the controls of SICK laser scanner. This window will pop up by pressing "L" key from the main window.

  `d` Disconnect laser

  `s` Stream laser readings over TCP/IP

  `r` Refresh screen

  `x` Exit control menu

- **Cognachrome Control Menu**: This window handles the controls of Newton Cognachrome Vision System. This window will pop up by pressing "M" key from the main window.

  `0-2` Set channel to train and view

  `t` Train on center color

  `i` Incremental train center

  `< >` Shrink/grow colors

  `S R` Save/Restore EEPROM

  `c` Toggle crosshairs

  `- +` Adjust filter level

  - `Level 0`: recognizes objects one pixel wide
  - `Level 1`: 2 pixels
  - `Level 2`: 3 pixels

  - `Level 3`: 4 pixels

`d` Disconnect cognachrome

`z` Toggle color tracking

`[]` Adjust object size used to calculate distance

`x` Exit control menu

- **Video Control Menu**: This window handles the controls of BT848 video framegrabber. This window will pop up by pressing "V" key from the main window.

`d` Disconnect video

`0-2` Set channel to digitize

`!@#$` Set capture size to:

  - `!`: 160x120
  - `@`: 320x240
  - `#`: 480x360
  - `$`: 640x480

`c` Capture frame - if the xwindow is open output to xwindow (see below), otherwise write to "video_cap.ppm"

`r` Refresh screen

`x` Exit control menu

- **Xwindow**

This window is for displaying images captured by the video framegrabber. This window will pop up by pressing "X" key from the main window.

`Q` Closes xwindow

- **Emulated Robot Control Menu**: The emulated robot (Fred) emulates the movement of an actual robot without actually running the hardware of those. Event though it is similar to the *MissionLab* simulation capability, the movement of the emulated robot is based on the kinematics of the Pioneer AT and Urban Robot hardware while the *MissionLab* simulation assumes that these robots are holonomic. This window can pop up by pressing "F" from the main window.

`d` Disconnect the emulated robot

`i` Initializes the emulated robot location to be to <5, 5>, and its heading to be 0.

4 Support Software

Several existing software packages were used in the development of *MissionLab*. These packages are described briefly here.

4.1 Communications Software IPT

Communication between the robot programs and the console program (*mlab*) is accomplished using the communication package IPT [5]. IPT is a transaction-oriented communication layer that sits above NSF sockets to simplify their use. As was described in Section 3.1, an IPT name server must be executing to enable the robots to find the console. *MissionLab* was developed with IPT version 8.4 but other versions of the IPT server will probably work.

4.2 Process Control Software C-Threads

The robot programs use the C-Threads process control software to control execution of the various sub-processes. C-Threads is a light-weight non-preemptive user level process scheduler package developed at Georgia Tech [9] to support multiprocessor computers. It allows development of multi-threaded programs which at run time can take maximum advantage of the available free processors. Support for inter-thread communication and synchronization mechanisms are also provided.

In the robot program, the Configuration Network Language compiler (the *cnl* compiler) instantiates each node (primitive behavior) as a separate thread of execution using the C-threads package. There exists the notion of a "cycle" where execution of each thread (node) occurs once and only once per cycle. This guarantees that the data flowing between nodes is synchronized. This means that within a single cycle, a node will not execute until all of the nodes providing it with input values have executed.

Currently, generated robot executables do not take advantage of multiple processors. That would be a simple extension from the compiler standpoint, but providing mechanisms for the designer to suggest groupings of nodes will require some thought. Good choices of groupings are necessary to reduce inter-nodal communication overhead.

5 Current Limitations of *MissionLab*

This is a preliminary version of the software and a number of features are not completely implemented. The following list describes some of the known limitations.

- *mlab* halts immediately when the 3D mode is enabled.
- *CfgEdit* prints out several running warnings on Motif errors when it is compiled on a RedHat Linux 6.2 machine.
- The color of *mlab* robots showing up on certain computer monitors is not the right color. For example, even though a robot is supposed to be blue, the PC or SGI screen displays it with yellow.
- If "Run" in the *CfgEdit* was selected, it runs with "mlab -R" option, whose pop-up window asks users to select an overlay to be used for the mission. The default overlay, which is automatically loaded before the pop-up window asks, is "Empty.ovl", and this overlay has to be in the path ".cfgeditrc" specified. However, currently, users cannot choose multiple directories for the overlay location. In other words, there will be a problem if users want to select an overlay which is not in the same directory as "Empty.ovl".
- When "mlab -R some_cmdl" was executed, *mlab* at first loads overlay which is in the cmdl file. (Let's say, "default.ovl" was specified by cmdl file.) Now, because of this "-R" option, *mlab* will show the list of overlay files that are in the directory ".cfgeditrc" specified, so that users can chose the overlay which is suited for the mission. (Let's say, the user wants "mission_A.ovl".) The bug is that if the robot is supposed to start at StartPlace and there are different StartPlaces between "default.ovl" and "mission_A.ovl", then *mlab* chooses the one in "default.ovl" instead of the one in "mission_A.ovl".
- *mlab* cannot execute the next command in cmdl when it is running robots with the following situation: Suppose CarRobot, created by *CfgEdit*, moves back-and-forth on a road, and scout-robots trying to cross the road by going through multiple points. The first command is to start CarRobot and scout-robots, and the 2nd command is to move scout-robots to another point. The problem here is cmdl cannot get to the 2nd command because the CarRobot never stops. It needs some way to parallel process each "Command List", so that the CarRobot can be executed in the background while scout-robots execute the commands in the other command list, sequentially.
- *mlab* has several serious memory bugs when it attempts to load command files, which may cause a crash. The bug erupts when trying to execute a "NEW-ROBOT" command without all the parameters listed. There is a workaround - specify the entire command line for the NEW-ROBOT command.
- The flexibility of the command description language is limited. Future versions will increase its generality but will also probably change its syntax considerably.
- The command FOLLOW is not implemented yet in the robot program.
- Bounding overwatch and traveling overwatch are not implemented.
- Only a limited set of overlay control measures are implemented.
- Control measures must be manually laid out in the overlay description file. Future versions may allow interactive placement of the control measures.
- Some polyline control measures (such as LD/LC) are currently drawn based only on the first and last points.
- Boundaries are currently ignored by the robots.
- Although phase lines can be given, they are ignored in the execution of mission plans.

- The value that the time scale dialog box changes is the amount of simulated time that each robot sense/compute/act cycle takes. In other words, this controls how far the robots move per cycle rather than how fast the steps are taken. This does not mean that the simulation will run that fast (unless it is controlling a real robot). The speed of the execution depends on the power of the host computer.

6 Feedback and Bug Reports

We welcome your feedback about this software. One of the purposes of releasing this software is to get some feedback from other researchers. We very much want to receive any suggestions, complaints, or questions about *MissionLab*. Theoretical and administrative questions should be addressed to:

Prof. Ronald Arkin
College of Computing
Georgia Institute of Technology
801 Atlantic Dr.
Atlanta, GA 30332-0280
arkin@cc.gatech.edu

If you encounter a bug, please document it as completely as possible and send that information to us via email to `mlab@cc.gatech.edu`.

References

[1] Arkin, R.C. *Behavior-Based Robotics.* Cambridge, the MIT Press, 1998.

[2] Arkin. R.C. "Motor Schema-Based Mobile Robot Navigation", *International Journal of Robotics Research*, Vol. 8, No. 4, August 1989, pp. 92-112.

[3] Arkin, R.C., Collins, T.R., and Endo, Y. "Tactical Mobile Robot Mission Specification and Execution." *Proceedings of SPIE.* Vol. 3838 (Mobile Robots XIV). 1999

[4] Balch, T. and Arkin, R.C. "Communication in Reactive Multiagent Robotic Systems," *Autonomous Robots*, Vol. 1, 1994, pp. 1-25.

[5] Fedor, C. "TCX: Task Communication," (User manual for TCX, available through the Robotics Institute), Carnegie Mellon University, Feb. 15, 1993.

[6] Lee, B., and Hurson, A.R. "Dataflow Architectures and Multithreading," *IEEE Computer*, August 1994, pp. 27-39.

[7] Lyons, D.M. and Arbib, M.A. "A Formal Model of Computation for Sensory-Based Robotics", *IEEE Journal of Robotics and Automation*, Vol. 5, No. 3, June 1989, pp. 280-293.

[8] MacKenzie, D.C. and Arkin, R.C. "Formal Specification for Behavior-Based Mobile Robots," SPIE Mobile Robots VIII, Boston, MA, November 1993.

[9] Schwan, K., et. al. *A C Thread Library for Multiprocessors*, Georgia Tech Technical report #GIT-ICS-91/02, 1991.