Interaction

CS 4460 – Intro. to Information Visualization
November 4, 2014
John Stasko

Interaction?

- What do you mean by "interaction"?

1

Background

- Interaction (HCI)
  - = "The communication between user and the system" [Dix et al., 1998]
  - = "Direct manipulation and instantaneous change" [Becker et al., 1987]

    "HCI research is far from having solid (and falsifiable) theories of interaction"
    [Beaudouin-Lafon, 2004]

Clarifying...

Interaction

Being interactive, not static

Today's focus

Versus

Interaction

Communication, analytic discourse

Main Components

"The effectiveness of information visualization hinges on two things: its ability to clearly and accurately represent information and our ability to interact with it to figure out what the information means."

S. Few
Now You See It, p. 55

"Little Brother"

- Two main components in an infovis
  – Representation
  – Interaction

- Representation gets all the attention
- Interaction is where the action is (no pun intended)

3

Research Focus

- Very challenging to come up with innovative, new visual representations
- But can do interesting work with how user interacts with the view or views
  - It's what distinguishes infovis from static visual representations on paper

- Analysis is a process, often iterative with branches and side bars

Interaction

- How do you define "interactive"?

Response Time

- .1 sec
  - animation, visual continuity, sliders
- 1 sec
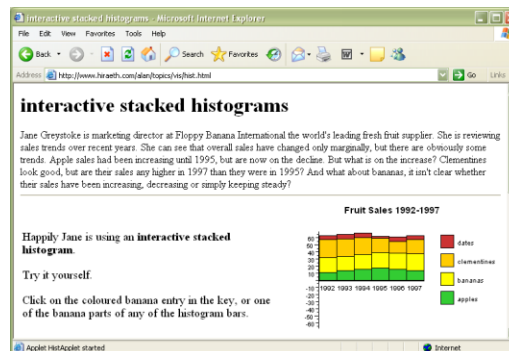 - system response, conversation break
- 10 sec
  - cognitive response

Example

Even simple interaction can be quite powerful

Stacked histogram

`http://www.hiraeth.com/alan/topics/vis/hist.html`

5

Interaction Types

- Dix and Ellis (AVI '98) propose
  - Highlighting and focus
  - Accessing extra info – drill down and hyperlinks
  - Overview and context – zooming and fisheyes
  - Same representation, changing parameters
  - Linking representations – temporal fusion

Interaction Types

- Keim's taxonomy (TVCG '02) includes
  - Projection
  - Filtering
  - Zooming
  - Distortion
  - Linking and brushing

Another Taxonomy

- Operator
  - navigation, selection, manipulation, distortion, filtering
- Space of interaction
  - screen, data value, data structure, attribute, object, visualization structure
- Parameters of the interaction operator
  - focus, extents, transformation, blender

Ward, Grinstein, & Keim
2010, chapter 10

Few's Principles

- Especially useful ways of interacting with data
  - Comparing
  - Sorting
  - Adding variables
  - Filtering
  - Highlighting
  - Aggregating
  - Re-expressing
  - Re-visualizing
  - Zooming and panning
  - Re-scaling
  - Accessing details on demand
  - Annotating
  - Bookmarking

Now You See It
Chapter 4

Details

- Sorting (for example)
  - Provide a selection of graphs that support the full spectrum of needed comparisons
  - Provide graphs that are designed for easy comparison of those values and relevant patterns without distraction
  - Provide the means to place a great deal of information that we wish to compare on the screen at the same time, thereby avoiding the need to scroll or move from screen to screen to see the information

Great design checks for your visualization systems

Challenging

- Interaction seems to be a difficult thing to pin down and characterize

- Let's go back to the user trying to solve problems…
  - User-centered versus system-centered characterizations

Another take

Toward a Deeper Understanding of the Role of
Interaction in Information Visualization

Ji Soo Yi, Youn ah Kang, John T. Stasko, *Member, IEEE,* and Julie A. Jacko

Abstract—Even though interaction is an important part of information visualization (Infovis), it has garnered a relatively low level of attention from the Infovis community. A few frameworks and taxonomies of Infovis interaction techniques exist, but they typically focus on low-level operations and do not address the variety of benefits interaction provides. After conducting an extensive review of Infovis systems and their interactive capabilities, we propose seven general categories of interaction techniques widely used in Infovis: 1) Select, 2) Explore, 3) Reconfigure, 4) Encode, 5) Abstract/Elaborate, 6) Filter, and 7) Connect. These categories are organized around a user's intent while interacting with a system rather than the low-level interaction techniques provided by a system. The categories can act as a framework to help discuss and evaluate interaction techniques and hopefully lay an initial foundation toward a deeper understanding and a science of interaction.

1   INTRODUCTION

Information visualization (Infovis) systems, at their core, appear to have two main components: representation and interaction. The representation component, whose roots lie in the field of computer graphics, concerns the mapping from data to representation and how that representation is rendered on the display. The interaction component involves the dialog between the user and the system as the user explores the data set to uncover insights. The interaction component's roots lie in the area of human-computer interaction (HCI). Although discussed as two separate components, representation and interaction clearly are not mutually exclusive. For instance, interaction with a system may activate a change in representation. Nonetheless, the two components seem to compose the two fundamental aspects of Infovis systems, and it seems reasonable to consider what each contributes to an end-user's

and jotting down notes on the poster). Spence even suggests the notion of "passive interaction" through which the user's mental model on the data set is changed or enhanced [38]. Finally, through interaction, some limits of a representation can be overcome, and the cognition of a user can be further amplified (e.g., [15, 29]).

The importance of interaction and the need for its further study seem undisputed. For example, the recent book *Illuminating the Path: The Research and Development Agenda for Visual Analytics* calls for further research on interaction:

"**Recommendation 3.3: Create a new science of interaction to support visual analytics.** The grand challenge of interaction is to develop a taxonomy to describe the design space of interaction techniques that supports the

IEEE TVCG 13(6), '07

Study Methodology

- Survey
  - 59 papers
    Papers introducing new interaction systems
    Well-known papers in subareas of Infovis
  - 51 systems
    Commercial Infovis Systems (SeeIT, Spotfire, TableLens, InfoZoom, etc.)
  - Collected 311 individual interaction techniques
- Affinity Diagram Method

Focus Emerged

User intent

"What a user wants to achieve through a specific interaction technique"

Main Idea

- Don't focus so much on particular interactive operations and how they work

- Interaction is ultimately being done by a person for a purpose
    - Seeking more information, solving a problem
    - Fundamental aspect of exploratory, analytic discourse

Results

7 categories
Select
Explore
Reconfigure
Encode
Abstract/Elaborate
Filter
Connect

1. Select

"Mark something as interesting"

- Mark items of interest to keep track
- Seems to often work as a preceding action to subsequent operations.

e.g.,
- Selecting a placemark in Google Map
- The Focus feature in TableLens

Pop-up tooltips

- Hovering mouse cursor brings up details of item
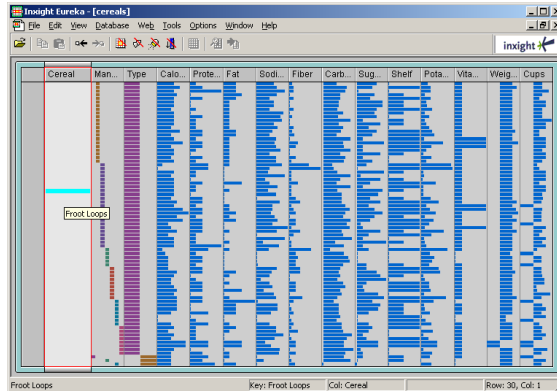
Mouse Selection

Clicking on an item selects it and attributes of the data point are shown

Selected item

Attributes
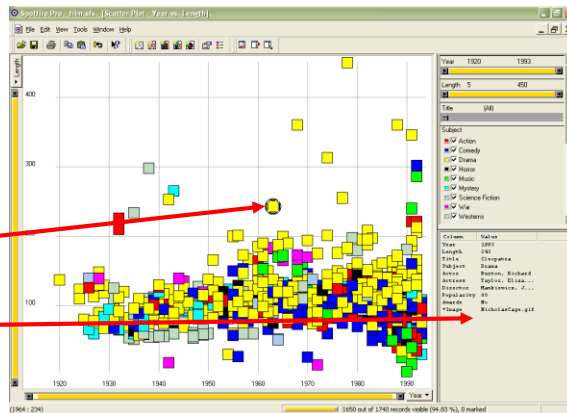
Challenge

- Where are the labels?
  - Labeling is difficult to do when so many entities exist
  - Can add to ball of string problem

Excentric Labeling

Description boxes containing the name of the data point

Area of focus

Line and box color match the color of the data point
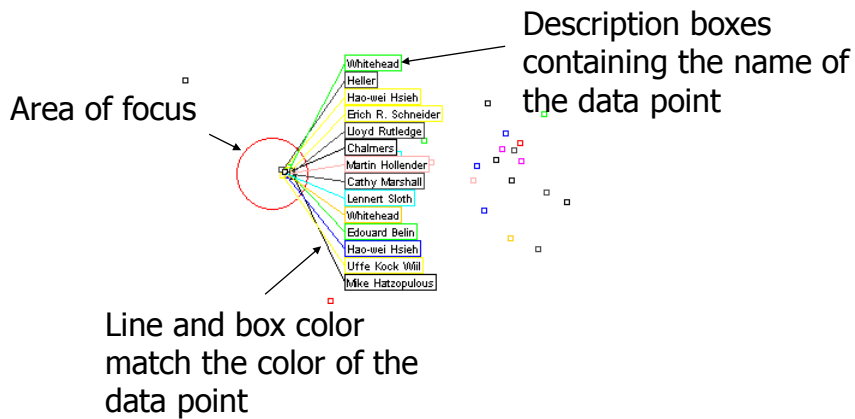
Fekete and Plaisant
CHI '99

Being Excentric

- "Invisible" – Does not appear until user hovers over data points
- Describes data points using the name field
- Visually connects labels with data points
- Can order labels to indicate graph position

Demos at http://www.cs.umd.edu/hcil/excentric

Generalized Selection

- When you click on an item in a visualization, can we generalize the selection off the precise item?
  - Maybe you want to select items matching some attribute(s) of that item

Query Relaxation
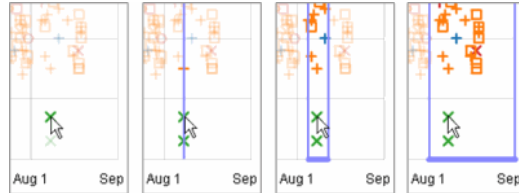
As you dwell on your mouse pick, the selection
criteria broaden and you can choose sets of items

Video

Heer, Agrawala, Willett
CHI '08

2. Explore

"Show me something different"

- Enable users to examine a different subset of
  data
- Overcome the limitation of display size

e.g.,
- Panning in Google Earth
- Direct Walking in Visual Thesaurus

Direct Walk

- Linkages between cases
- Exploring one may lead to another
- Example:
  – Following hyperlinks on web pages

Example

http://www.visualthesaurus.com

Visual Thesaurus

16
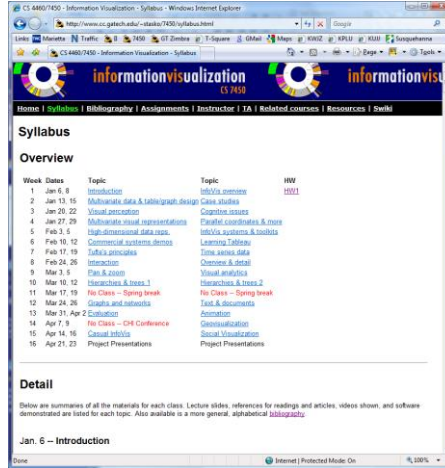
3. Reconfigure

"Show me a different arrangement"

- Provide different perspectives by changing the spatial arrangement of representation

e.g.,
- Sorting and rearranging columns in TableLens
- Changing the attributes in a scatter plot
- The baseline adjustment feature in Stacked Histogram
- The "Spread Dust" feature in Dust & Magnet

Rearrange View

- Keep same fundamental representation and what data is being shown, but rearrange elements
  - Alter positioning
  - Sort

Example
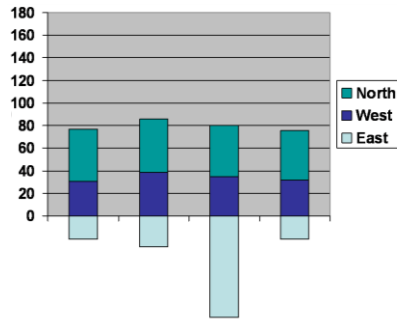
Stacked Histogram

Rearrange

In TableLens
you can move
columns
(attributes)
left and right
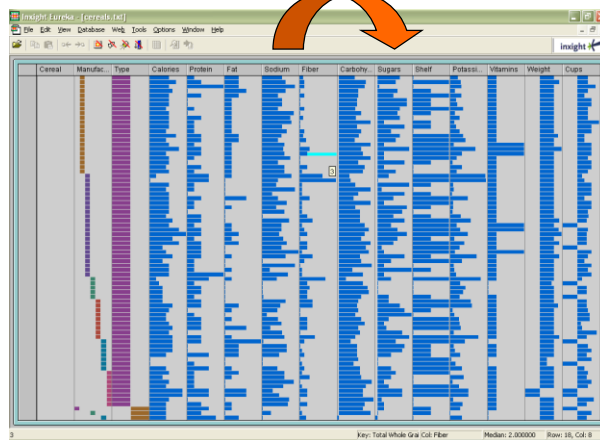
Sorting

Can sort data with respect to a particular
attribute in Table Lens
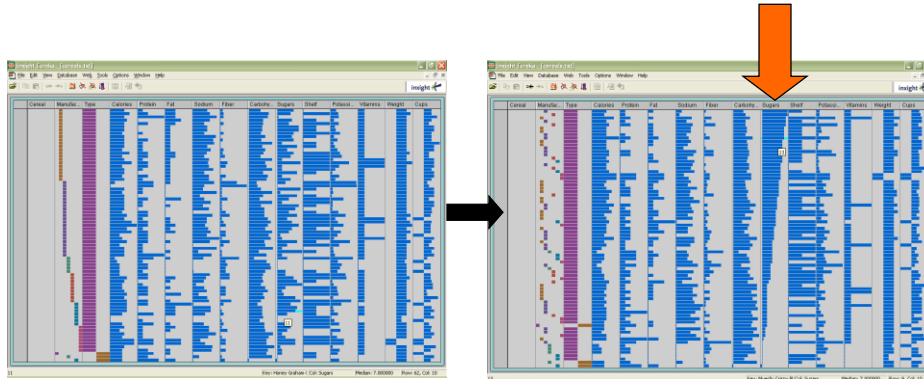
4. Encode

"Show me a different representation"

• Change visual appearances

e.g.,
• Changing color encoding
• Changing size
• Changing orientation
• Changing font
• Changing shape

Changing Representation

- May interactively change entire data representation
  - Looking for new perspective
  - Limited real estate may force change

Example
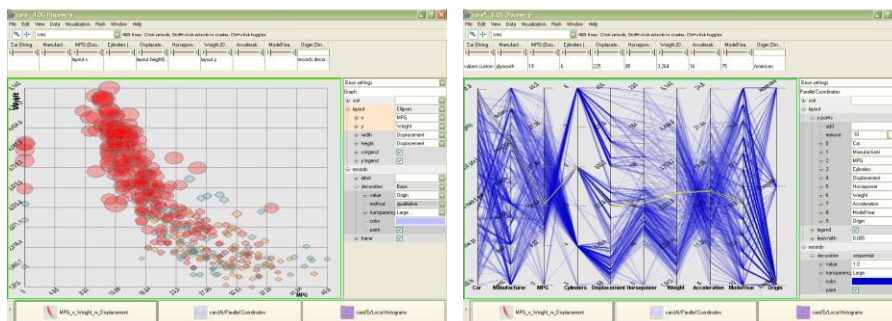
Selecting different representation from options at bottom

5. Abstract/Elaborate

"Show me more or less detail"

- Adjust the level of abstraction (overview and details)

e.g.,
- Unfolding sub-categories in an interactive pie chart
- Drill-down in Treemap
- Details-on-demand in Sunburst
- The tool-tip operation in SeeIT
- Zooming (geometric zooming)

Details-on-Demand

- Term used in infovis when providing viewer with more information/details about data case or cases
- May just be more info about a case
- May be moving from aggregation view to individual view
  - May not be showing all the data due to scale problem
  - May be showing some abstraction of groups of elements
  - Expand set of data to show more details, perhaps individual cases

Examples

SeeIT

Google Earth
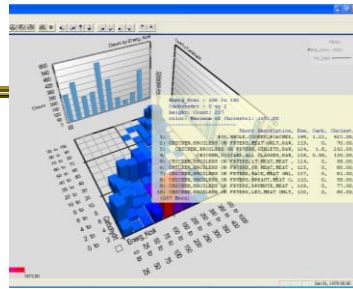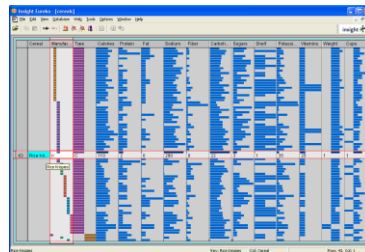
Table Lens

Example

Animated
SunBurst

(a)　(b)　(c)

(d)　(e)　(f)
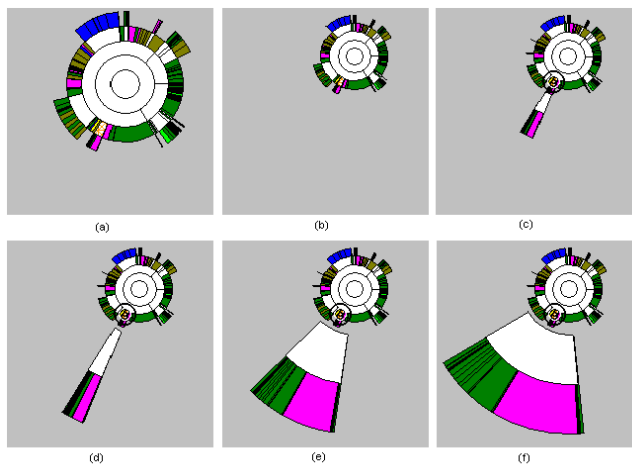
6. Filter

"Show me something conditionally"

- Change the set of data items being presented based on some specific conditions.

e.g.,
- Dynamic query
- Attribute Explorer
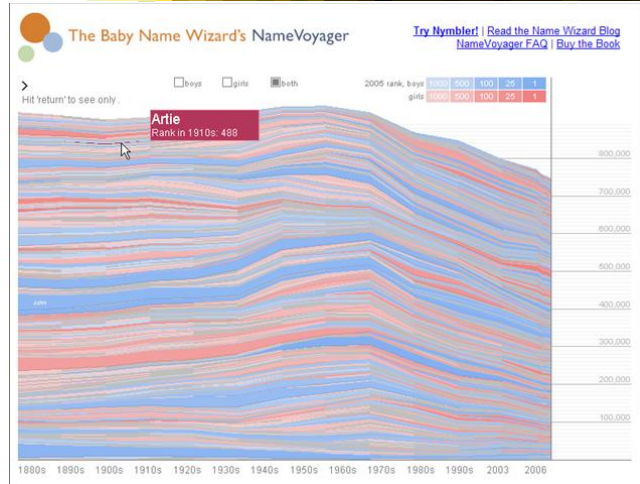- Keystoke based filtering in NameVoyager
- QuerySketch

Filtering/Limiting

- Fundamental interactive operation in infovis is changing the set of data cases being presented
  - Focusing
  - Narrowing/widening

Example
NameVoyager
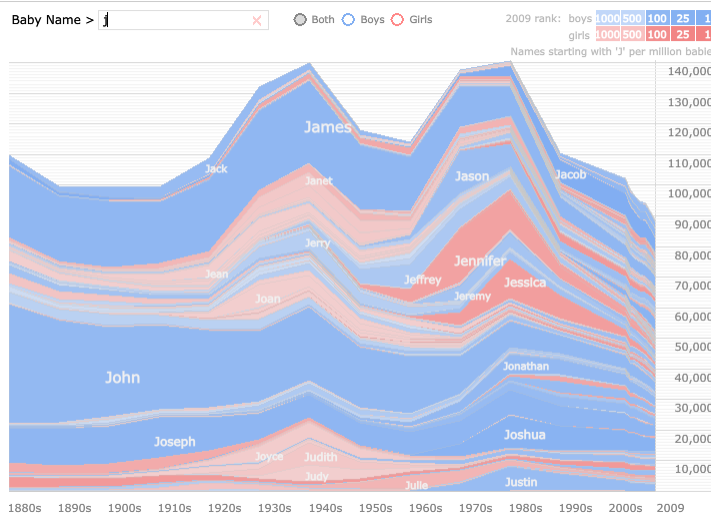
http://www.babynamewizard.com/namevoyager.html/

Filtering

Click a name graph to view that name. Double click to read more about it.
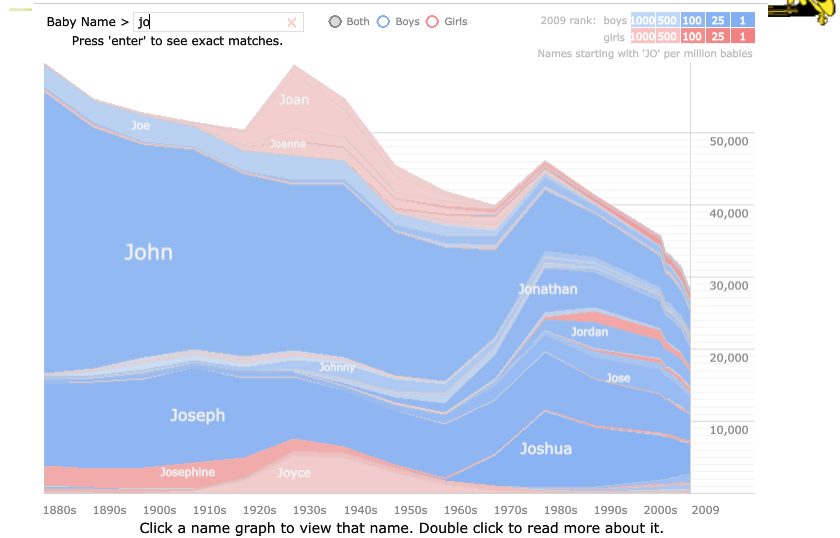
Filtering
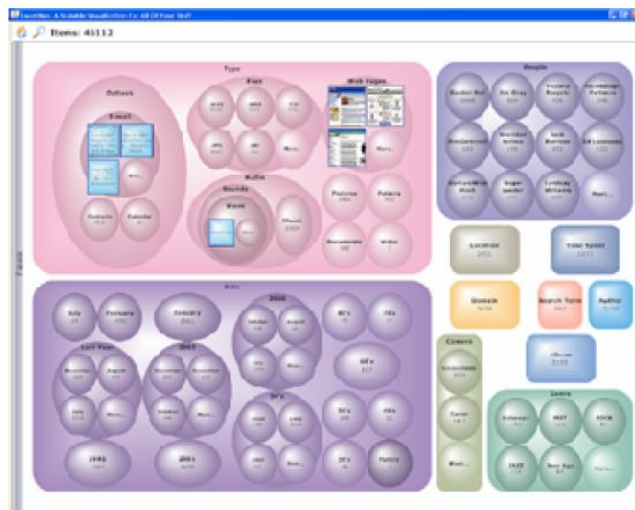
Filtering

Filtering
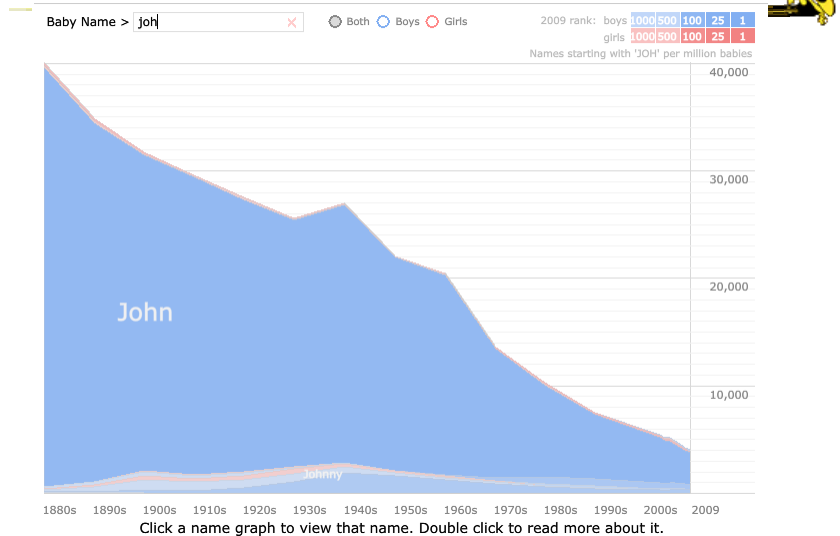
Example

Example

- Faceted metadata
  - Attributes of datasets are grouped into multiple orthogonal categories
  - Selecting a value from one filters on that value and updates the items in other categories
  - User explores data collection by series of selections

FacetMap

Video

Smith et al
TVCG `06

Dynamic Query

- Probably best-known and one of most useful infovis techniques
- Let's explore more details...

DB Queries

- Query language
  - **Select** house-address
    From atl-realty-db
    Where price >= 200,000 **and**
          price <= 400,000 **and**
          bathrooms >= 3 **and**
          garage == 2 **and**
          bedrooms >= 4

DB Queries

- Pros?
  - Powerful, flexible
- Cons?

Typical Query Response

- 124 hits found
  - 1. 748 Oak St. - a beautiful …
  - 2. 623 Pine Ave. -
  - …

- 0 hits found

Further Cons

- Must learn language
- Only shows exact matches
- Don't know magnitude of results
- No helpful context is shown
- Reformulating to a new query can be slow
- ...

Dynamic Query

- Specifying a query brings immediate display of results
- Responsive interaction (< .1 sec) with data, concurrent presentation of solution
- "Fly through the data", promote exploration, make it a much more "live" experience
  - Timesharing vs. batch

Dynamic Query Constituents

- Visual representation of world of action including both the objects and actions
- Rapid, incremental and reversible actions
- Selection by pointing (not typing)
- Immediate and continuous display of results

Shneiderman
IEEE Software '94

Ahlberg & Shneiderman
CHI '94

Imperfection

- Idea at heart of Dynamic Query
  - There often simply isn't one perfect response to a query
  - Want to understand a set of tradeoffs and choose some "best" compromise
  - You may learn more about your problem as you explore

DQ Examples

- ## HomeFinder - Univ. of Maryland

FilmFinder

C. Ahlberg
Maryland

Video
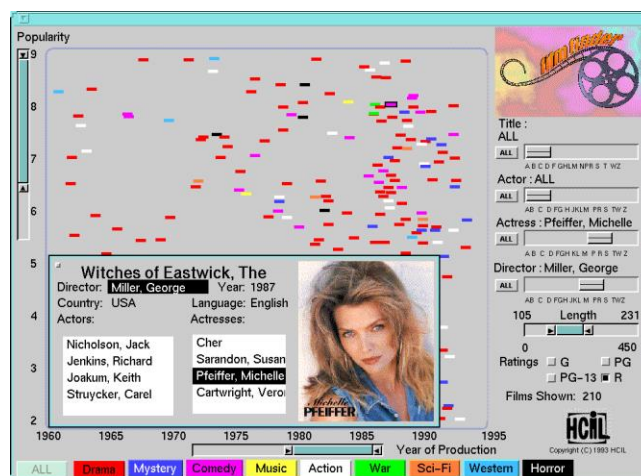
What Did We See?

- Interface
  - buttons
  - sliders (nominal --> ordinal)
  - alphasliders

Query Controls

- Variable types
  - Binary nominal - Buttons
  - Nominal with low cardinality - Radio buttons
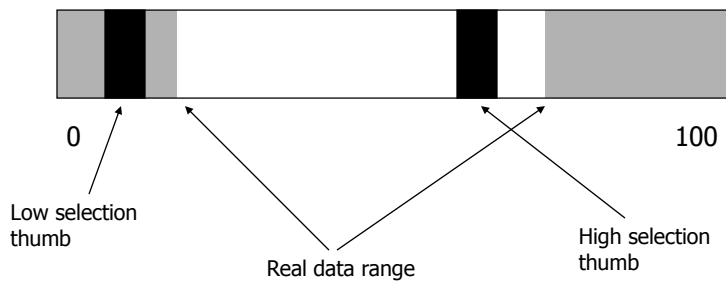 - Ordinal, quantitative - sliders

Alphaslider
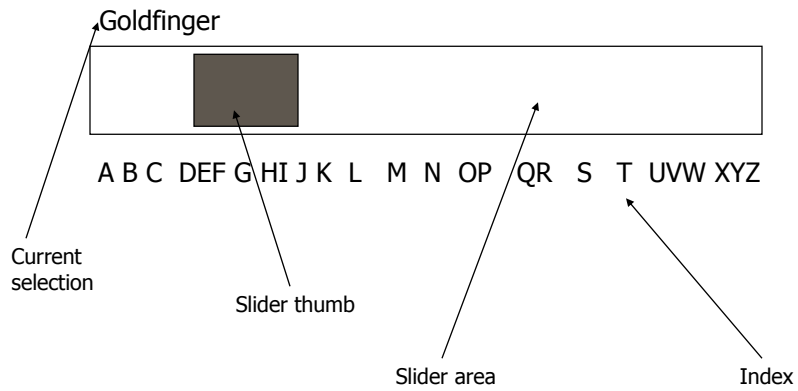
Goldfinger

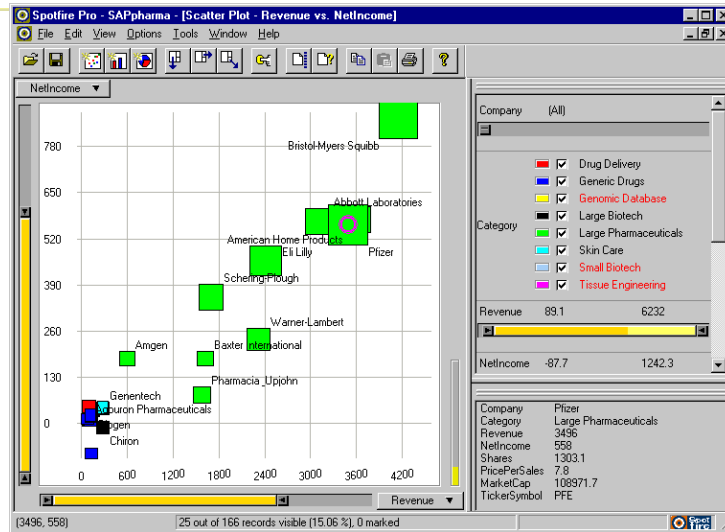A B C DEF G HI J K L M N OP QR S T UVW XYZ

Current
selection

Slider thumb

Slider area

Index

Rangeslider

0

100

Low selection
thumb

Real data range

High selection
thumb

Spotfire

Spotfire Features

- Starfield display
- Tight coupling
  - features to guide the user
  - rapid, incremental, reversible interactions
  - display invariants
  - continuous display
  - progressive refinement
  - details on demand

Another

http://www.bluenile.com/build-your-own-ring/diamonds?elem=sub4&track=hero

DQ Pros

- ?

36

DQ Pros

- Work is faster
- Promote reversing, undo, exploration
- Very natural interaction
- Shows the data

DQ Cons

- ?

DQ Cons

- Operations are fundamentally conjunctive
- Can you formulate an arbitrary boolean expression?
  - !(A1 V A2) ^ A3 V (A4 V A5 ^ A6) V …

- But do people really do this often?

DQ Cons

- Controls are global in scope
  - They affect everything

- Controls must be fixed in advance
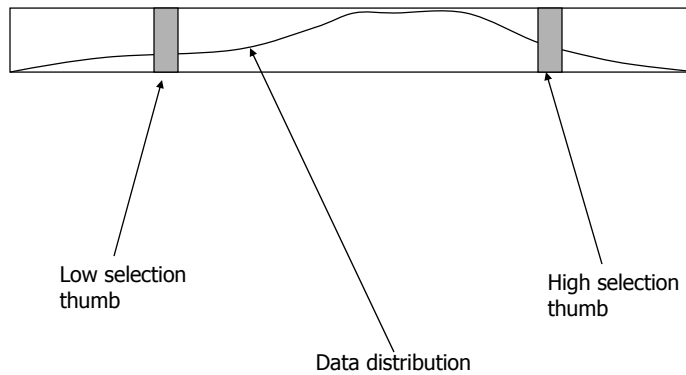
DQ Cons

- Controls take space!
  - How much in Spotfire?

- Put data in controls...

Data Visualization Sliders

Low selection
thumb

High selection
thumb

Data distribution

Eick
UIST '94

DQ Cons

- As data set gets larger, real-time interaction becomes increasingly difficult
- Storage - Data structures
  - linear array
  - grid file
  - quad, k-d trees
  - bit vectors

Tanin et al
InfoVis '97

Brushing Histograms

- Special case of brushing
- Data values represented in histograms that can be clicked on and selected (controls region)
- When items selected there, the corresponding item(s) are highlighted in main view windows
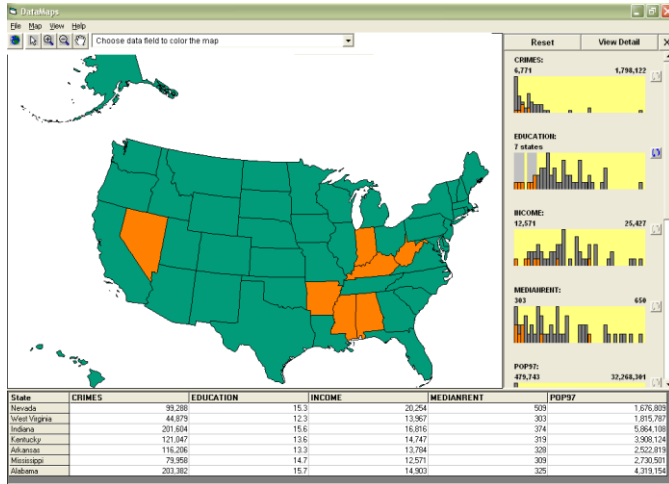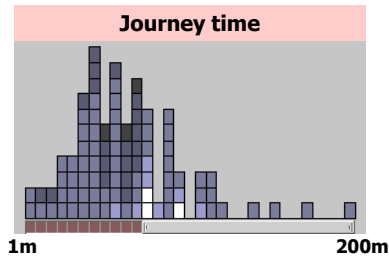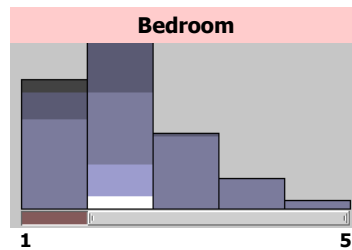
BH Example

DataMaps

Maryland
&
Va Tech

Demo

Attribute Explorer

Spence & Tweedie
Inter w Computers '98

Cost

Bedroom

30K   500K

1   5

Journey time
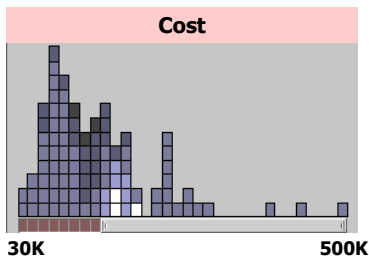
Attribute histogram
All objects on all attribute scales
Interaction with attributes limits
Brushing across views
Color-encoded sensitivity

1m   200m

DQ Disadvantage

- Operations are global in scope
- Can we do something to fix that…?

Magic Lenses
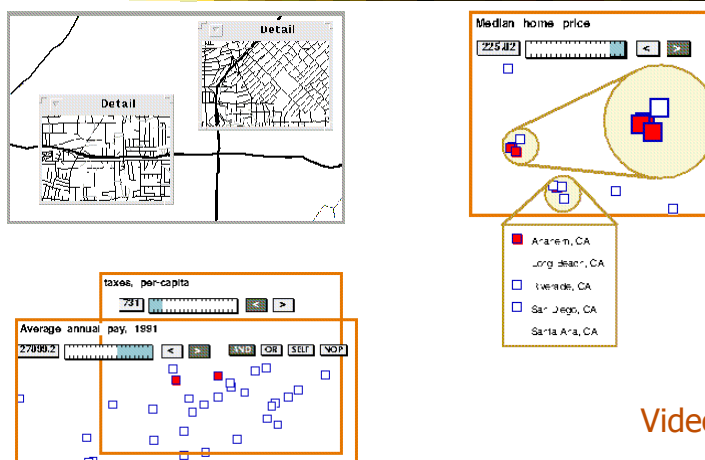

Figure 1(a) High salaries AND low taxes.

Video

Fishkin & Stone
CHI '95

7. Connect

"Show me related items"

- Highlight associations and relationships
- Show hidden data items that are relevant to a specified item

e.g.,
- Highlighting directly connected nodes in Vizster
- Brushing in InfoScope

Highlighting Connections

- Viewer may wish to examine different attributes of a data case simultaneously
- Alternatively, viewer may wish to view data case under different perspectives or representations

- But need to keep straight where the data case is

Brushing

- Applies when you have multiple views of the same data
- Selecting or highlighting a case in one view generates highlighting the case in the other views
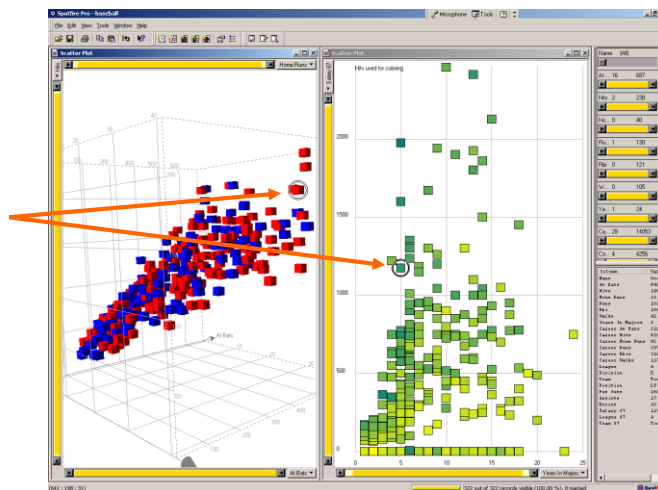- Very common technique in InfoVis

Brushing

Same item

Example

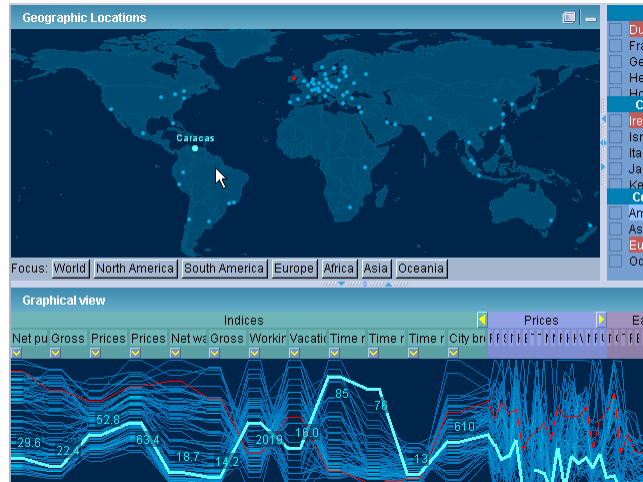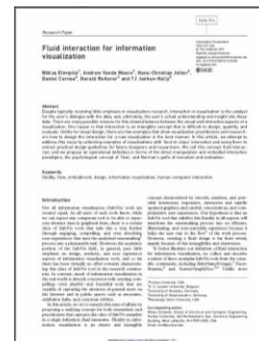InfoScope

Interaction Characteristics

- Fluidity a key
  - Promotes "flow"
    - Balanced challenge
    - Concentration
    - Loss of self-consciousness
    - Transformation of time
    - Prompt feedback
    - Sense of control
    - Intrinsically rewarding
  - Supports direct manipulation
  - Minimizes the gulfs of action

Elmqvist et al
Information Visualization '11

Fluidity Design Guidelines

- Use smooth animated transitions between states
- Provide immediate visual feedback on interaction
- Minimize indirection in the interface
- Integrate user interface components in the visual representation
- Reward interaction
- Ensure that interaction never 'ends'
- Reinforce a clear conceptual model
- Avoid explicit mode changes

Animation for Transitions

- Principles
  - Animation can help "soften the blow" when a view changes
  - Preserve context, allow the viewer to track where things went
- Project overview
  - Developed variety of different transitions and applications
  - Performed experiments to see how these are perceived

Heer & Robertson
TVCG (InfoVis) '07

Transition Types

- View transformation
- Substrate transformation
- Filtering
- Ordering
- Timestep
- Visualization change
- Data schema change

Design Principles

- Congruence (mental matching)
    - Maintain valid data graphics during transitions
    - Use consistent syntactic-semantic mappings
    - Respect semantic correspondence
    - Avoid ambiguity
- Apprehension (easily perceivable)
    - Group similar transitions
    - Minimize occlusion
    - Use simple transitions
    - Use staging for complex transitions
    - Make transitions as long as needed, but no longer

Key Component

- Staging
  - Animation proceeds in stages, not all at once
  - Varies by animation type and view

DynaVis

- Implemented in C# and Direct3D graphics
- Let's see it!

Video

OK

- Let's take a step back and think about representation & interaction again
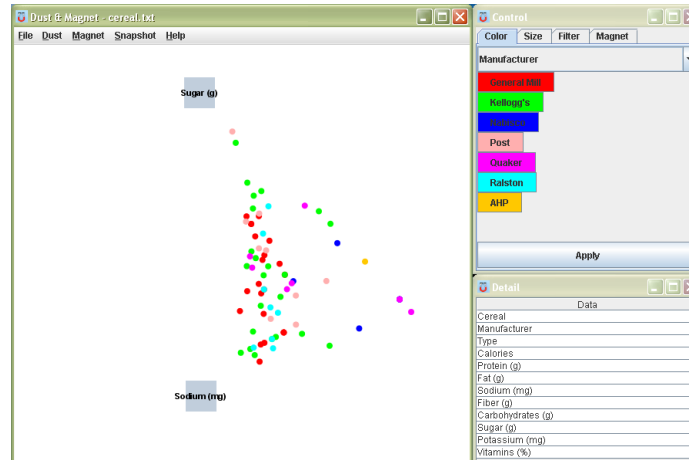
Supporting Representation

- Interaction in many cases is vital to representation
  - Provides useful perspective
    - Many, many examples:
    - Parallel coords, InfoZoom, anything 3D
  - Necessary for clarifying representation
    - Dust & Magnet

Dust & Magnet

Demo

Yi et al
Information Visualization '05

Moving Past WIMP

- WIMP metaphor on desktop machines assumes certain input devices
- How does interaction change when we move to a more mobile platform?
  - Tablet, phone, etc.

Multi-touch InfoVis

- What will it be like to interact with visualizations on a (touch) tablet computer?
  - Lots of UI controls in vis applications
  - Lots of small data objects to manipulate

- Many touch gestures possible, but what are the right ones?
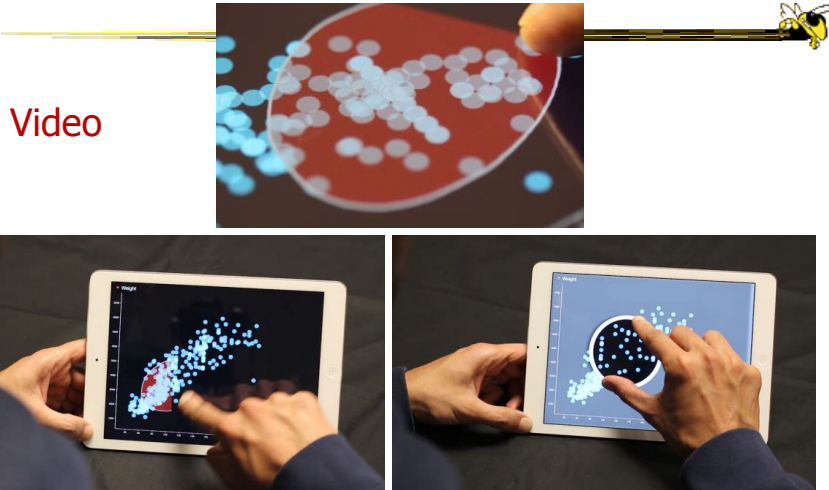
Scatterplot Vis

- Design interactive scatterplot for a tablet
- Identify operations to be supported
- Consider different feasible gestures for each operation
  - Draw upon existing research
  - Consider new gestures
- Prototype ideas with users

Sadana & Stasko
AVI '14

Video

Key Points

- Interaction facilitates a dialog between the user and the visualization system
- Multiple views amplify importance of interaction
- Interaction often helps when you just can't show everything you want

Upcoming

- Commercial Tools
  - Reading:

- Value of Visualization
  - Video lecture

Additional Material

DQ vs. BH

- Empirical Study
  - Use DataMaps, a geographic (US states) data visualization tool
  - Have participants do different tasks with both methods

    How many states have pop between x and y in 1970?

    Given 3 states, which has the lowest median income?

    What's the relationship between education and income?

    List states with pops. 0->x and y->z.

    What kind of a state is Florida?

    Li & North
    InfoVis '03

Findings

Functioned more as its own infovis tool

- Brushing histograms better and more highly rated for more complex discovery tasks
  - Attribute correlation, compare, and trend evaluation
- Dynamic queries better for more simple range specification tasks
  - Single range, multiple ranges, multiple criteria

Functioned more as auxiliary control for other vizs

BH versus DQ

- BH
  - Highlights data of interest
  - Allows multiple ranges of selection
  - Users interact directly with data
  - Displays query results too (I/O)

- DQ
  - Filters out unwanted data
  - Does single range query
  - Users interact with the query (low,hi)
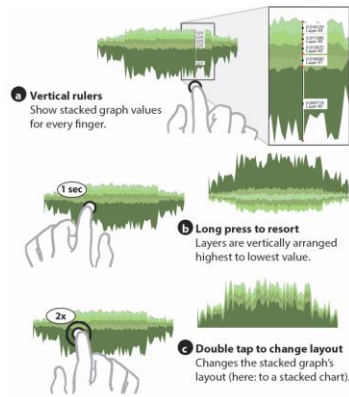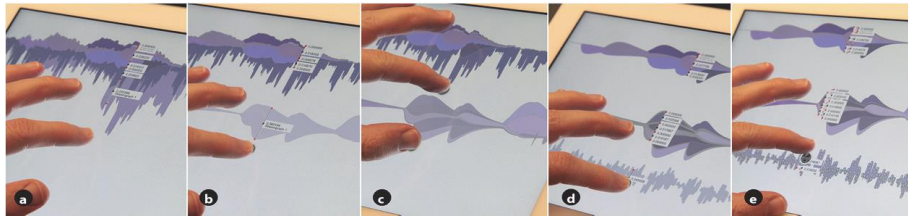 - Visualizes query formulation (1 way)

TouchWave

- Interactions for a stacked graph on a tablet
  - For temporal, hierarchical data
  - Uses multi-touch interactions
  - Seeks to avoid complex gestures

Baur et al
ITS '12

Comparison to WIMP

- On a tablet, compared WIMP-style interactions to multi-touch for a bar chart
- Users did series of tasks (within subjects)
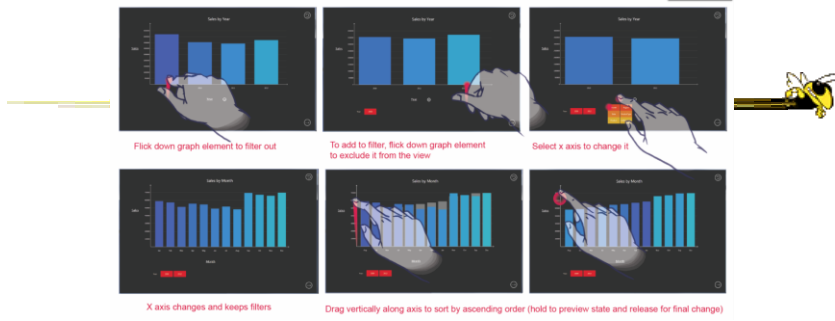- Participants performed better and preferred the touch-based gesture interface
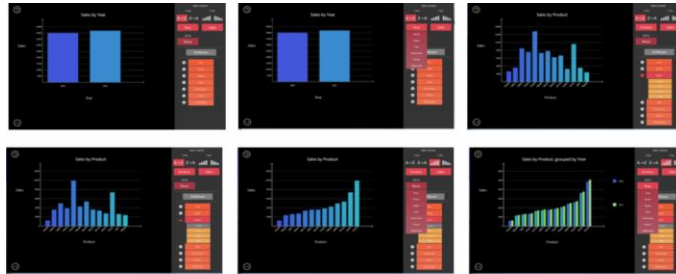
Drucker et al
CHI '13

Flick down graph element to filter out | To add to filter, flick down graph element to exclude it from the view | Select x axis to change it

X axis changes and keeps filters | Drag vertically along axis to sort by ascending order (hold to preview state and release for final change)

versus